



Synergy 21 LED light panel Angel Wings V2 Ersatz Fernbedienung

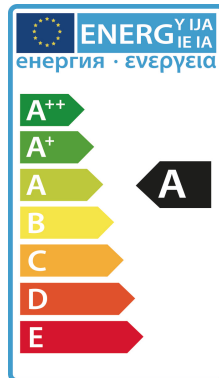

kwh/1000h:	40,00
Lumen:	3200
Watt:	40,0
Nennlebensdauer:	50000 Std.
Schaltzyklen:	50000
Opt. Umgebungstemp.:	25 °C

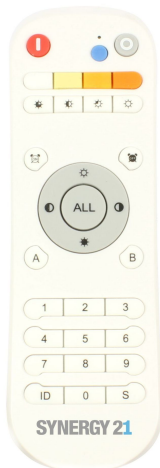

Ersatz Fernbedienung für Angel Wing V2

Wie funktioniert das Anlernen dieser Fernbedienung an das Angel Wing Panel 149407:

1. Machen sie das Angel Wing Panel stromlos.
2. Schalten sie das Panels wieder ein
3. Innerhalb von 10 Sekunden bitte folgendes ausführen:
gewünschte Zonennummer (0-99) drücken und die ID Taste
gewünschte Zonennummer (0-99) drücken und die ID Taste
(ganz wichtig, dass sie diesen Schritt zweimal durchführen)
das Panel wird jetzt einmal kurz aufblinken.
4. Das Panel wieder stromlos machen.(innerhalb der 10 Sekunden)
5. Anmeldevorgang ist beendet
6. Schalten sie das Panel wieder ein und bedienen es mit der Fernbedienung

Weitere Bilder

DIGITAL LIGHTING CONTROLLERS INSTRUCTION

Introduction of Multifunction Remote Controller & Simplified Remote Controller:

Power: Add battery(2). **Dimension:** 48x26x16. **Effective Distance:** 20M (Without Obstacle)

Number of controllable lamps: 1 controller can control 80 groups of lamps, and no limit to the number of lamps in one group.

ID of Lamp: ID of lamps could be 1 to 99.

Multifunction: ON/OFF, Dimming and Color-Temp adjusting setting ON/OFF, 2 scenes recall(auto dimming, night light).

Copy the ID of Remote Controller: Every remote controller has its ID number. One controller can copy and save the ID number of another controller to control the same lamps, and receive its unique ID number.

Operating method:

Steps of setting ID number of lamps:

1. Turn OFF the lamp to which ID number is set, then turn on lamp. Mark step 1. ID within 15 Seconds.

2. Press 1 or 2 numbers in the number key of remote controller, then press "COPY" key.

3. Dimmer and ID will be copied to remote controller, then the lamp will flash 3 times.

4. Turn off the lamp to which within 15 seconds, then flash setting.

Control the lamps:

The function of the keys on the picture on the right.

Control the single group: press the ID number of the lamp you want to control and then press the function key (power, color temp, brightness).

All control Mode press: "ALL" key to control all groups.

TABLE OF KEYS:

Press the ID number of the lamp you want to set, press "COPY" key.

OFF: Press the number key 1-99, press "OFF" (dimming OFF key) or "OFF" (single OFF key).

Dimming OFF key: Press the number key 1-99, press "OFF" (dimming OFF key) or "OFF" (single OFF key).

Cancel: Press "OFF" key, then "OFF" (dimming OFF key) or "OFF" (single OFF key) to cancel dimming mode.

COPY THE ID OF CONTROLLER:

Press "COPY" key of one controller and "ID" key of another controller or the same lamp, and 6 seconds, the indicator will flash 3 times, then flash setting.

Memory: Press the "MEMORY" key and "ID" key of the controller which the ID has been copied for 6 seconds, the indicator will flash 3 times.

NIGHT LIGHT MODE:

Press "NL" key when the lamp is turned off by the controller to enter the night light mode.

CIRCLE MODE:

Press the ID of the lamp, then press "C" key (left, right, up, down) to enter the circle mode.

SCENE MODE:

The system can save two scenes, "A" and "B".

Save:

1. Select the light you prefer.

2. Press the ID number of the lamp.

3. Press "A" or "B" key and then press "ON" or "OFF", the lamp will flash 1 time, then the scene will be saved.

Recall:

1. Press the ID number of the lamp.

2. Press "A" or "B" key, the lamp will enter the scene you preset.

