


MINI GC 25F-F

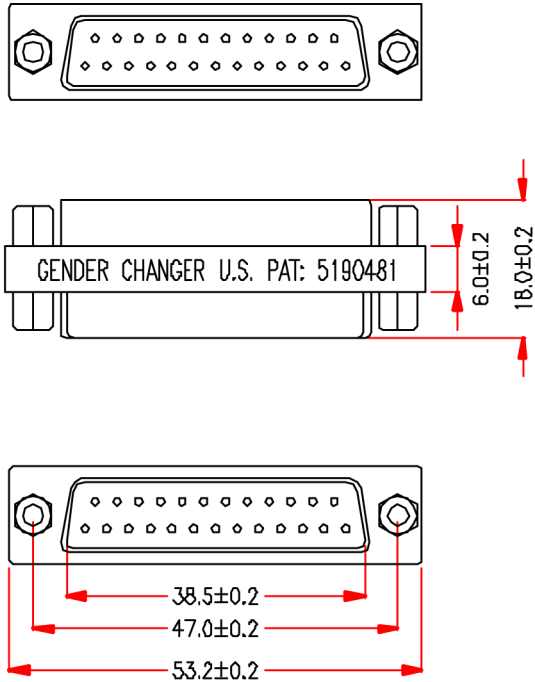

SPECIFICATION:

1. VOLTAGE RATING: 300V AG(rms).
2. CURRENT RATING: 5 AMP CONTINUOUS
3. DIELECTRIC STRENGTH 1000VAG
4. CONTACT RESISTANCE: 10 m Ohm min
5. INSULATION RESISTANCE: 5000 M Ohm min
6. DURABILITY: 30 CYCLEES FOR GOLD FLASH
7. CORROSION RESISATANCE: MEET M-STD-202F METHOD
101 CONITION BSALT WATER
SPRAY OR GOLD PLATED OVER 15u"
- 8.MATING FORCE INSERTION FORCE: OZ-16 OZ
AVERAGE 150 GRAM
EXTRACTION FORCE: 1KG MIN

*NOTE:All relevant materials are complied with RoHS directive

PART NO. 0029		Revision: _____		Cable Length Unless Other Spec. Tolerances: 0 ~0.2M ±0.01M 0.21~1.0M ±0.02M 1.1 ~1.5M ±0.025M 1.51~2.1M ±0.03M 2.1M ↑ ±0.04M
APPROVED				
CHECKED	JOAN			
DRAWING	SLOW	ITEM NO.	EB415	