



4-Zone Color Temperature Remote

Model No.: FUT094

1. Features

This product adopt world-wide used 2.4GHz frequency, GFSK control method, with the features of low power consumption, long distance transmitting, strong anti-interference and fast communication rate. can control specified Mi-Light / MiBoxer smart light with color temperature, brightness.

2. Product Parameters

Model No.: FUT094

Working Voltage: 3V(AAA * 2PCS)

Transmitting Power: 6dBm

Standby Power Consumption: 20 μ A


Working Temperature:-10~40°C

RF: 2.4GHz

Modulation Method: GFSK

Control Distance: 30m

3. Products Key Diagram

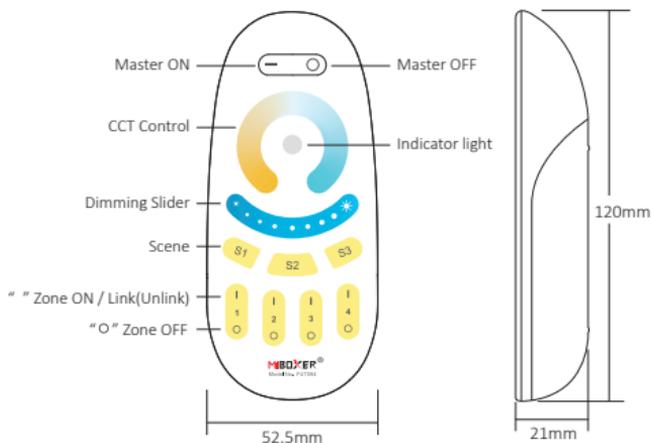

 Touch the color temperature ring to adjust the light color temperature.

 Slide the brightness slider to adjust light the brightness.

 Short press: control all paired lights;
Long press: dim top brightness for all lights.


 Short press: turn off all paired lights;
Long press: turn on "night light mode" for all lights.

S1~S3 Short press: activate scene Long press 3 seconds: Save the current color temperature and brightness of the fixture. (the light flashes one time slowly once completed successfully).

4. Linking Code / Unlinking Code Instructions

Attention: the light must be paired with remote control.

Linking Code Instructions



1

Switch off light, after 10 seconds then switch on again.

Link / Unlink
button



2

Short press " I " button 3 times within 3 seconds when light on.



3

Lights blink 3 times slowly means linking is done successfully.



Linking failed if light is not blinking slowly, Please follow above steps again.
(Note: Light that have linked can't link again)

Unlinking Code Instructions



1


Switch off light, after 10 seconds then switch on again.

Link / Unlink
button



2

Short press " I " button 5 times within 3 seconds when light on.



3


Lights blink 10 times quickly means unlinking is done successfully.



Unlinking failed if light is not blinking quickly, Please follow above steps again.
(Note: Light haven't linked that don't need to unlink)

5. Group control instruction

Pairing lights into different groups, dim and control light flexibly
Group control solution: Press "1" firstly and dim, example as below.

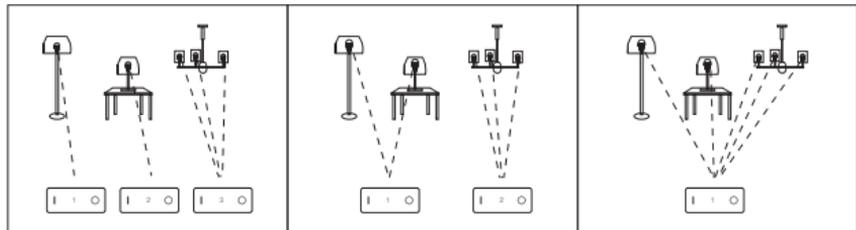

Attention:

1. Countless lights can be added into each zone.
2. One light only can be paired with one sub zone from anyone remote.

6. Attention

1. This remote only support Mi-Light /Miboxer 2.4G product series, kindly review light instruction to check compatibility.
2. In the using of the remote, if the indicated lamp blinking quickly, Please change the battery in time. Please don't use poor quality battery to avoid the leaking of battery liquid to damage the remote.
3. The remote is accurate electronics, don't use it in humid or high temperature area, remove battery and keep it in dry or free static electricity environment.
4. Please don't use the remote on the wide-range metal or strong electromagnetic wave area, otherwise, it will badly affect the controlling distance.



Made in China