


IP AUDIO Gateway

IS-381
IS-382
IS-3840




IS-3840 IP AUDIO Gateway(include amplifier)

IS-3840 Framework

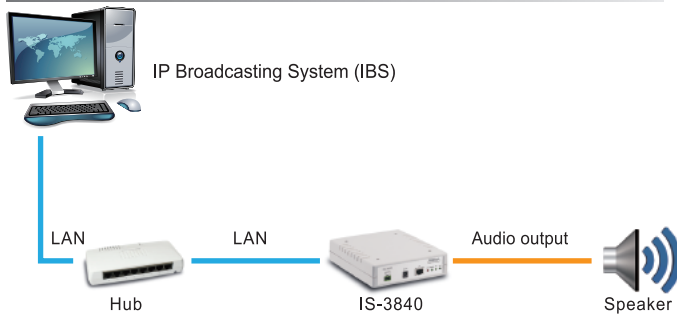

IS-381/IS-382: 1/2 Ports IP AUDIO Gateway

IS-381 / IS-382 Framework

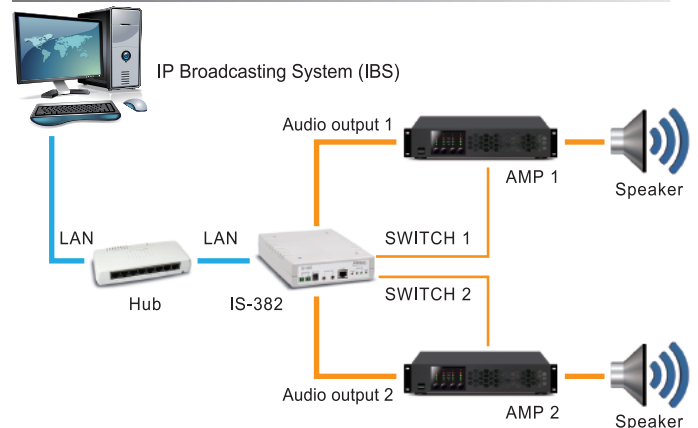

Functions

- Internet Audio Receiver with IP
- With RJ-45 port of standard 10/100Mbit Ethernet; It can make simple settings via browser with WEB interface.
- With fixed IP, DHCP and PPPoE, it can link to the internet.
- There are two independent sets of 3.5mm audio output ports that can connect independently to amplifier audio inputs (AUX IN) and convey the sound to speaker via amplifier.
- It can output the different scheduled broadcasting or voice broadcasting from the broadcasting system separately.
- Two independent sets of control output normally open (NO) can separately link amplifiers with external start functions.
- It supports the compression encoding format of the voice processing agreement G.711.
- It can simultaneously register 3 broadcasting system hosts

Specification

| Model No | IS-381 | IS-382 | IS-3840 |
|-----------------|--------------------------|--------------|-------------------------------|
| DIM (cm) | | 17x14.5x4 cm | |
| Weight (g) | 265g | 270g | 275g |
| Audio out | 1 port | 2 ports | 1 port |
| Audio interface | 3.5mm | | European-style terminal block |
| Power supply | 110V-240V | 12V/1A | 110V-240V 24V/4A |
| Protocol | SIP(RFC2543,RFC3261) | | |
| Codec | G.711 u-Law, G.711 a-Law | | |
| LAN connection | RJ45 10/100 Mbps | | |
| Warranty | 2 Years | | |