



Synergy 21 Tira LED Flex RGB DC24V/72W, positivo, 5m



SYNERGY 21

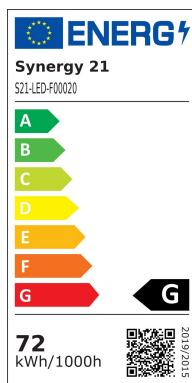

kwh/1000h:	72,00
Lúmenes:	2550
Vatio:	72,0
Vida útil nominal:	35000 Std.
Ciclos de conmutación:	50000
Temperatura ambiente óptima:	25 °C



Características técnicas:

- Alimentación: 24V/3A/72W
- Nº Led: 300x SMD 5050
- Flujo luminoso: Rojo: 120 lm / Verde: 240lm / Azul: 150lm
Dimensiones: 5000 x 14 x 6 mm
- Se puede cortar cada 6 SMD, o cada 100 mm,
- Color PCB: Blanco
- Polo positivo
- Interior


Atributos

Atributo	Valor
Abstrahlwinkel:	120
Ampere:	3
CC oder CV:	CV
Dimmbar:	abhängig vom Netzteil
EPREL_ANTI_GLARE_SHIELD:	false

Atributo	Valor
EPREL_BEAM_ANGLE:	Not applicable
EPREL_BEAM_ANGLE_CORRESPONDENCE:	SPHERE_360
EPREL_CAP_TYPE:	/
EPREL_CHROMATICITY_COORD_X:	0.000
EPREL_CHROMATICITY_COORD_Y:	0.000
EPREL_CLAIM_EQUIVALENT_POWER:	false
EPREL_COLOUR_TUNEABLE_LIGHT_SOURCE:	false
EPREL_CONNECTED_LIGHT_SOURCE:	false
EPREL_CORRELATED_COLOUR_TEMP_TYPE:	RANGE
EPREL_DIMENSION_DEPTH:	0
EPREL_DIMENSION_HEIGHT:	0
EPREL_DIMENSION_WIDTH:	0
EPREL_DIMMABLE:	NO
EPREL_DIRECTIONAL:	NDLS
EPREL_ENERGY_CONS_ON_MODE:	0
EPREL_ENVELOPE:	NO
EPREL_EQUIVALENT_POWER:	Not applicable
EPREL_HIGH_LUMINANCE_LIGHT_SOURCE:	false
EPREL_LIGHTING_TECHNOLOGY:	LED
EPREL_LUMEN_MAINTENANCE_FACTOR:	0.98
EPREL_LUMINOUS_FLUX:	0
EPREL_MAINS:	NMLS
EPREL_MAX_BEAM_ANGLE:	Not applicable
EPREL_MIN_BEAM_ANGLE:	Not applicable
EPREL_POWER_ON_MODE:	0.0
EPREL_POWER_STANDBY:	0.00
EPREL_REGISTRANT_NATURE:	MANUFACTURER
EPREL_SURVIVAL_FACTOR:	1.00
Länge:	5
LED Strip Klebeband:	ja
LED Strip Breite:	10

Atributo	Valor
LED Strip Höhe:	2.20
LED Strip Klebeband:	ja
LED Strip kürzbar:	167
LED Strip Länge:	5000
Lichtfarbe:	RGB
Lichtfarbe Name:	RGB
Schutzklasse:	IP20
Volt:	24
Peso:	0.15 Kg
Garantía:	24.00 Meses

Imágenes adicionales





Accesorios

Número de artículo	Denominación
81069	Synergy 21 Enchufe DC con borne de tornillo
81068	Synergy 21 Conector DC con borne de tornillo
81741	Synergy 21 Clip fijación de silicona para tiras LED, Pack de
125198	Mean Well LPV-150-24 Alimentación 24V/150W IP67
93682	Mean Well HLG-150H-24 Alimentación 24V/150W IP65 Regulable
174020	Synergy 21 Panel 620x620 50W V2, Blanco DUAL, Kit
183258	Shelly RGBW2 Relé Wi-Fi