

BPSE24V40ART2U/BPSE48V40ART2U
BPSE72V40ART2U

EXTENDED BATTERY MODULE TO PROLONG RUNTIME

The battery module ensures extended system runtime during power outages



Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The sealed lead-acid batteries used within the EBMs are stable and safe, which ensure the power system's reliable performance.

SERIES FEATURES

- Rack/Tower Convertible Configurations
- Sealed Lead-acid Batteries
- User-replaceable Batteries
- EBM Expansion Capability
- Metal Housing

PRODUCT CALLOUTS

1 . On-board Replaceable Fuse Cover
2 . Automatic Detection of Extended Battery Module Connector
3 . Input Connector
4 . Output Connector

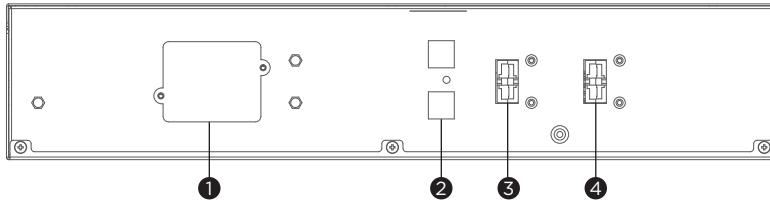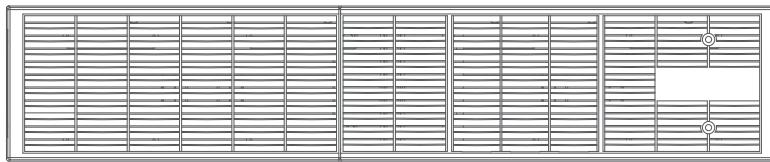

BPSE24V40ART2U/BPSE48V40ART2U/BPSE72V40ART2U



TECHNICAL SPECIFICATIONS

Model Name	BPSE24V40ART2U	BPSE48V40ART2U	BPSE72V40ART2U
General			
Nominal Output Voltage (Vdc)	24	48	72
Rated Output Current (A)		40	
Battery			
Battery Type		Sealed Lead-acid	
Built-in Charger		No	
Typical Recharge Time (Hours)		Depends on Connected UPS	
User-replaceable		Yes	
Expansion Ready		Yes	
Replacement Battery Pack	RBPO156	RBPO157	RBPO155
Replacement Battery Pack Quantity (pcs)		2	
Compatible UPS	OLS1000ERT2UA	OLS1500ERT2UA, OLS2000ERT2UA	OLS3000ERT2UA
Physical			
Form Factor		Rackmount, Tower	
Physical Size			
Dimensions (WxHxD) (mm.)		438 x 88 x 430	438 x 88 x 610
Weight (kg.)	16.24	26.74	38.75
Installed Rack Height (U)		2	
Environmental			
Operating Temperature (°C)		0 - 40	
Operating Relative Humidity (Non-condensing) (%)		0 - 90	
Certifications			
Certifications*		CE, EAC	
RoHS		Yes	

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.

#All specifications are subject to change without notice.

