


NOTE:
 1.The primary coating and secondary coating have the same coulor
 2.ROHS 2.0 and REACH Compliant

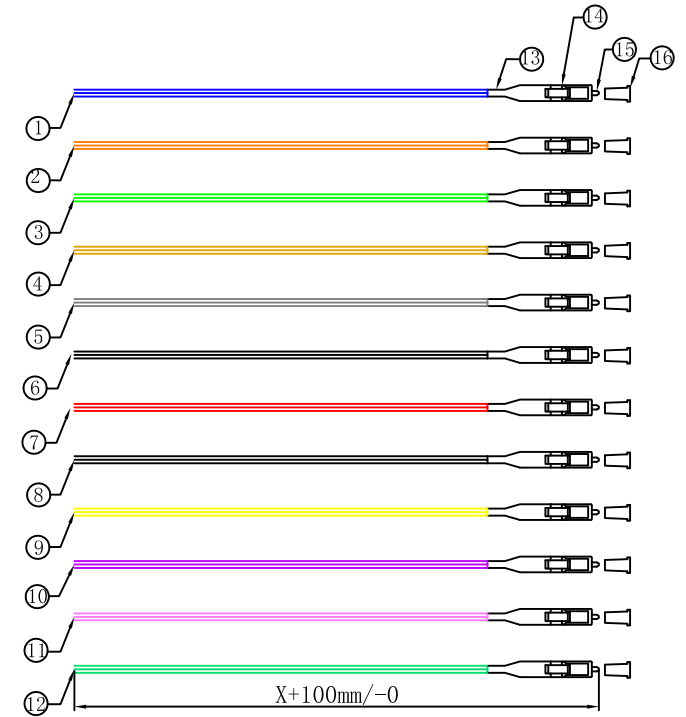

MATERIAL LIST:

⑩⑥	LC White Dust Cap		12	
⑩⑤	LC/ UPC MM Ferrule 126-128um		12	
⑩④	LC MM Beige 0.9 Connector		12	
⑩③	LC 0.9 White Boot		12	
⑩②	Fiber Cable LOOSE TUBE OM2 50/125 0.9mm TURQUOISE LSZH		Xm	
⑩①	Fiber Cable LOOSE TUBE OM2 50/125 0.9mm PINK LSZH		Xm	
⑩⑩	Fiber Cable LOOSE TUBE OM2 50/125 0.9mm VIOLET LSZH		Xm	
⑩⑨	Fiber Cable LOOSE TUBE OM2 50/125 0.9mm YELLOW LSZH		Xm	
⑩⑧	Fiber Cable LOOSE TUBE OM2 50/125 0.9mm BLACK LSZH		Xm	
⑩⑦	Fiber Cable LOOSE TUBE OM2 50/125 0.9mm RED LSZH		Xm	
⑩⑥	Fiber Cable LOOSE TUBE OM2 50/125 0.9mm WHITE LSZH		Xm	
⑩⑤	Fiber Cable LOOSE TUBE OM2 50/125 0.9mm GREY LSZH		Xm	
⑩④	Fiber Cable LOOSE TUBE OM2 50/125 0.9mm BROWN LSZH		Xm	
⑩③	Fiber Cable LOOSE TUBE OM2 50/125 0.9mm GREEN LSZH		Xm	
⑩②	Fiber Cable LOOSE TUBE OM2 50/125 0.9mm ORANGE LSZH		Xm	
⑩①	Fiber Cable LOOSE TUBE OM2 50/125 0.9mm BLUE LSZH		Xm	


Type	Multi-Mode
Insertion Loss	≤0.3dB
Return Loss	NA
Test Wavelength	850nm

NO.	SPECIFICATION STANDARD	QT' Y	REMARK	SYNERGY 21								
				CUSTOMER				ITEM NO.	See the chart			
				PRODUCT NAME	Pigtail LC/UPC OM2 50/125 μm 12 set coloured	manufacture country	CHINA	UNIT	MM			
			NEW	2017-4-24	A	DRAWNBY	CHECKBY	APPOBY	DATE			
BY	CHK	REVISION RECORD MODIFICATIONS			DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2017-4-24		

SYNERGY 21®														
TEST Protokoll														
Typ:SYNERGY	ITEM No.			Artikel NO.										
Produkt Beschreibung:														
Stueckzahl :1 Stk														
Einfuegedaempfung nach DIN 18600 Verfahren 7														
Wellenlaenge 850nm														
	Erlaubte	Verlust	blue	orange	green	brown	grey	white	red	black	yellow	violet	pink	turquoise
Steckerdaempfung	0.3 dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB
Return Loss (MM)														
Ergebnis	OK													
Datum:														
Achtung LWL Komponenten														
<ul style="list-style-type: none"> - Vorsichtig handhaben -Mindestbiegeradius von 40mm nicht unterschreiten -Stecken u. loesen der Verbindung nur durch 														
Handhabung am Steckergerhaeuse														
Nicht am Kabel ziehen!!!														
<ul style="list-style-type: none"> -Reklamationen in diesem Bereich koennen wir nicht anerkennen. -Ferrulen stets durch Staubschutzkap schuetzen und vor jedem Einsatz saeubern. 														

Chart:

NO.	ITEM NO.	LENGTH.	color	EAN Nummer	PACKING
1		0.5M			
2		1.0M			
3	S215476	2.0M		4038816064448	SYNERGY 21 BAG A
4		3.0M			
5		5.0M			
6		10.0M			
7		15.0M			

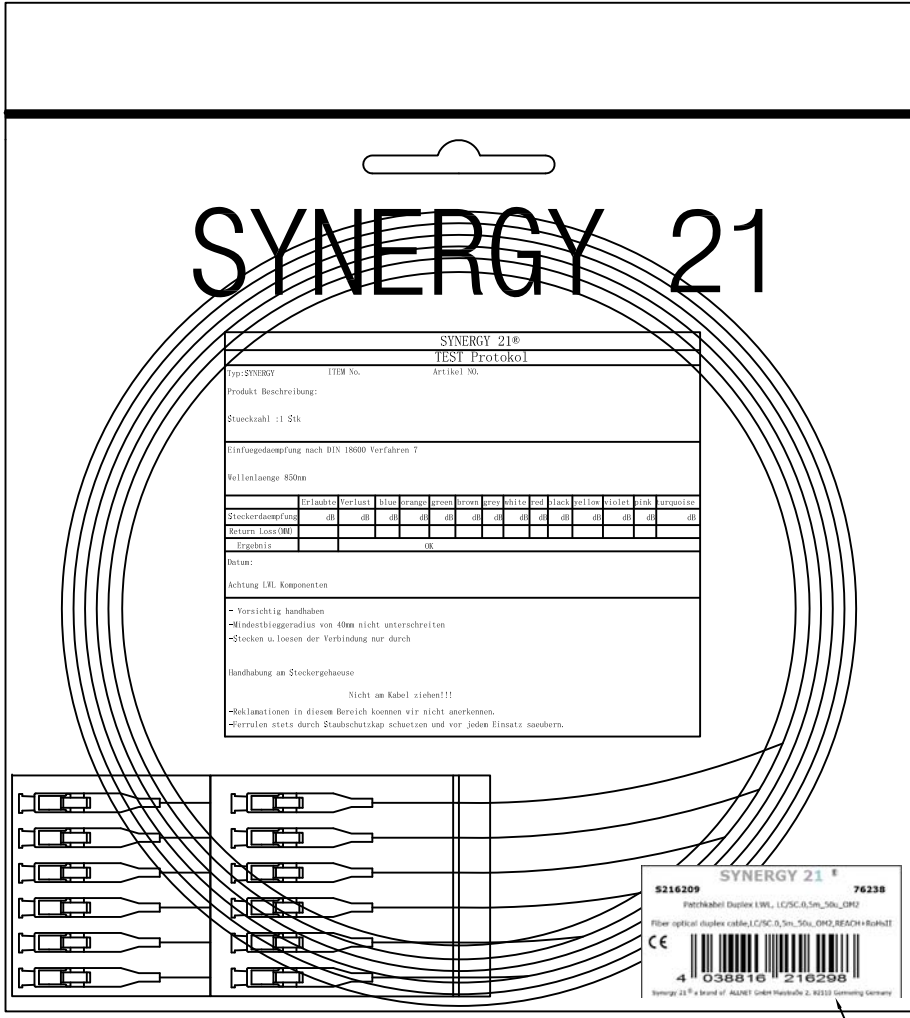

PACKING:SYNERGY 21 PE BAG + LABEL + TEST REPORT Example Label

SYNERGY 21										
CUSTOMER			ITEM NO.				See the chart			
PRODUCT NAME		Pigtail LC/UPC OM2 50/125 μm		manufacture country		CHINA	UNIT	MM		
DRAWNBY		CHECKBY		APPOBY		DATE				
BY	CHK	REVISION RECORD MODIFICATIONS			DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2017-4-24