



## ALLNET PCIe 2.5G X4 Dual Port 2.5 Gigabit Server Adapter- Copper RJ45 - ALL0144v2-2-2.5G-TX

>>> [Al artículo de la tienda](#)

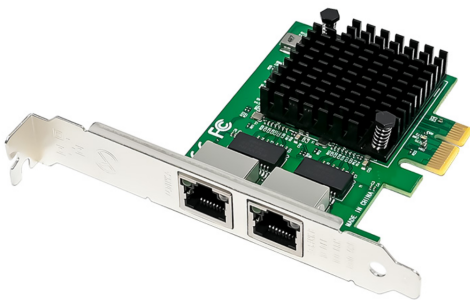

### EAN CODE



### Highlights:

- 2Port RJ45 2.5G Network card
- Intel I226 Chipset
- PCI-E x4 lane 5GT/s
- Dual Port RJ45 Cooper
- 10/100/1000/2.5GBASE-T (TX) Data-Rate
- Brackets: Full-Height and Low Profile Brackets included

### PCI Express Intel I226 multi-gigabit Ethernet adapter

Supporting mobile, desktop, workstation, value-server, or embedded space-constrained designs.

The Intel Ethernet Network Adapter I226-T2 is ideally suited for personal computers and workstations used for enterprise, gaming, and home networks. Based on the Intel Ethernet Controller I226, this versatile networking solution supports 2.5Gbps, 1Gbps, 100Mbps and 10Mbps network speeds without the need to overhaul existing cabling infrastructure. These systems require more bandwidth than ever before. The I226-T2 is also designed with a ventilated bracket, for increased efficiency and reduced power consumption. Packed with performance optimization capabilities, the I226-T2 includes advanced interrupt-handling features to reduce CPU overhead. Combining interrupt-handling features with intelligent filtering, ordering, and directing packets to specific queues and cores, enables load-balancing network traffic flows to improve throughput in multi-core platforms. Simplifying technology transitions with autonegotiation between port speeds provides maximum flexibility.

### Features



- Compliant with PCI Express specification Revision 3.1 (5GT/s)
- MDI (Copper) standard IEEE802.3 Ethernet interface up to 2.5Gb/s
- Complies with dual port 2.5GbE RJ45 port (copper)
- Complies with the MDI standard IEEE802.3 Ethernet interface for 2500BASE-T, 1000BASE-T, 100BASE-TX, 10BASE-TE application ( IEEE802.3bz, IEEE802.3ab ,IEEE802.3u and IEEE802.3 )
- IEEE802.3 Auto-negotiator
- IEEE802.3x and IEEE802.3z compliant flow control support with software-controllable RX thresholds and TX pause frames
- Automatic cross-over detection function (MDI/MDI-X)
- IEEE 1588 Protocol and 802.1AS implementation
- Supporting Time Sensitive Networking (TSN) Capabilities
- Support IEEE802.3az-Energy Efficient Ethernet (EEE)
- Full Wake-On-Lan support
- TCP/UDP, IPv4 checksum offloads (Rx/Tx)
- Transmit Segmentation offloading (TSO) (IPv4, IPv6)
- Support for packets up to 9.5KB Jumbo Frames

## Technical Details:

Essentials	
Product Collection	Intel 2.5GbE Network Adapter
Controller Processors	Intel I226
Bus Type / Bus Width	PCI Express 3.1, 5GT/s, x4 Lane
Connections	2 x RJ45 Copper
Data Rate	
Supported Speeds	2500 / 1000 / 100 / 10 Mbps
Cabling Type	Supports cable lengths up to 100 meters using CAT5e, CAT6 or CAT6A.
Bracket	Full-height bracket pre-installed. Low-profile bracket included.
Dimensions	83 x 67 mm (PCIe board)



## Technical Specifications

<b>Network Interfaces</b>	<p>Integrated MAC + BASE-T PHY</p> <p>MDI (Copper) IEEE 802.3 Ethernet interface</p> <p>Supports 2500BASE-T, 1000BASE-T, 100BASE-TX and 10BASE-T</p> <p>Compliant with IEEE 802.3, 802.3u, 802.3ab and 802.3bz</p>
<b>General Manageability</b>	<p>IEEE 802.3 Auto-Negotiation</p> <p>IEEE 802.3x / IEEE 802.3z Flow Control</p> <p>Software-controllable Rx thresholds and Tx pause frames</p> <p>4 Tx and 4 Rx queues per device</p> <p>IPv4 / IPv6 checksum offload</p> <p>TCP, UDP and SCTP checksum offload</p>
<b>Interrupt Levels</b>	INTA, MSI, MSI-X
<b>System Requirements</b>	
<b>Operating Systems</b>	<p>Windows 10 (64-bit)</p> <p>Windows 11 (64-bit)</p> <p>Windows Server 2019</p> <p>Windows Server 2022</p>
<b>Expansion Slot</b>	Available PCI Express x4, x8 or x16 slot
<b>Environment &amp; Certification</b>	
<b>Power Consumption</b>	Max. XX W
<b>Storage Humidity</b>	Up to 90% non-condensing at 35°C
<b>Storage Temperature</b>	-40°C to +70°C (-40°F to +158°F)
<b>Operating Temperature</b>	0°C to +55°C (32°F to +131°F)
<b>LED Indicators</b>	<p>LINK (solid) / ACTIVITY (blinking)</p> <p>Green = 2.5Gbps</p> <p>Yellow = 1Gbps</p> <p>Off = 100Mbps or 10Mbps</p>
<b>Certifications</b>	CE, FCC, RoHS