

ALLNET IP Kamera Fix Dome Outdoor / 5MP / IR / Vandalismus /

>>> [Vers l'article de la boutique en ligne](#)



EAN CODE



ALLNET IP Camera Fix Dome Outdoor / 5MP / IR / Vandalism / Low- Light / 79° / "ALL-CAM2488v3-LVEN"


Highlights:

- High quality image with 5MP, 1/2.7"CMOS sensor
- 5MP (2880*1620)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
- Ultra 265, H.265, H.264, MJPEG
- LightHunter technology ensures ultra-high image quality in low illumination environment
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Alarm:1 in/1 out, Audio: 1 in/1 out
- Smart IR, up to 30m (98ft) IR distance
- Supports 256 G Micro SD card
- IK10 vandal resistant
- IP67 protection
- Support PoE power supply

Key Features



Dimensions

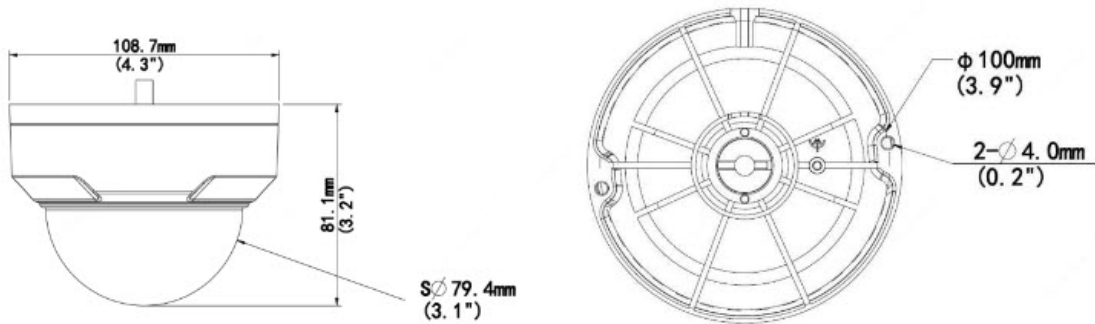

Technical Details:

| ALL-CAM2488v3-LVEN | | | | | |
|----------------------|-------------------------------------------------|------------|----------------|---------------|-------------------|
| Camera | | | | | |
| Sensor | 1/2.7", 5.0 megapixel, progressive scan, CMOS | | | | |
| Lens | 4.0mm@F1.6 | | | | |
| DORI Distance | Lens (mm) | Detect (m) | Observe (m) | Recognize (m) | Identify (m) |
| | 4.0 | 90.0 | 36.0 | 18.0 | 9.0 |
| Angle of View (H) | 78.7° | | | | |
| Angle of View (V) | 44.9° | | | | |
| Angle of View (O) | 89.2° | | | | |
| Adjustment angle | Pan: 3° ~ 360° | | Tilt: 0° ~ 68° | | Rotate: 3° ~ 360° |
| Shutter | Auto/Manual, 1 ~ 1/100000s | | | | |
| Minimum Illumination | Colour:0.003 Lux (F1.6, AGC ON) 0Lux with IR | | | | |
| Day/Night | IR-cut filter with auto switch (ICR) | | | | |



No. d'article: 207723
 Numéro de fabricant: ALL-CAM2488v3-LVEN

| | |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Digital Noise Reduction | 2D/3D DNR |
| S/N | >56dB |
| IR Range | Up to 30m (98ft) IR range |
| Wavelength | 850nm |
| IR On/Off Control | Auto/Manual |
| Defog | Digital Defog |
| WDR | 120dB |
| Video | |
| Video Compression | Ultra 265, H.265, H.264, MJPEG |
| H.264 code profile | Baseline profile, Main profile, High profile |
| Frame Rate | Main Stream:5MP (2880*1620), Max 30fps; 4MP (2560*1440), Max 30fps; 3MP (2304*1296), Max 30fps; 1080P (1920*1080), Max 30fps; Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps; Third Stream: D1 (720*576), Max 30fps; 640*360,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps; |
| Video Bit Rate | 128 Kbps~16 Mbps |
| OSD | Up to 8 OSDs |
| Privacy Mask | Up to 4 areas |
| ROI | Up to 8 areas |
| Motion Detection | Up to 4 areas |
| Image | |
| White Balance | Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2 |
| Digital Noise Reduction | 2D/3D DNR |
| Smart IR | Support |
| Flip | Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise |
| Dewarping | N/A |
| HLC | Supported |
| BLC | Supported |
| Audio | |
| Audio Compression | G.711 |
| Two-way audio | Supported |



No. d'article: 207723
 Numéro de fabricant: ALL-CAM2488v3-LVEN

| | |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Suppression | Supported |
| Sampling Rate | 8KHZ |
| Storage | |
| Edge Storage | Micro SD, up to 256GB |
| Network Storage | ANR |
| Network | |
| Protocols | IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS |
| Compatible Integration | ONVIF (Profile S, Profile G, Profile T), API |
| Client | EZStation EZView EZLive |
| Web Browser | Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below |
| | Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+, Safari 11+ |
| Interface | |
| Audio I/O | Input: impedance 35k Ω ; amplitude 2V [p-p] |
| | Output: impedance 600 Ω ; amplitude 2V [p-p] |
| Alarm I/O | 1/1 |
| Network | 1 RJ45 10M/100M Base-TX Ethernet |
| Certifications | |
| Certifications | CE: EN 60950-1 UL: UL60950-1 FCC: FCC Part 15 |
| General | |
| Power | DC 12V \pm 25%, PoE (IEEE 802.3af) |
| | Power consumption: Max 4.5W |
| Dimensions (\varnothing x H) | 108.7 x 81.1mm (\varnothing 4.3" x 3.2") |
| Net Weight | 0.425kg (0.93lb) |
| Material | Metal + Plastic |
| Working Environment | -30°C ~ 60°C (-22°F ~ 140°F), Humidity: 95% RH (non-condensing) |
| Storage Environment | -30°C ~ 60°C (-22°F ~ 140°F), Humidity: 95% RH (non-condensing) |
| Surge Protection | 2KV |
| Ingress | IP67 |



No. d'article: 207723
Numéro de fabricant: ALL-CAM2488v3-LVEN

| | |
|------------------|------|
| Protection | |
| Vandal Resistant | IK10 |
| Reset Button | N/A |

Accessoires

| No. d'article | Désignation |
|---------------|----------------------------------------------------------------------------------|
| 159707 | ALLNET ALL-CAM2488-LVEN zbh. Junction Box |
| 159708 | ALLNET IP Kamera zbh. Wallmount with Junctionbox/Wandmontag for ALL-CAM2488-LVEN |
| 99305 | ALLNET ALL95100 / TP Cat 6 Gigabit surge arrester |
| 186548 | ALLNET Injecteur PoE Gigabit PoE & PoE+ (15,4W/30W) |
| 112270 | ALLNET ALL048900V2 / Power over Ethernet Injector AT++ 90W |
| 113046 | ALLNET ALL048605PD / unmanaged 5 Port Gigabit PoE Switch |
| 99315 | ALLNET ALL8804PoE+ / unmanaged 8 port Gigabit Switch HPoE, 2 |
| 93392 | ALLNET ALL8808POE / 8 ports Gigabit Full PoE Switch |
| 193997 | ALLNET Switch full managed 8 port Gigabit 130W / 8x PoE+ / |
| 194025 | ALLNET Switch full managed 24 Port Gigabit 390W / 24x PoE+ |
| 200625 | ALLNET Videoserver NVR Box mit Networkoptix Server, RK3399, 2GB, ALL2288 |
| 124355 | Networkoptix IP Nx-Professional Videomanagement Software 1 Kanal "X86 Platform" |
| 162926 | Networkoptix IP Nx-Professional Videomanagement Software 4 Kanal "X86-Platform" |
| 162927 | Networkoptix IP Nx-Professional Videomanagement Software 8 Kanal "x86 Platform" |
| 146999 | ALLNET PoE USV Backup - USV für Kameras, Accesspoints ALL900 |

[Cliquez ici pour découvrir d'autres articles de cette catégorie dans notre boutique.](#)