



## Synergy 21 Tira LED Flex DC12V/24W, blanco frío, 5m

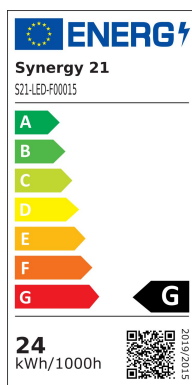

kwh/1000h:	24,00
Lúmenes:	1500
Vatio:	24,0
Vida útil nominal:	35000 Std.
Ciclos de conmutación:	50000
Temperatura ambiente óptima:	25 °C



### Características técnicas:

- Alimentación: DC12V/2A/24W  $\pm$  10%
- Temperatura termodinámica: 5900-6900K
- Número de LEDs: 300 SMD3528
- Flujo Luminoso: 1500lm
- Ángulo de enfoque: 120°
- PCB: Blanco
- Dimensiones: 5000 x 8 x 2,8mm

## Atributos

Atributo	Valor
Abstrahlwinkel:	120
Ampere:	2
CC oder CV:	CV
CRI:	>80
Dimmbar:	abhängig vom Netzteil
EPREL_ANTI_GLARE_SHIELD:	false

Atributo	Valor
EPREL_BEAM_ANGLE:	Not applicable
EPREL_BEAM_ANGLE_CORRESPONDENCE:	SPHERE_360
EPREL_CAP_TYPE:	/
EPREL_CHROMATICITY_COORD_X:	0.323
EPREL_CHROMATICITY_COORD_Y:	0.346
EPREL_CLAIM_EQUIVALENT_POWER:	false
EPREL_COLOUR_RENDERING_INDEX:	92.9
EPREL_COLOUR_TUNEABLE_LIGHT_SOURCE:	false
EPREL_CONNECTED_LIGHT_SOURCE:	false
EPREL_CORRELATED_COLOUR_TEMP_TYPE:	RANGE
EPREL_DIMENSION_DEPTH:	500
EPREL_DIMENSION_HEIGHT:	1
EPREL_DIMENSION_WIDTH:	8
EPREL_DIMMABLE:	NO
EPREL_DIRECTIONAL:	NDLS
EPREL_ENERGY_CLASS:	F
EPREL_ENERGY_CONS_ON_MODE:	2
EPREL_ENVELOPE:	NO
EPREL_EQUIVALENT_POWER:	Not applicable
EPREL_HIGH_LUMINANCE_LIGHT_SOURCE:	false
EPREL_LIGHTING_TECHNOLOGY:	LED
EPREL_LUMEN_MAINTENANCE_FACTOR:	0.98
EPREL_LUMINOUS_FLUX:	233
EPREL_MAINS:	NMLS
EPREL_MAX_BEAM_ANGLE:	Not applicable
EPREL_MAX_COLOUR_RENDERING_INDEX:	95
EPREL_MIN_BEAM_ANGLE:	Not applicable
EPREL_MIN_COLOUR_RENDERING_INDEX:	92
EPREL_POWER_ON_MODE:	3.7
EPREL_POWER_STANDBY:	0.00
EPREL_R9_COLOUR_RENDERING_INDEX:	78


Atributo	Valor
EPREL_REGISTRANT_NATURE:	MANUFACTURER
EPREL_SURVIVAL_FACTOR:	1.00
Länge:	5
LED Strip Klebeband:	ja
LED Strip Breite:	8
LED Strip Höhe:	3
LED Strip Klebeband:	ja
LED Strip kürzbar:	50
LED Strip Länge:	5000
Lichtfabe in Kelvin:	6500
Lichtfarbe:	kaltweiß
Lichtfarbe in Kelvin:	6500
Lichtfarbe Name:	kaltweiß
Lumen:	1500
Schutzklasse:	IP20
Volt:	12
Peso:	0.1 Kg
Garantía:	24.00 Meses

## Imágenes adicionales






V. Connect Drawing (1) :

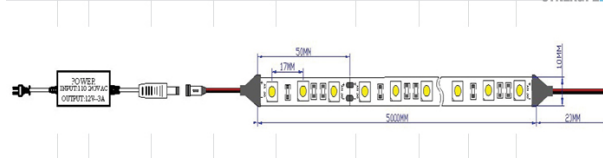

Connect Drawing (2) :

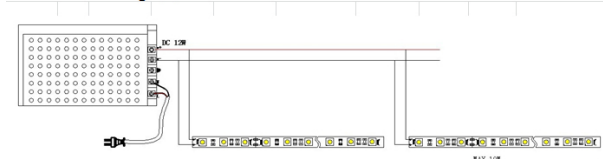

## Accesorios

Número de artículo	Denominación
81069	Synergy 21 Enchufe DC con borne de tornillo
81068	Synergy 21 Conector DC con borne de tornillo
81741	Synergy 21 Clip fijación de silicona para tiras LED, Pack de
125198	Mean Well LPV-150-24 Alimentación 24V/150W IP67
98273	Synergy 21 LED Flex Strip zub. Testklemmen für Single Color

Número de artículo	Denominación
174020	Synergy 21 Panel 620x620 50W V2, Blanco DUAL, Kit
174654	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 1 line clear
174653	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 1 line red
174656	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 2 line clear
174655	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 2 line red
174648	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 1 line clear
174650	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 1 line clear
174647	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 1 line red
174649	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 1 line red
174652	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 2 line clear
174651	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 2 line red
174640	Synergy 21 LED FLEX Strip zub. Easy Connect MINI Strip to Wire 8mm
174614	Synergy 21 LED FLEX Strip zub. Easy Connect Strip to strip Joint 8mm
174642	Synergy 21 LED FLEX Strip zub. Easy Connect Strip to strip Joint 8mm
174605	Synergy 21 LED FLEX Strip zub. Easy Connect Strip to Wire 8mm
122588	Osram Alimentación 24V 50W IP20
142258	Osram Alimentación DALI 24V/50W
180906	Mean Well LRS-50-24 Alimentación 24V/52W
181661	Mean Well WPD-06 Dimmer EnOcean wireless PWM