


Synergy 21 LED Retrofit GX5.3 4x1W amber/orange



SYNERGY 21

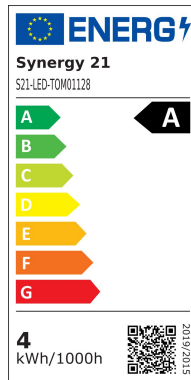

kwh/1000h:	4,00
Lumens:	350
Watt:	4,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C



Base: GX5.3
4x1Watt LEDs
ALU housing
Operating voltage 10-14V
Power consumption: 4 W
Lumem: not specified, as ambient lighting
Kelvin amber/orange
Beam angle 60°
Dimmable: yes
DxH: 50mm*60mm
Can be used as a replacement for conventional halogen mirror lamps.

Attention:

Please only use regulated or switching power supply units with the Synergy 21 LED GX5.3/MR16 spots. Do NOT use halogen transformers or wound power supply units, otherwise there is a risk of the LED being destroyed by overvoltage.

Please be sure to measure the voltage beforehand.

We recommend using the Synergy 21 Digital Multimeter DM830 to measure the voltage.

Please note that Synergy21 LED retrofit lamps may only be operated at an operating temperature between 0-50 C°.

The service life of the LEDs cannot be guaranteed in the event of deviations!

Attributes

Attribute	Value
Abstrahlwinkel:	60
CRI:	80
Dimmbar:	Ja
Sockel:	GX5,3
Weight:	0.1 Kg
Warranty:	60.00 Months

Accessories

Part No.	Name
85498	Synergy 21 LED adapter / socket for LED lamps GX5.3 and G4
107727	HEP Power Supply - 12V 12W - HEP for Flush Mount Box