


ALLNET Point-to-Point Coax 8 Port Master Chassis/Amplifier EOC 200 zbh. EOC G.hn module for chassis 100MHz "ALL-GHN108M-Coax-200"

>>> [Go to the shop article](#)

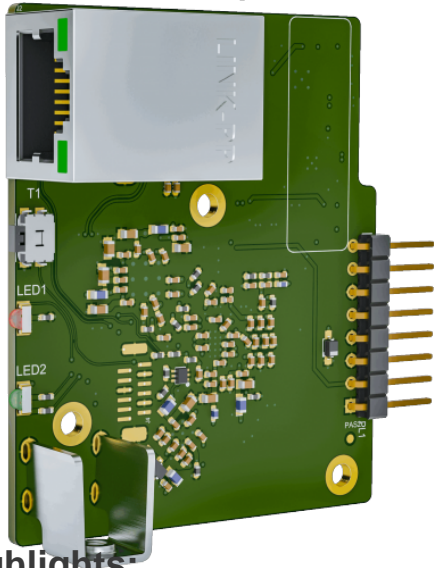

EAN CODE

Highlights:

- Frequency range: 2 - 199 MHz
- Network standard: G.hn
- Hardware encryption: AES 128-bit
- Quality of Service: VLAN/TOS/Packet Classifier/
- Gross data rate: 2000 Mbps max.
- Net data rate: 1700 Mbps max.
- incl. power supply for the optional EOC sockets 200MHz
- max. EOC sockets can be operated per module in the chassis

The G.hn module is used to extend an existing AMP ALL-GHN108-200 distribution amplifier in conjunction with EOC 200 flush-mounted boxes. Up to eight G.hn modules can be installed per distribution amplifier. Only G.hn modules of the same type (200MHz) can be installed per distribution amplifier.

The G.hn plug-in module enables an additional coaxial line to be integrated, which is available in the line with EOC 100MHz flush-mounted sockets for picking up network data and/or DVB-C signals. This is also known as DVB-C coexistence.

ATTENTION:

This is only the 200MHz g.hn module, the chassis/amplifier Art. 221624 is also required. see accessories