


PIN ASSIGNMENT:

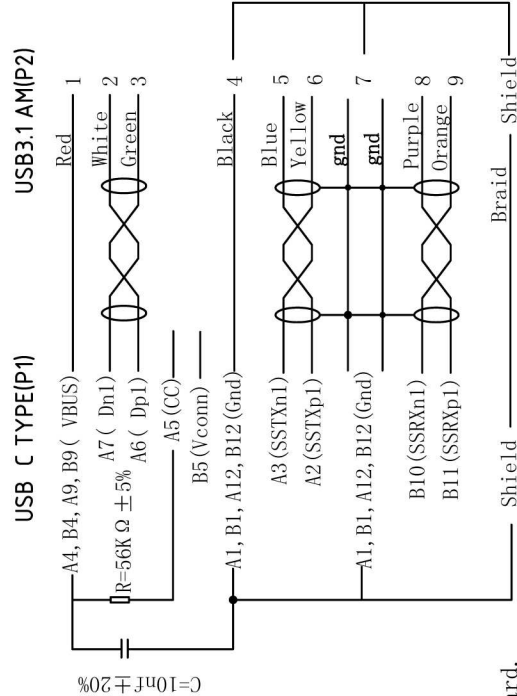

- NOTE:**
- Electrical test:
 - 100% open short & miss wire test;
 - Insulation resistance: DC 200V 10MΩ MIN;
 - Conductor resistance: 5Ω MAX
 - RoHS Compliant.
 - The transmission speed reaches the GEN2 5A/5G standard.

MATERIAL LIST:

⑤	OUTER MOLD	PVC 88A COLOR/BLACK	2	REMARK
④	INNER MOLD	LD-PE NATURE IN COLOR	2	
③	CONNECTOR 2	USB 3.0 AM PIN Gold-Platde Fu", Shell Ni-Plated;	1	
②	CONNECTOR 1	USB 3.1 C TYPE PIN Gold-Platde Fu", Shell Ni-Plated;	1	
①	CABLE	USB3.2 GEN2 32AWG (7/0.08TC*1P+E+AL+ML)*2+30AWG (7/0.10TC*2C)+22AWG (17/0.16TC*2C)+AB B=80/0.10TC E=7/0.08TC JACKET:PVC/BLACK OD:4.2±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QTY	REMARK

CUSTOMER S ITEM	K5282-3ASW.X	CUSTOMER	EFB
DRAWING	TITLE	USB3.2 GEN2 CM - AM	
UNIT	mm	SCALE	REV A/0
DRAWN BY	Zhouqinghua	CHECK BY	APPRO BY
			DATE 2020/2/17

