


NOTE:

- 1.The primary coating and secondary coating have the same coulor
- 2.Loose buffered,easy strip type at least 1m
- 3.ROHS 2.0 and REACH compliant

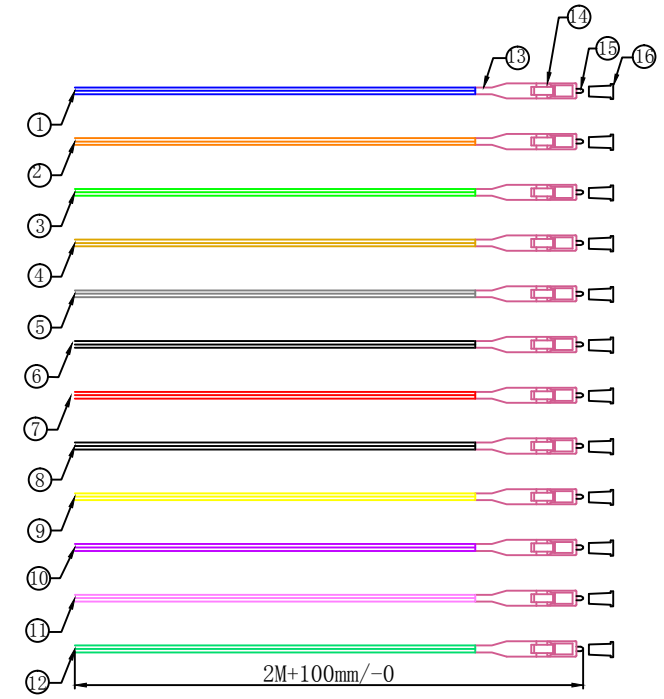

MATERIAL LIST:

⑫	LC White Dust Cap	12	
⑮	LC/ UPC MM Ferrule	12	
⑭	LC MM Erika Violet 0.9 Connector	12	
⑬	LC 0.9 Erika Violet Boot	12	
⑫	Fiber Cable LOOSE TUBE OM4 50/125 0.9mm TURQUOISE LSZH	2m	
⑪	Fiber Cable LOOSE TUBE OM4 50/125 0.9mm PINK LSZH	2m	
⑩	Fiber Cable LOOSE TUBE OM4 50/125 0.9mm VIOLET LSZH	2m	
⑨	Fiber Cable LOOSE TUBE OM4 50/125 0.9mm YELLOW LSZH	2m	
⑧	Fiber Cable LOOSE TUBE OM4 50/125 0.9mm BLACK LSZH	2m	
⑦	Fiber Cable LOOSE TUBE OM4 50/125 0.9mm RED LSZH	2m	
⑥	Fiber Cable LOOSE TUBE OM4 50/125 0.9mm WHITE LSZH	2m	
⑤	Fiber Cable LOOSE TUBE OM4 50/125 0.9mm GREY LSZH	2m	
④	Fiber Cable LOOSE TUBE OM4 50/125 0.9mm BROWN LSZH	2m	
③	Fiber Cable LOOSE TUBE OM4 50/125 0.9mm GREEN LSZH	2m	
②	Fiber Cable LOOSE TUBE OM4 50/125 0.9mm ORANGE LSZH	2m	
①	Fiber Cable LOOSE TUBE OM4 50/125 0.9mm BLUE LSZH	2m	


Type	Multi-Mode
Insertion Loss	≤0.3dB (IEC 61300-3-4)
Return Loss	NA
Test Wavelength	850nm
Group Refractive Index	1.482 @850nm 1.477 @1300nm

NO.	SPECIFICATION STANDARD	QT' Y	REMARK	SYNERGY 21						
	Add refractive index and Artikel NO	2019-2-11	A2	CUSTOMER			ITEM NO.	S215478V2		
	White Boot,Beige Connector→Erika Violet Boot and Connector	2017-9-6	A1	PRODUCT NAME	Pigtail LC/UPC OM4 50/125 μm manufacture country		12 set coloured	CHINA	UNIT	MM
	NEW	2017-4-24	A	DRAWNBY	CHECKBY	APPOBY	DATE			
BY	CHK	REVISION RECORD MODIFICATIONS		DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2017-4-24	

SYNERGY 21®														
TEST Protokol														
Typ:SYNERGY	ITEM No.	Artikel NO.												
Produkt Beschreibung:														
Stueckzahl :1 Stk														
Einfuegedaempfung nach DIN 18600 Verfahren 7														
Wellenlaenge 850nm														
	Erlaubte	Verlust	blue	orange	green	brown	grey	white	red	black	yellow	violet	pink	turquoise
Steckerdaempfung	0.3 dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB
Return Loss (MM)														
Ergebnis	OK													
Datum:														
Achtung LWL Komponenten														
- Vorsichtig handhaben -Mindestbiegeradius von 40mm nicht unterschreiten -Stecken u. loesen der Verbindung nur durch														
Handhabung am Steckergehause														
Nicht am Kabel ziehen!!!														
-Reklamationen in diesem Bereich koennen wir nicht anerkennen. -Ferrulen stets durch Staubschutzkap schuetzen und vor jedem Einsatz saeubern.														

Chart:

ITEM NO.	LENGTH.	Artikel NO.	EAN Nummer	PACKING
S215478V2	2.0M	147228	4038816068477	SYNERGY 21 BAG A

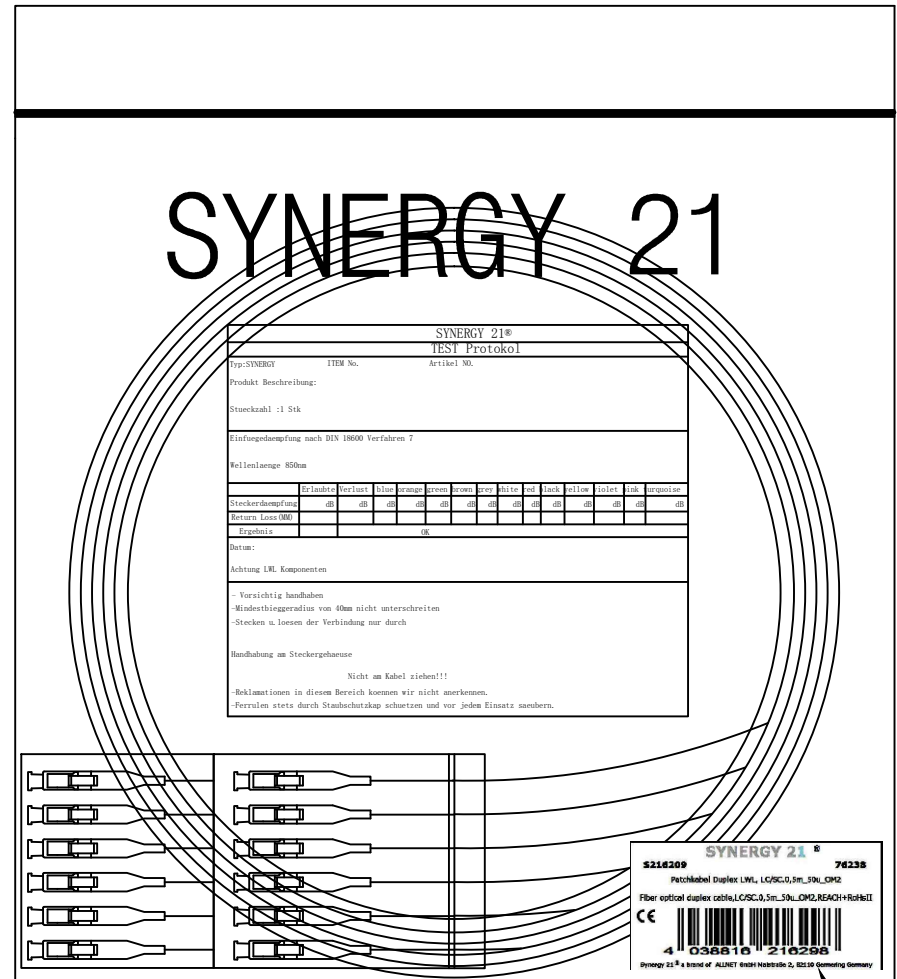

PACKING: PE BAG + LABEL + TEST REPORT

Example Label

SYNERGY 21											
		Add refractive index and Artikel NO				2019-2-11	A2	CUSTOMER		ITEM NO.	S215478V2
		White Boot,Beige Connector→Erika Violet Boot and Connector				2017-9-6	A1	PRODUCT NAME	Pigtail LC/UPC OM4 50/125 µm 12 set coloured	manufacture country	CHINA UNIT MM
		NEW				2017-4-24	A	DRAWNBY	CHECKBY	APPOBY	DATE
BY	CHK	REVISION RECORD MODIFICATIONS				DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2017-4-24