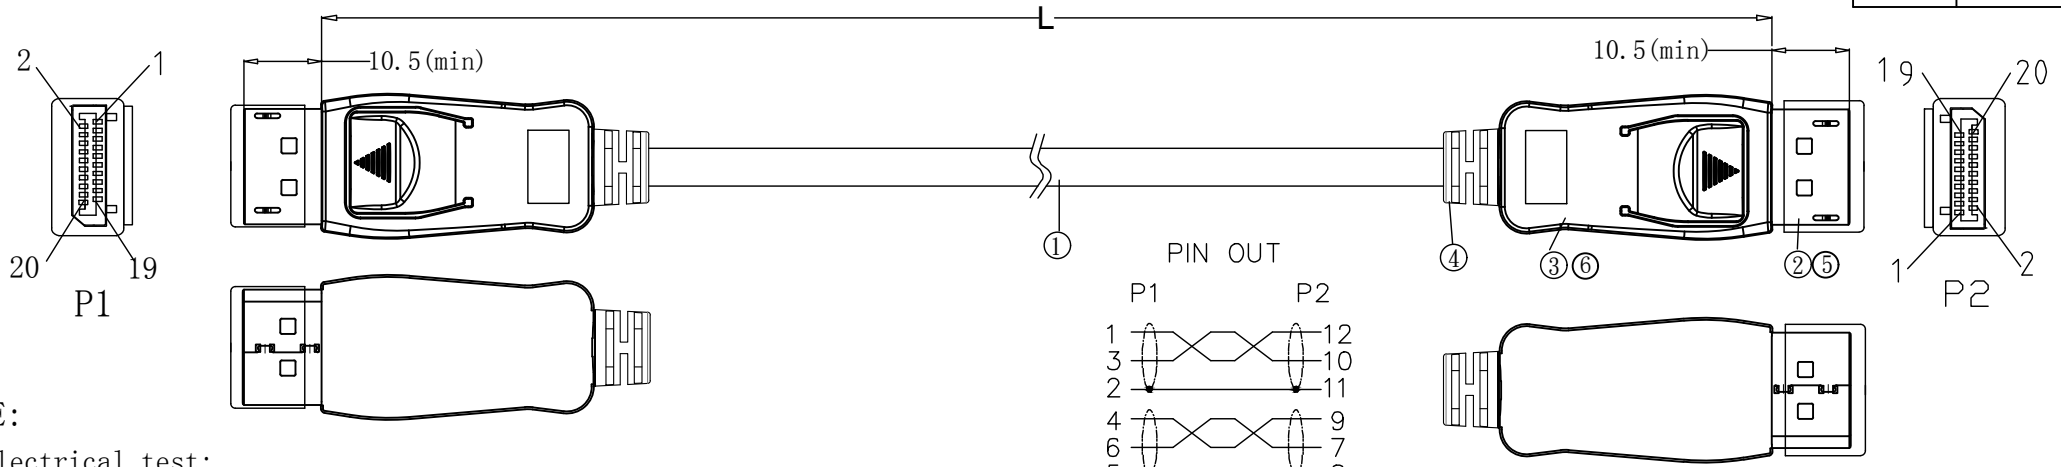

PIN OUT

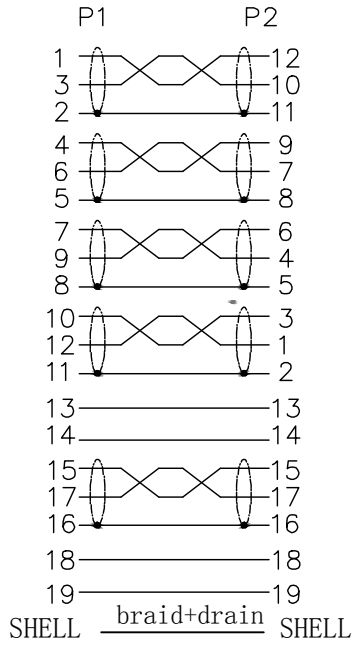

NOTE:

1. Electrical test:
   (1). 100% open short & miss wire test;
   (2). Insulation resistance:DC 300V 0.01s 10M ohm min;
   (3). Contact resistance:3 ohm max;
   (4). Bandwidth:40Gbps max
2. Computer + Monitor test
   (1). Resolution:3840*2160@120Hz
3. Marking:DisplayPort Cable E****** AWM STYLE 20276 80℃ 30V VW-1
   --- 10K/8K DisplayPort 2.0 UHBR 10
4. RoHS(EU2015/863) and REACH Compliant
5. Operating Temperature:0℃~45℃
6. Storage Temperature:-20℃~ 70℃
7. Operation humidity:10%~85%
8. Storage humidity:10%~85%
9. PACKING:1PC/SYNERGY 21 A bag+label; SubPack: 10pcs/PE bag+label; Carton +labelx2;

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
⑤	DUST CAP	LD PE	2	
④	TUBE END	BLACK PVC 45P	2	
③	OUTER COVER	BLACK ABS ASSEMBLY TYPE	2	
②	CONNECTOR	DP 20P/M WTIH LATCHING Blue INSULATION,THE PIN GOLD PLATED ,THE SHELL FOR GOLD PLATED	2	
①	CABEL	DP2.0V CABLE[(30AWG BC)*1P+D+FAM]*5+(30AWG BC)*4C+AL-FOIL+(30AWG BC)+BRAID,JACKET:PVC black OD:6.0±0.2mm	1	

ITEM NO	LENGTH
S215437V5	500±30MM
S215438V5	1000±30MM
S215439V5	1500±30MM
S215440V5	2000±50MM

					SYNERGY 21				
					CUSTOMER		ITEM NO.	SEE THE CHART	
					PRODUCT NAME	30AWG DisplayPort 2.0 UHBR10 Male-Male Black Cable Gold plating	manufacture country:	CHINA	UNIT MM
		NEW	2021-08-27	A	DRAWNBY	CHECKBY	APPOBY	DATE	
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2021-08-27	