

Q3 2026

Comparison tables

Key differences of Axis offerings



CONTENTS

ANALYTICS	4
SOLUTIONS BY TECHNOLOGY	6
PRODUCT QUALITY SUSTAINABILITY AND CYBERSECURITY	7
NETWORK CAMERAS	
Box cameras	8
Bullet cameras	14
Modular cameras	16
Dome cameras	19
Panoramic cameras	25
Pan/tilt/zoom cameras	28
Thermal cameras	33
Explosion-protected devices	34
Canon network cameras	36
RADAR DEVICES	37
SYSTEM DEVICES	38
MANAGEMENT SOFTWARE	40
VIDEO RECORDERS	42
WORKSTATIONS, ADD. SERVICES, EDGE STORAGE	44
ACCESSORIES	45
BODY WORN	46
NETWORK AUDIO	47
ACCESS CONTROL	51
NETWORK INTERCOMS	53
2N - AN AXIS COMPANY*	55

*This chart reflects 2N products sold by Axis Communications in Americas and APAC.
Axis Communications distributes and supports 2N products and solutions in the Americas and
Asia Pacific (please check the product availability with the Axis team for the Asia Pacific region).

Axis warranty - 5-year warranty for peace of mind

- ◆ 5-year product warranty
- ◆ Trouble-free ownership
- ◆ Better control of overall costs
- ◆ Enhanced RMA support
- ◆ First-class quality and support

Axis 5-year warranty covers most of our product portfolio (see datasheet for exceptions).



For more information, see:
[Warranty](#)

AXIS OS software support

- ◆ Future proofs your Axis device
- ◆ Approximately 8-12 years of support, depending on product*
- ◆ Choose between active track, long-term support (LTS) track and in some cases also product-specific support (PSS) track



For more information, see:
[AXIS OS Portal](#)

Axis tools - help at every stage

Axis offers a range of powerful tools that help you to save time and be more efficient at every stage of your project. From finding the right products and planning your sites, to installing and managing your systems.



For more information, see:
[Tools](#)

Product selector - find and compare

Go to the Axis product selector to find and compare our products, and choose the ones most suitable for your needs.



For more information, see:
[Product selector](#)

Axis Communications Academy

Learn. Know. Grow.

Axis Communications Academy's industry-recognized training gives you deep knowledge about the latest solutions, technology, and trends delivered by the industry experts.




For more information, see:
[Axis Communications Academy](#)

*See the product webpages for exact end of software support date.




Product naming structure - Guide

This guide explains Axis product naming structure in a comprehensive manner and gives useful information on the product and product features. For more information, see: [Product naming structure guide](#)

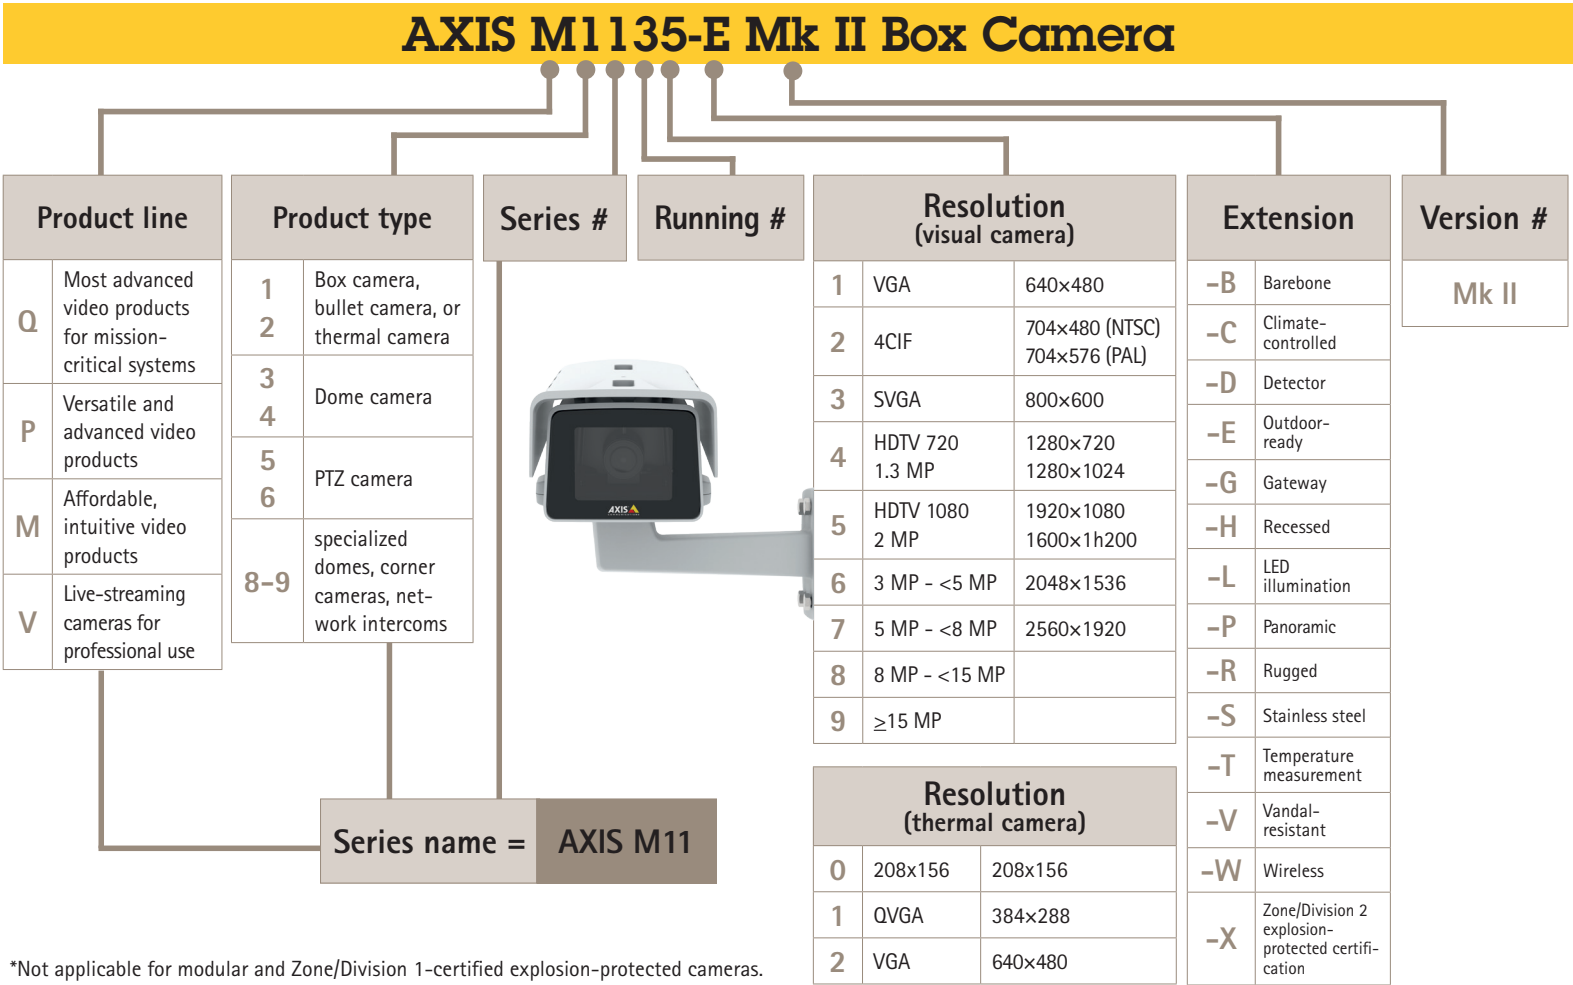

*Not applicable for modular and Zone/Division 1-certified explosion-protected cameras.

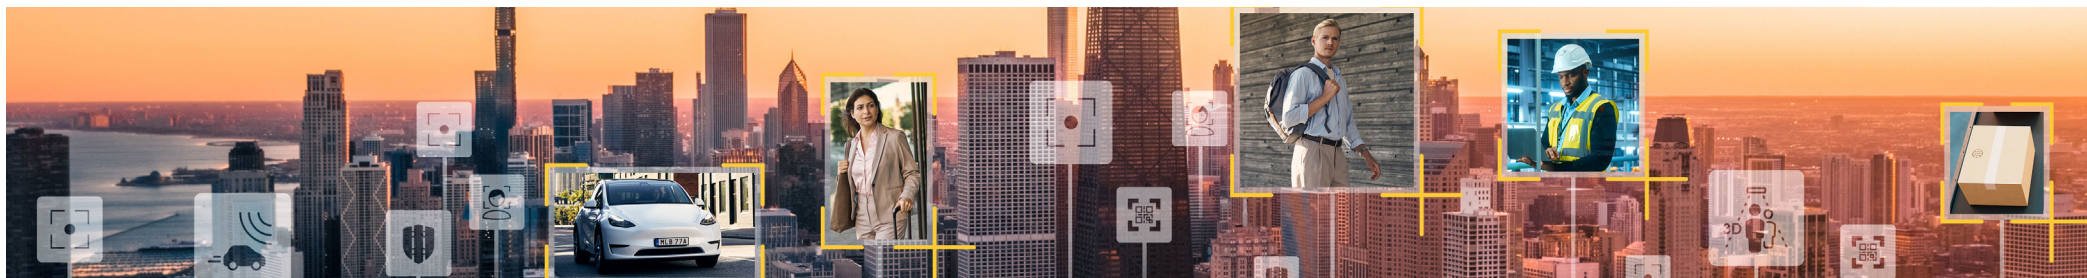

Intuitive. Insightful. Open.

Easy access to actionable insights

Axis edge analytics provide easy access to actionable insights, helping you respond faster, find what matters, and improve operational efficiency. Powered by Axis Scene Intelligence, they deliver reliable results you can trust.



AXIS Object Analytics

AXIS Object Analytics offers core capabilities for humans and vehicles, including:

- > Detection
- > Classification
- > Tracking
- > Counting

Gain operational insights through intuitive dashboards with [AXIS Data Insights](#) in Axis Cloud Connect.



AXIS Scene Metadata



AXIS Perimeter Defender



AXIS Speed Monitor



AXIS License Plate Verifier



AXIS Radar Data Visualizer



AXIS Audio Analytics




AXIS Face Detector



AXIS Live Privacy Shield



AXIS Image Health Analytics



AXIS Video Motion Detection

Analytics

Turning data into lasting value

Axis user-friendly analytics help you automate actions, run your business smarter, and gain insights to protect, improve, and optimize.

Boost performance with AI at the edge

Gain real-time insights to enable instant action

Search and analyze video and audio quickly and easily

Detect patterns for smarter, proactive decisions

Flexibly integrate with applications and systems

AXIS Camera Application Platform

5



Add value with a wide range of compatible applications from our partners

AXIS Camera Application Platform (ACAP), launched 2009, is an open application platform from Axis. It provides a development platform for software-based solutions and systems built around Axis devices. ACAP is supported by most Axis devices such as cameras, speakers and intercoms, and opens the door to a broad selection of security, safety, and operational efficiency applications running on the edge.



For more information, please go to:
[AXIS Camera Application Platform \(ACAP\)](#)

ONVIF®

Axis products support one or several of the following ONVIF profiles:

- > Profile A – For access control configuration
- > Profile C – For door control and event management
- > Profile G – For edge storage and retrieval
- > Profile M – For metadata and events for analytics applications
- > Profile S – For basic video streaming
- > Profile T – For advanced video streaming



For more information on ONVIF, please go to: www.axis.com/onvif

Innovation that makes a difference

Our cutting-edge technologies protect people and businesses under all kinds of circumstances. From extreme weather to challenging light conditions, you can always depend on Axis for innovative surveillance solutions that meet your needs.



Solutions by technology



AV1 codec

A modern video encoding standard, optimized for video transmission over the internet.



Cloud Connect

An open hybrid cloud platform that enables managed services.



AXIS OS

AXIS OS is the Linux-based operating system used in most of your Axis network devices.



System-on-chip

Designed or selected by Axis for optimal cybersecurity and solutions.



Edge Vault

Hardware-based cybersecurity platform that safeguards your device



Scene Intelligence

A superior foundation for video analytics performance.



Zipstream

Minimize bandwidth and storage without sacrificing valuable information.



Lightfinder

Capture color images in low-light conditions, with excellent image quality and minimum motion blur.



Forensic WDR

For maximum forensic value and usability in scenes with both very bright and very dark areas.




OptimizedIR

See in complete darkness thanks to advanced and powerful camera-integrated solutions.




Image stabilization

Effectively minimize the impact of vibration and shaking to ensure reliable video.

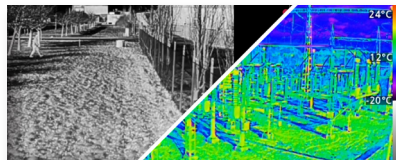

Thermal imaging

For temperature monitoring and heat-based detection - regardless of visibility.

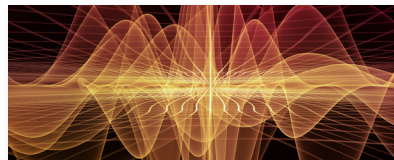

Radar

For wide-area detection and traffic monitoring regardless of visibility 24/7.



From analog to IP

Make the move at your own pace and benefit from the endless possibilities of a network solution.

Product quality




More than tough

Axis products are designed for reliability. We care as much about our products giving you what you need, as we do about making them robust and resilient.

We build total quality into Axis products and solutions through our meticulous attention to detail. It begins in the development of our products and continues throughout the production, configuration and testing of every product.

More information available at: www.axis.com/about-axis/quality

Sustainability

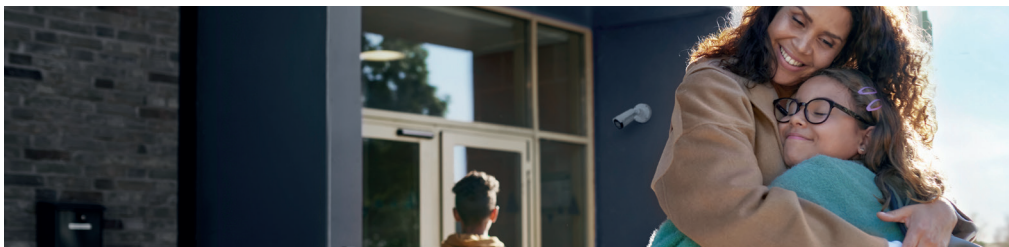

Responsibility along the entire value chain

Axis is increasing the use of renewable carbon-based plastics including recycled, bio-based, and carbon capture-based plastics in its products. Learn more how we calculate renewable carbon-based plastic content [here](#).

We apply sustainability principles across the value chain, taking into account environmental impact, people and society, and business practices.

Axis became a signatory of the UN Global Compact in 2007 and supports the UN's Sustainable Development Goals (SDGs).

Axis stays ahead of legislation by phasing out hazardous substances such as BFR/CFR/PVC.

More information available at: www.axis.com/about-axis/sustainability

Cybersecurity

7



Securing better cyber protection together

Axis helps you to safeguard your system and reduce the risk of cyberattacks with technologies, tools, services and guidance. We highlight some of the support we provide below.

Axis Edge Vault hardware-based cybersecurity platform

This hardware-based platform provides a solid foundation to ensure your Axis device is a trusted and reliable part of your network. Axis Edge Vault supports a wide range of use cases including supply chain protection, secure onboarding, secure key storage, and video tampering detection. For more details, visit www.axis.com/solutions/edge-vault

Device software

Keeping your device updated is essential in a robust approach to cybersecurity. Our operating system, AXIS OS, gives you the choice to upgrade devices based on two types of tracks. The long-term support (LTS) track is focused on improving cybersecurity and stability, while the active track provides new features in addition to improving cybersecurity and stability. Read more at: www.axis.com/solutions/axis-os

Device management software

The software below help you to efficiently configure and manage Axis devices, including batch processing of security tasks, such as deploying certificates and upgrading device software.

[AXIS Device Manager](#) provides efficient device management for on-site operations

[AXIS Device Manager Edge](#) offers easy device management from anywhere

[AXIS Device Manager Extend](#) enables scalable device management from anywhere

For more information, including guidance on cybersecurity best practices, as well as security advisories, visit the [cybersecurity portal](#)

Box cameras

	AXIS Q17 Series				
	AXIS Q1728-LE 	AXIS Q1728 	AXIS Q1726-LE 	AXIS Q1726 	AXIS Q1715 
Max. video resolution	3840x2160 (8.3 MP)	3840x2160 (8.3 MP)	2688x1512 (4 MP)	2688x1512 (4 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	13 mm: 1/1.2", 5.9 – 13.3 mm F1.6 – 2.9, 108° – 49° 48 mm: 1/1.2", 15.2 – 48.7 mm F1.7, 42° – 13°	13 mm: 1/1.2", 5.9 – 13.3 mm F1.6 – 2.9, 108° – 49° 48 mm: 1/1.2", 15.2 – 48.7 mm F1.7, 42° – 13°	1/1.8", 4.7 – 10 mm F1.1 – 1.2, 101.8° – 44°	1/1.8", 4.7 – 10 mm F1.1 – 1.2, 101.8° – 44°	1/2.8" 4 – 84.6 mm, F1.6 – F4.5 76° – 3.6°
Min. illumination (lux) Color/B&W	13 mm: 0.05/0.00 48 mm: 0.05/0.00	13 mm: 0.05/0.01 48 mm: 0.05/0.01	0.01/0.00	0.01/0.002	0.1/0.02
Max. frames per second	50/60	50/60	100/120	100/120	50/60 100/120 without WDR
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -
Compute capabilities	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics Active tampering alarm AXIS Scene Metadata
Power	PoE Class 4, DC	PoE Class 3, DC	PoE Class 4, DC	PoE Class 3, DC	PoE Class 3/4, DC
In-/output ports	4	4	4	4	4
Operating temperature	-40 °C to 60 °C (-40 °F to 140 °F)	-10 °C to 60 °C (14 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-10 °C to 60 °C (14 °F to 140 °F)	-20 °C to 50 °C (-4 °F to 122 °F)
Approvals	IP66/NEMA 4X, IK10, IP67	-	IP66/NEMA 4X, IK10, IP67	-	-
WDR/Lightfinder	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / -
Optimized IR/Built-in IR	✓ / ✓	- / -	✓ / ✓	- / -	- / -
Secure Boot/Signed video/Secure keystore	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-2 Level 2
Sustainability	PVC free, BFR/CFR free 42% bio-plastics 4% recycled plastics	PVC free, BFR/CFR free 13 mm: 35% recycled plastics 48 mm: 42% recycled plastics	PVC free, BFR/CFR free 42% bio-plastics 3% recycled plastics	PVC free, BFR/CFR free 28% bio-plastics 15% recycled plastics	PVC free, BFR/CFR free
Highlighted features	Edge-to-edge technology Shock detection Built-in wiper Electronic image stabilization	Edge-to-edge technology Shock detection, HDMI Built-in wiper Electronic image stabilization	Edge-to-edge technology Shock detection Built-in wiper Electronic image stabilization	Edge-to-edge technology Shock detection, HDMI Electronic image stabilization	Edge-to-edge technology Shock detection HDMI, HD-SDI, i2C Electronic image stabilization

Box cameras

	AXIS Q16 Series						
	AXIS Q1686-DLE 	AXIS Q1656-DLE 	AXIS Q1656 	AXIS Q1656-B 	AXIS Q1656-LE 	AXIS Q1656-BLE 	AXIS Q1656-BE 
Max. video resolution	2688x1512 (4 MP)	2688x1512 (4 MP)	2688x1512 (4 MP)	2688x1512 (4 MP)	2688x1512 (4 MP)	2688x1512 (4 MP)	2688x1512 (4 MP)
Sensor size/Lens/ Horizontal field of view	1/1.8", i-CS lens Varifocal, 9 - 50 mm, F1.5 46° - 9°	1/1.8", i-CS lens 3.9 - 10 mm, F1.5 96° - 44°	1/1.8", i-CS lens 3.9 - 10 mm, F1.5 120° - 47°	1/1.8", -, -	1/1.8", i-CS lens 3.9 - 10 mm, F1.5 113° - 47°	1/1.8", -, -	1/1.8", -, -
Min. illumination (lux) Color/B&W	0.05/0.00	0.05/0.00	0.05/0.01	- / -	0.05/0.00	- / -	- / -
Max. frames per second	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / ✓	✓ / ✓	✓ / -	✓ / -	✓ / -
Compute capabilities	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics Audio detection AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata
Power	PoE Class 4, DC	PoE Class 4, DC	PoE Class 3, DC	PoE Class 3, DC	PoE Class 4, DC	PoE Class 4, DC	PoE Class 4, DC
In-/output ports	4	4	4	4	4	4	4
Operating temperature	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-20 °C to 60 °C (-4 °F to 140 °F)	-20 °C to 60 °C (-4 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)
Approvals	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	-	-	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X
WDR/Lightfinder	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -
Optimized IR/Built-in IR	✓ / ✓	✓ / ✓	- / -	- / -	✓ / ✓	✓ / ✓	- / -
Secure Boot/Signed video/Secure keystore	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2
Sustainability	PVC free, BFR/CFR free 5% bio-plastics	PVC free, BFR/CFR free 6% bio-plastics	PVC free, BFR/CFR free 4% bio-plastics	PVC free, BFR/CFR free 4% bio-plastics	PVC free, BFR/CFR free 7% bio-plastics 2% recycled plastics	PVC free, BFR/CFR free 7% bio-plastics 2% recycled plastics	PVC free, BFR/CFR free 5% bio-plastics
Highlighted features	Electronic image stabilization Shock detection Augmented overlay (radar) Built-in license plate capture assistant License plate capture up to 200 km/h Measure speed and capture License plate per vehicle (only ALPV supported)	Electronic image stabilization Shock detection Augmented overlay (radar) Edge-to-edge technology Picture-in-picture	Electronic image stabilization Shock detection Edge-to-edge technology	Electronic image stabilization Shock detection Edge-to-edge technology	Electronic image stabilization Shock detection Built-in wiper Edge-to-edge technology white LED	Electronic image stabilization Shock detection Built-in wiper Edge-to-edge technology white LED	Electronic image stabilization Shock detection Edge-to-edge technology

Box cameras

10

AXIS P15 Series

AXIS P13 Series

	AXIS P1518-LE 	AXIS P1518-E 	AXIS P1388 	AXIS P1388-B 	AXIS P1387 	AXIS P1387-B 
Max. video resolution	3840x2160 (8.3 MP)	3840x2160 (8.3 MP)	3840x2160 (8.3 MP)	3840x2160 (8.3 MP)	2592x1944 (5 MP)	2592x1944 (5 MP)
Sensor size/Lens/ Horizontal field of view	8 MP: 1x 1/1.2", 5.85 mm F1.5, 113.8° 2 MP: 1x 1/2.8", 10.9 - 29 mm F1.7, 29° - 11°	8 MP: 1x 1/1.2", 5.85 mm F1.5, 113.8° 2 MP: 1x 1/2.8", 10.9 - 29 mm F1.7, 29° - 11°	1/1.8" 3.9 - 10 mm, F1.5 122° - 46°	1/1.8", -, -	1/2.7" 2.8 - 13 mm, F1.4 112° - 24°	1/2.7", -, -
Min. illumination (lux) Color/B&W	8 MP: 0.05/0.00 2 MP: 0.06/0.00	8 MP: 0.05/0.01 2 MP: 0.06/0.01	0.15/0.03	- / -	0.1/0.02	- / -
Max. frames per second	8 MP: 25/30 2 MP: 50/60	8 MP: 25/30 2 MP: 50/60	50/60	50/60	50/60	50/60
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
Compute capabilities	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics AXIS Scene Metadata AXIS Video Motion Detection Audio Detection	AXIS Object Analytics AXIS Scene Metadata AXIS Video Motion Detection Audio Detection	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata
Power	PoE Class 4, DC	PoE Class 4, DC	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3, DC
In-/output ports	2/2	2/2	2/2	2/2	2/2	2/2
Operating temperature	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-10 °C to 55 °C (14 °F to 131 °F)	-10 °C to 55 °C (14 °F to 131 °F)	-10 °C to 55 °C (14 °F to 131 °F)	-10 °C to 55 °C (14 °F to 131 °F)
Approvals	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	-	-	-	-
WDR/Lightfinder	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -
OptimizedIR/Built-in IR	✓ / ✓	- / -	- / -	- / -	- / -	- / -
Secure Boot/Signed video/Secure keystore	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2
Sustainability	PVC free, BFR/CFR free 56% bio-plastics	PVC free, BFR/CFR free 56% bio-plastics	PVC free, BFR/CFR free 3% bio-plastics	PVC free, BFR/CFR free 3% bio-plastics	PVC free, BFR/CFR free 3% bio-plastics	PVC free, BFR/CFR free 3% bio-plastics
Highlighted features	Edge-to-edge technology Shock detection Low power mode Dynamic power moder Electronic image stabilization Traffic camera installation assistant	Edge-to-edge technology Shock detection Low power mode Dynamic power moder Electronic image stabilization Traffic camera installation assistant	Edge-to-edge technology Shock detection Electronic image stabilization	Edge-to-edge technology Shock detection Electronic image stabilization	Edge-to-edge technology Shock detection Electronic image stabilization	Edge-to-edge technology Shock detection Electronic image stabilization


[illegible]

Box cameras

12

	AXIS M11 Series				AXIS M10 Series	
	AXIS M1137 Mk II 	AXIS M1137-E Mk II 	AXIS M1135 Mk II 	AXIS M1135-E Mk II 	M1075-L Mk II 	AXIS M1055-L 
Max. video resolution	2592x1944 (5 MP)	2592x1944 (5 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/2.7", 2.8 - 13 mm, F1.4, 112° - 24° 1/2.7", i-CS lens 3.5 - 10 mm, F1.8, 99° - 31°	1/2.7", 2.8 - 13 mm, F1.4, 112° - 24° 1/2.7", i-CS lens 3.5 - 10 mm, F1.8, 99° - 31°	1/2.9", 3 - 10.5 mm, F1.4, 90° - 33° 1/2.9", i-CS lens 3.5 - 10 mm, F1.8, 101° - 33°	1/2.9", 3 - 10.5 mm, F1.4, 90° - 33° 1/2.9", i-CS lens 3.5 - 10 mm, F1.8, 101° - 33°	1/2.9" 3.16 mm, F2.0 103°	1/2.9" 3.16 mm, F2.0 103°
Min. illumination (lux) Color/B&W	DC-iris: 0.17/0.03 i-CS: 0.19/0.04	DC-iris: 0.17/0.03 i-CS: 0.19/0.04	DC-iris: 0.15/0.03 i-CS: 0.17/0.03	DC-iris: 0.15/0.03 i-CS: 0.17/0.03	0.18/0.00	0.18/0.00
Max. frames per second	25/30	25/30	25/30	25/30	25/30	25/30
Audio support/ Built-in mic	✓ / ✓	✓ / -	✓ / ✓	✓ / -	✓ / ✓	- / -
Compute capabilities	Machine learning processing unit	Machine learning processing unit	Machine learning processing unit	Machine learning processing unit	Deep learning processing unit	Deep learning processing unit
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata AXIS Audio Analytics	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata
Power	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3	PoE Class 2
In-/output ports	1/1	1/1	1/1	1/1	2	2
Operating temperature	-20 °C to 50 °C (-4 °F to 122 °F)	-25 °C to 50 °C (-13 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-25 °C to 50 °C (-13 °F to 122 °F)	0 °C to 35 °C (32 °F to 95 °F)	0 °C to 35 °C (32 °F to 95 °F)
Approvals	-	IP66/NEMA 4X, IK10	-	IP66/NEMA 4X, IK10	-	-
WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	WDR/Lightfinder	WDR/Lightfinder
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -
OptimizedIR/Built-in IR	- / -	- / -	- / -	- / -	- / ✓	- / ✓
Secure Boot/Signed video/Secure keystore	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Sustainability	PVC free 20% recycled plastics	PVC free	PVC free 20% recycled plastics	PVC free	PVC free 68% recycled plastics	PVC free, BFR/CFR free 70% recycled plastics
Highlighted features	Edge-to-edge technology Remote zoom & focus with i-CS lens	Edge-to-edge technology Remote zoom & focus with i-CS lens	Edge-to-edge technology Remote zoom & focus with i-CS lens	Edge-to-edge technology Remote zoom & focus with i-CS lens	Built-in PIR sensor HDMI Edge-to-edge technology WLAN option	Edge-to-edge technology

Bullet cameras

	AXIS Q18 Series					
	AXIS Q1809-LE 	AXIS Q1808-LE 	AXIS Q1806-LE 	AXIS Q1805-LE 	AXIS Q1800-LE 	AXIS Q1800-LE-3  
Max. video resolution	7424x5568 (41 MP)	3712x2784 (10.3 MP)	2880x1620 (4.7 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	4/3", 12 - 24 mm, F2.0-3.0, 90° - 44° 4/3", 50 - 150 mm, F4.0, 21° - 7°	4/3", 12 - 48 mm, F1.7 - 4.0, 90° - 21° 4/3", 50 - 150 mm, F4.0, 21° - 7°	1/1.8" 4.3 - 137 mm, F1.4 - 4.0 60° - 2.3°	1/2.8" 4.3 - 137 mm, F1.4 - 4.0 60° - 2.3°	1/2.8" 7 - 137 mm, F1.5 - 4.0 38° - 2.3°	1/2.8" 7 - 137 mm, F1.5 - 4.0 38° - 2.3°
Min. illumination (lux) Color/B&W	24 mm: 0.12/0.00 150 mm: 0.2/0.00	48 mm: 0.02/0.00 150 mm: 0.1/0.00	0.08/0.00	0.06/0.00	0.06/0.00	0.06/0.00
Max. frames per second	25/30	50/60	90	90	90	90
Optical zoom	24 mm: 2x 150 mm: 3x	48 mm: 4x 150 mm: 3x	32x	32x	20x	20x
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -
Compute capabilities	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit
Included video analytics (for Axis video analytics, see page 4)	Audio detection AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics AXIS Live Privacy Shield Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata	AXIS Object Analytics AXIS Live Privacy Shield Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata	AXIS Object Analytics AXIS Live Privacy Shield Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS License Plate Verifier Audio detection AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 4, AC, DC PoE Class 6 (with PoE out)	PoE Class 4, AC, DC PoE Class 6 (with PoE out)	PoE Class 4, AC, DC PoE Class 6 (with PoE out)	PoE Class 3 (no IR, no heaters) PoE Class 4, AC, DC PoE Class 6 (with PoE out)	PoE Class 3 (no IR, no heaters) PoE Class 4, AC, DC PoE Class 6 (with PoE out)	PoE Class 3 (no IR, no heaters) PoE Class 4, AC, DC PoE Class 6 (with PoE out)
In-/output ports	2	2	2	2	2	2
Operating temperature	-40 °C to 55 °C (-40 °F to 131 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)
Approvals	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/NEMA 4X, IK10	IP66/NEMA 4X, IK10
WDR/Lightfinder	Dynamic Contrast/Lightfinder	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -
Optimized IR/Built-in IR	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
Secure Boot/Signed video/Secure keystore	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2
Sustainability	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free
Highlighted features	Electronic image stabilization Shock detection Low power mode Dynamic power mode white LED for 12 - 24 mm Edge-to-edge technology	Electronic image stabilization Shock detection Low power mode Dynamic power mode white LED for 12 - 24 mm Edge-to-edge technology	Electronic image stabilization Shock detection Low power mode Dynamic power mode white LED for 12 - 24 mm Edge-to-edge technology Traffic camera installation assistant	Electronic image stabilization Shock detection Low power mode Dynamic power mode white LED for 12 - 24 mm Edge-to-edge technology Traffic camera installation assistant	Electronic image stabilization Shock detection Low power mode Dynamic power mode Traffic camera installation assistant Support for third-party LPR analytics	Electronic image stabilization Shock detection Low power mode Dynamic power mode Preinstalled ALPV Traffic camera installation assistant

Bullet cameras

14

	AXIS P14 Series						AXIS M20 Series			
	AXIS P1488-LE	AXIS P1487-LE	AXIS P1486-LE	AXIS P1486-LE Kit	AXIS P1485-LE	AXIS P1485-LE Kit	AXIS P1475-LE	AXIS M2048-LE	AXIS M2036-LE	AXIS M2035-LE
										
Max. video resolution	3840x2160 (8.3 MP)	2592x1944 (5 MP)	2048x1536 (3 MP)	2048x1536 (3 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	3840x2160 (8.3 MP)	2668x1512 (4 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/1.2" 5.9 - 13.8 mm, F1.5 - 2.8 114° - 46°	1/2.8" 3 - 8.5 mm, F1.36 - 2.58 106° - 35°	1/1.8" 10 - 40 mm, F1.3 - 1.4 42° - 11°	1/1.8" 10 - 40 mm, F1.3 - 1.4 42° - 11°	1/2.8" 10.8 - 28.2 mm, F1.7 - 1.76 29.4° - 11°	1/2.8" 10.8 - 28.2 mm, F1.7 - 1.76 29.4° - 11°	1/1.2" 3.1 - 9 mm, F1.6 - 2.9 117° - 36°	1/1.8 3.7 mm, F2.0 126°	1/2.7" 2.4 mm, F2.1 129°	1/2.9", 3.2 mm, F1.4, 101° 1/2.9", 7.5 mm, F1.6, 39°
Min. illumination (lux) Color/B&W	0.06/0.00	0.09/0.00	0.02/0.00	0.02/0.00	0.06/0.00	0.06/0.00	0.06/0.00	0.18/0.00	0.18/0.00	3.2 mm: 0.16/0.00 7.5 mm: 0.17/0.00
Max. frames per second	50/60	25/30	3 MP 50/60 fps 720p 200 fps 1024x768 270fps	3 MP 50/60 fps 720p 200 fps 1024x768 270 fps	50/60	50/60	50/60	12.5/15	25/30	25/30
Optical zoom	2.35x	2.86x	4x	4x	2.61x	2.61x	2.91	-	-	-
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -
Compute capabilities	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata AXIS Live Privacy Shield	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata AXIS Live Privacy Shield	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata AXIS Live Privacy Shield	AXIS License Plate Verifier Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata AXIS Live Privacy Shield	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata AXIS Live Privacy Shield	AXIS License Plate Verifier Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata AXIS Live Privacy Shield	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata AXIS Live Privacy Shield	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata Active tampering alarm AXIS Scene Metadata AXIS Live Privacy Shield	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata Active tampering alarm AXIS Scene Metadata AXIS Live Privacy Shield
Power	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3
In-/output ports	1/1	1/1	1/1	1/1	1/1	1/1	1/1	- / -	- / -	- / -
Operating temperature	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-30 °C to 55 °C (-22 °F to 131 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)
Approvals	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK08	IP66/IP67/NEMA 4X, IK08	IP66/IP67/NEMA 4X, IK08
WDR/Lightfinder	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder	WDR/Lightfinder	WDR/Lightfinder
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -
Optimized IR/Built-in IR	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	- / ✓	- / ✓	- / ✓
Secure Boot/Signed video/Secure keystore	✓ / ✓ / FIPS 140-2 Level 3	✓ / ✓ / FIPS 140-2 Level 3	✓ / ✓ / FIPS 140-2 Level 3	✓ / ✓ / FIPS 140-2 Level 3	✓ / ✓ / FIPS 140-2 Level 3	✓ / ✓ / FIPS 140-2 Level 3	✓ / ✓ / FIPS 140-2 Level 3	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Sustainability	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free
Highlighted features	Electronic image stabilization Edge-to-edge technology Shock detection	Electronic image stabilization Edge-to-edge technology Shock detection	Electronic image stabilization Global shutter image sensor Continuous and strobing IR illumination Sync out signal	Electronic image stabilization Global shutter image sensor Continuous and strobing IR illumination Sync out signal Preinstalled ALPV Traffic camera installation assistant	Electronic Image Stabilization Edge-to-edge technology Shock detection	Electronic image stabilization Edge-to-edge technology Shock detection Preinstalled ALPV Traffic camera installation assistant	Electronic Image Stabilization Edge-to-edge technology Shock detection	Edge-to-edge technology Direct installation view via Bluetooth* Power meter	Edge-to-edge technology	Edge-to-edge technology

*Available in selected markets

Modular cameras

AXIS P12 Series

	AXIS P1275 Mk II	AXIS P1265 Mk II	AXIS P1245 Mk II
			
Max. video resolution	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920 x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/2.9" 2.8 – 6mm, F2.0 99 – 35°	1/2.9" 3.7mm, F2.5 91°	1/2.9" 2.8mm, F2.0 111°
Min. illumination (lux) Color/B&W	0.2/-	0.2/-	0.2/-
Max. frames per second	25/30	25/30	25/30
Sensitivity	-	-	-
Detection range (m/yd.)	-	-	-
Audio support/ Built-in mic	- / -	- / -	- / -
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics AXIS Scene Metadata	AXIS Object Analytics AXIS Scene Metadata	AXIS Object Analytics AXIS Scene Metadata
Power	PoE Class 2	PoE Class 2	PoE Class 2
In-/output ports	- / -	- / -	- / -
Operating temperature	-20 °C to 45 °C (-4 °F to 113 °F)	-20 °C to 45 °C (-4 °F to 113 °F)	-20 °C to 45 °C (-4 °F to 113 °F)
Approvals	-	-	-
WDR/Lightfinder	Forensic Capture / -	Forensic Capture / -	Forensic Capture / -
Zipstream/H.264/H.265	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
OptimizedIR/Built-in IR	- / -	- / -	- / -
Secure Boot/Signed video/ Secure keystore	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Sustainability	PVC free	PVC free	PVC free
Highlighted features	-	-	Exchangable lenses

AXIS F Series

	AXIS F9104-B Mk II	AXIS F9111-R Mk II	AXIS F9114-R Mk II	AXIS F9114-B Mk II
				
Max. video resolution	3840x2160 (4K)	3840x2160 (4K)	3840x2160 (4K)	3840x2160 (4K)
Sensor size/Lens/ Horizontal field of view	-	-	-	-
Min. illumination (lux) Color/B&W	-	-	-	-
Max. frames per second	60	180	60	60
Audio support/ Built-in mic	- / -	✓ / -	✓ / -	✓ / -
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics Active tampering alarm AXIS Scene Metadata
Power	PoE Class 4, DC	PoE Class 4, DC	PoE Class 4, DC	PoE Class 4, DC
In-/output ports	- / -	4	4	4
Operating temperature	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 to 60 °C (-40 °F to 140 °F)
Approvals	-	-	-	-
WDR/Lightfinder	Forensic WDR / -	Forensic WDR / -	Forensic WDR / -	Forensic WDR / -
Zipstream/H.264/H.265	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
OptimizedIR/Built-in IR	- / -	- / -	- / -	- / -
Secure Boot/ Signed video/ Secure keystore	✓ / - / ✓	✓ / - / ✓	✓ / - / ✓	✓ / - / ✓
Sustainability	PVC free	PVC free	PVC free	PVC free
Highlighted features	Group view Supports 4 sensor units	Ignition control	Ignition control Group view Supports 4 sensor units	Group view Supports 4 sensor units

Modular cameras

	AXIS F Series										
	AXIS F2105-RE	AXIS F2107-RE	AXIS F2108	AXIS F2115-R	AXIS F2135-RE	AXIS F2137-RE	AXIS F2180-TE	AXIS F4108	AXIS F4105-SLRE	AXIS F4105-LRE	AXIS F7225-RE
											
Sensor size/Lens/ Horizontal field of view	1/2.8" 3 mm, F2.0 108°	1/2.78" 2.8 mm, F2.2 110°	1/2.9" 4.3 mm, F1.8 110°	1/2.8" 3.2 - 5.7 mm, F2.2 - F3.1 107° - 56°	1/2.8" 1.98 mm, F2.0 185°	1/2.78" 1.98 mm, F2.0 185°	Uncooled microbolometer Athermalized lens F1.1, 57° F1.1, 95°	1/2.9" 4.3 mm, F1.8 107°	1/2.8" 2.8 mm, F1.6 110°	1/2.8" 2.8 mm, F1.6 110°	1/2.8" 3.7 mm, F2.5 97°
Min. illumination (lux) Color/B&W	0.1 / -	0.25 / -	0.4 / -	0.1 / -	0.1 / -	0.25 / -	- / -	0.5 / -	0.3	0.3	0.3 / -
Max. frames per second	See AXIS F91XX Main Units	See AXIS F91XX Main Units	See AXIS F91XX Main Units	See AXIS F91XX Main Units	See AXIS F91XX Main Units	See AXIS F91XX Main Units	8.3	See AXIS F91XX Main Units	See AXIS F91XX Main Units	See AXIS F91XX Main Units	See AXIS F91XX Main Units
Audio support/ Built-in mic	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -
Included video analytics (for Axis video analytics, see page 4)	-	-	-	-	-	-	-	-	-	-	-
Power	-	-	-	-	-	-	-	-	-	-	-
In-/output ports	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -
Operating temperature	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-10 °C to 60 °C (14 °F to 140 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-30 °C to 55 °C (-22 °F to 131 °F)	-30 °C to 55 °C (-22 °F to 131 °F)	-30 °C to 55 °C (-22 °F to 131 °F)
Approvals	IP66/IP67/IP6K9K	IP66/IP67/IP6K9K	-	IP5X	IP66/IP67/IP6K9K	IP66/IP67/IP6K9K	IP66/IP67/IP6K96	IP42	IP66/IP67/IP69 NEMA 4X/NSF/ANSI Standard 169, IK10	IP66/IP67/IP6K9K IK10	IP66/IP67
WDR/Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	- / -	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder
Zipstream/H.264/H.265	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / -	- / - / -	- / - / -	- / - / -	- / - / -
OptimizedIR/Built-in IR	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / ✓	- / ✓	- / -
Secure Boot/Signed video/Secure keystore	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -
Sustainability	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free
Highlighted features	Exchangable lenses	-	-	-	-	-	Spot temperature reading Polygonal detection areas	-	Exchangable lenses	Exchangable lenses	-

Modular cameras

17

AXIS FA Series

	AXIS FA54	AXIS FA51-B	AXIS FA51	AXIS FA4115 ¹	AXIS FA3105-L ¹	AXIS FA1125 ¹	AXIS FA1105 ¹
							
Max. video resolution	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	-	-	-	1/3" 2.8 – 6.0 mm, F2.0 99° – 53°	1/3" 3.13 mm, F2.0 103°	1/3" 3.7 mm, F2.5 91°	1/3" 2.8 mm, F2.0 111°
Min. illumination (lux) Color/B&W	-	-	-	0.2 / -	0.2 / -	0.25 / -	0.2 / -
Max. frames per second	25/30	25/30	25/30	25/30	25/30	25/30	25/30
Audio support/ Built-in mic	✓ / -	- / -	- / -	- / -	- / -	- / -	- / -
Included video analytics (for Axis video analytics, see page 4)	Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection AXIS Face Detector Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection AXIS Face Detector Active tampering alarm	-	-	-	-
Power	DC	PoE Class 3	PoE Class 3	-	-	-	-
In-/output ports	4	2	2	- / -	- / -	- / -	- / -
Operating temperature	0 °C to 45 °C (32 °F to 113 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)
Approvals	-	-	-	-	-	-	-
WDR/Lightfinder	Forensic WDR / -	Forensic WDR / -	Forensic WDR / -	Forensic WDR / -	Forensic WDR / -	Forensic WDR / -	Forensic WDR / -
Zipstream/H.264/H.265	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	- / - / -	- / - / -	- / - / -	- / - / -
OptimizedIR/Built-in IR	- / -	- / -	- / -	- / -	- / ✓	- / -	- / -
Secure Boot/ Signed video/Secure keystore	- / - / -	✓ / - / ✓	✓ / - / ✓	- / - / -	- / - / -	- / - / -	- / - / -
Sustainability	PVC free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free	PVC free	PVC free	PVC free
Highlighted features	Supports 4 sensor units 2x memory card slots HDMI Quad view	Supports 1 sensor unit Memory card slot HDMI	Barebone Supports 1 sensor unit Memory card slot HDMI	-	-	-	Exchangable lenses

1. For use with AXIS FA Main Unit



AXIS Site Designer

Faster from draft to done

- > Intuitive design of any surveillance system
- > Easily plan camera placement and coverage
- > Generate storage recommendations
- > Quickly create quotes and project documentation
- > Import settings into your VMS

Read more on: axis.com/support/tools/axis-site-designer

Dome cameras

18

	AXIS Q93	AXIS Q92	AXIS Q36 Series			AXIS Q35 Series			
	AXIS Q9307-LV 	AXIS Q9227-SLV 	AXIS Q3628-VE 	AXIS Q3626-VE 	AXIS Q3558-LVE 	AXIS Q3556-LVE 	AXIS Q3548-LVE 	AXIS Q3546-LVE 	AXIS Q3538-SLVE 
Max. video resolution	2592x1944 (5 MP)	2880x2160 (5 MP)	3840x2160 (8.3 MP)	2688x1512 (4.1 MP)	3840x2160 (8.3 MP)	2688x1512 (4.1 MP)	3840x2160 (8.3 MP)	2688x1512 (4.1 MP)	3840x2160 (8.3 MP)
Sensor size/Lens/ Horizontal field of view	1/2.7" 3 - 8 mm, F1.3 104° - 40°	1/1.7" 3.7 mm, F2.0 115°	1/1.2" 6.2-12.9 mm, F1.6 - 2.9 103° - 48°	1/1.8" 4.3 - 8-6 mm, F1.5 - 2.4 103° - 52°	1/1.2" 6.3 - 13 mm, F1.5 - 2.9 104° - 48°	1/1.8" 4.7 - 10 mm, F1.1 - 1.2 101° - 44°	1/1.2" 6.3 - 13 mm, F1.5 - 2.9 104° - 48°	1/1.8" 4.7 - 10 mm, F1.1 - 1.2 101° - 44°	1/1.2" 6.2 -12.9 mm, F1.6 - 2.9 103° - 49°
Min. illumination (lux) Color/B&W	0.13/0.00	0.06/0.00	0.07/0.01	0.06/0.01	0.04/0.00	0.01/0.00	0.04/0.00	0.01/0.00	0.07/0.00
Max. frames per second	25/30	25/30	50/60	50/60	50/60	100/120	50/60	100/120	50/60
Audio support/ Built-in mic	✓ / 4	✓ / ✓	✓ / -	✓ / -	- / - Acoustic sensor	- / - Acoustic sensor	✓ / -	✓ / -	✓ / -
Compute capabilities	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata Coughing fit and stressed voice detection	AXIS Object Analytics AXIS Audio Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Audio Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Audio Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata
Power	PoE Class 4	PoE Class 3	PoE Class 4, DC	PoE Class 4, DC	PoE Class 4, DC	PoE Class 4, DC	PoE Class 4, DC	PoE Class 4, DC	PoE Class 4, DC
In-/output ports	1/1	1/1	2	2	2	2	2	2	2
Operating temperature	Temperature: 0 °C to 40 °C (32 °F to 104 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-50 °C to 55 °C (-58 °F to 131 °F)	-50 °C to 55 °C (-58 °F to 131 °F)	-50 °C to 55 °C (-58 °F to 131 °F)	-50 °C to 55 °C (-58 °F to 131 °F)	-50 °C to 55 °C (-58 °F to 131 °F)	-50 °C to 55 °C (-58 °F to 131 °F)	-50 °C to 55 °C (-58 °F to 131 °F)
Approvals	IP44- and IK08-rated	IP66/IP6K9K/NEMA 4X, IK11	IP66/NEMA 250 Type 4X/NEMA TS 2 (2.2.7-2.2.9), IK10, IP6K9K	IP66/NEMA 250 Type 4X/NEMA TS 2 (2.2.7-2.2.9), IK10, IP6K9K	IP66/NEMA 250 Type 4X/NEMA TS 2 (2.2.7-2.2.9)	IP66/NEMA 250 Type 4X/NEMA TS 2 (2.2.7-2.2.9), IK10, IP6K9K	IP66/NEMA 250 Type 4X/NEMA TS 2 (2.2.7-2.2.9), IK10, IP6K9K	IP66/NEMA 250 Type 4X/NEMA TS 2 (2.2.7-2.2.9), IK10, IP6K9K	NSF/ANSI Standard 169, DNV IP66/NEMA 250 Type 4X/NEMA TS 2 (2.2.7-2.2.9), IK10+, IP6K9K
WDR/Lightfinder	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓
OptimizedIR/ Built-in IR	✓ / ✓	✓ * / ✓	- / -	- / -	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
Secure Boot/Signed video/Secure keystore	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-3	✓ / ✓ / FIPS 140-3	✓ / ✓ / FIPS 140-3	✓ / ✓ / FIPS 140-3	✓ / ✓ / FIPS 140-2 Level 2
Sustainability	PVC free	PVC free, BFR/CFR free	PVC free, BFR/CFR free 62% bio-plastics 2% recycled plastics	PVC free, BFR/CFR free 62% bio-plastics 2% recycled plastics	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free
Highlighted features	Two-way audio Echo cancellation Chemical resistant casing LED Indicators	White LED Indication LED Built-in speaker On/off switch	Electronic image stabilization Shock detection Pan-tilt-roll-zoom (PTRZ)	Electronic image stabilization Shock detection Pan-tilt-roll-zoom (PTRZ)	Electronic image stabilization Shock detection	Electronic image stabilization Shock detection	Electronic image stabilization Shock detection	Electronic image stabilization Shock detection	Electronic image stabilization Shock detection

* 940nm IR LEDs

Dome cameras

19

	AXIS P91	AXIS P39 Series			
	AXIS P9117-PV 	AXIS P3935-LR 	AXIS P3925-R 	AXIS P3925-LRE 	AXIS P3905-R Mk III 
Max. video resolution	2160x2160 (6 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/1.8" 1.1 mm, F2.2 182°	1/2.9" 2.8 mm, F1.6 110°	1/2.9" 2.8 mm, F1.6 110°	1/2.9" 6.0 mm, F1.9 56°	1/2.9", 3.6 mm, F2.0, 88° 1/2.9", 2.8 mm, F1.5, 107°
Min. illumination (lux) Color/B&W	0.16/0.03	0.06/0.01	0.06/0.01	0.07/0.02	0.13/-
Max. frames per second	50/60	25/30	25/30	25/30	25/30
Audio support/ Built-in mic	✓ / ✓	✓ / ✓	- / -	- / -	- / -
Compute capabilities	Deep learning processing unit	-	-	-	-
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata AXIS Audio Analytics Elevator door state detector	AXIS Guard Suite Blocked view detection Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Blocked view detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 3	PoE Class 3	PoE Class 2	PoE Class 3	PoE Class 1
In-/output ports	- / -	1/1	- / -	- / -	- / -
Operating temperature	-15 °C to 50 °C (5 °F to 122 °F)	Normal: -40 °C to 55 °C (-40 °F to 131 °F) Maximum (intermittent): 70 °C (158 °F)	Normal: -40 °C to 55 °C (-40 °F to 131 °F) Maximum (intermittent): 70 °C (158 °F)	Normal: -40 °C to 55 °C (-40 °F to 131 °F) Maximum (intermittent): 70 °C (158 °F)	Normal: -30 °C to 55 °C (-22 °F to 131 °F) Maximum (intermittent): 70 °C (158 °F)
Approvals	IP66 (Indoor only), IK10	IP66/IP67/NEMA 4X (Indoor only), NFPA 130 compliance, EN45545, EN50155, IK10	IP66/IP67/NEMA 4X (Indoor only), NFPA 130 compliance, EN45545, EN50155 IK10	IP66/IP67/IP6K9K/NEMA 4X, EN45545, EN50155 IK10+	P66/IP67/NEMA 4X (Indoor only), EN45545, EN50155 IK10
WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -
OptimizedIR/Built-in IR	- / -	- / ✓	- / -	- / ✓	- / -
Secure Boot/ Signed video/Secure keystore	✓ / ✓ / ✓	✓ / - / -	✓ / - / -	✓ / - / -	✓ / ✓ / ✓
Sustainability	PVC free	PVC free	PVC free	PVC free	PVC free, BFR/CFR free
Highlighted features	PoE over 2-wire	Electronic image stabilization Shock detection Suited for indoor onboard surveillance	Electronic image stabilization Shock detection Suited for indoor onboard surveillance	Electronic image stabilization Shock detection Suited for exterior onboard monitoring	Suited for indoor onboard surveillance

Dome cameras

	AXIS P32 Series						
	AXIS P3288-LVE 	AXIS P3288-LV 	AXIS P3287-LVE 	AXIS P3287-LV 	AXIS P3285-LVE 	AXIS P3285-LVE Kit 	AXIS P3285-LV 
Max. video resolution	3840x2160 (8.3 MP)	3840x2160 (8.3 MP)	2592x1944 (5 MP)	2592x1944 (5 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/1.8" 4.4 - 14.6 mm, F1.65 - 3.65 103° - 29°	1/1.8" 4.4 - 14.6 mm, F1.65 - 3.65 103° - 29°	1/2.8" 3.0 - 8.5 mm, F1.38 - 2.58 104° - 34°	1/2.8" 3.0 - 8.5 mm, F1.38 - 2.58 104° - 34°	10 mm: 1/2.8", 3.4 - 9.8 mm F1.4 - 2.7, 100° - 32° 29 mm: 1/2.8", 10.8 - 28.2 mm F1.70 - 1.76, 29.1° - 11°	1/2.8" 3.4 - 9.8 mm, F1.4 - 2.7 100° - 32°	1/2.8" 3.4 - 9.8 mm, F1.4 - 2.7 100° - 32°
Min. illumination (lux)Color/ B&W	0.11/0.00	0.11/0.00	0.1/0.00	0.1/0.00	0.08/0.00	0.08/0.00	0.08/0.00
Max. frames per second	25/30	25/30	25/30	25/30	50/60	50/60	50/60
Audio support/ Built-in mic	- / - Acoustic sensor	- / - Acoustic sensor	- / - Acoustic sensor	- / - Acoustic sensor	- / - Acoustic sensor	- / - Acoustic sensor	- / - Acoustic sensor
Compute capabilities	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics AXIS Audio Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Audio Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Audio Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Audio Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Audio Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Audio Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Scene Metadata AXIS License Plate Verifier	AXIS Object Analytics AXIS Audio Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata
Power	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3
In-/output ports	1/1	1/1	1/1	1/1	1/1	1/1	1/1
Operating temperature	-40 °C to 50 °C (-40 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)
Approvals	IP66/IP67/NEMA 250 Type 4X/ NEMA TS 2 (2.2.7), IK10	IK10	IP66/IP67/NEMA 250 Type 4X/ NEMA TS 2 (2.2.7), IK10	IK10	IP66/IP67/NEMA 250 Type 4X/ NEMA TS 2 (2.2.7), IK10	IP66/IP67/NEMA 250 Type 4X/ NEMA TS 2 (2.2.7), IK10	IK10
WDR/Lightfinder	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓
OptimizedIR/Built-in IR	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
Secure Boot/Signed video/Secure keystore	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3
Sustainability	PVC free, BFR/CFR free 43% bio-plastics 2% carbon capture-based plastics	PVC free, BFR/CFR free 39% bio-plastics 2% carbon capture-based plastics	PVC free, BFR/CFR free 43% bio-plastics 2% carbon capture-based plastics	PVC free, BFR/CFR free 39% bio-plastics 2% carbon capture-based plastics	PVC free, BFR/CFR free 43% bio-plastics 2% carbon capture-based plastics	PVC free, BFR/CFR free 43% bio-plastics 2% carbon capture-based plastics	PVC free, BFR/CFR free 39% bio-plastics 2% carbon capture-based plastics
Highlighted features	Case open sensor Conduit-ready	Case open sensor Conduit-ready	Case open sensor Conduit-ready	Case open sensor Conduit-ready	Case open sensor Conduit-ready	Case open sensor Conduit-ready Preinstalled ALPV Traffic camera installation assistant	Case open sensor Conduit-ready

Dome cameras

21

	AXIS P32 Series								AXIS M39
	AXIS P3278-LVE	AXIS P3278-LV	AXIS P3277-LVE	AXIS P3277-LV	AXIS P3275-LVE	AXIS P3275-LV	AXIS P3275-V	AXIS P3268-SLVE	AXIS M3905-R
									
Max. video resolution	3840x2160 (8.3 MP)	3840x2160 (8.3 MP)	2592x1944 (5 MP)	2592x1944 (5 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	3840x2160 (8.3 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/1.8" 4.4–14.6 mm, F1.65–3.65 103°– 29°	1/1.8" 4.4–14.6 mm, F1.65–3.65 103°– 29°	1/2.8" 3.0–8.5 mm, F1.38–2.58 104°– 34°	1/2.8" 3.0–8.5 mm, F1.38–2.58 104°– 34°	10 mm: 1/2.8", 3.4 – 9.8 mm F1.4 – 2.7, 100°– 32° 29 mm: 1/2.8", 10.8 – 28.2 mm F1.70 – 1.76, 29.1°– 11°	1/2.8" 3.4 – 9.8 mm, F1.4 – 2.7 100°– 32°	1/2.8" 3.4 – 9.8 mm, F1.4 – 2.7 100°– 32°	1/1.8" 4.3 – 8.6 mm, F1.5 100°– 53°	1/2.9", 3.6 mm, F2.0, 88° 1/2.9", 2.8 mm, F1.5, 107°
Min. illumination (lux) Color/ B&W	0.11/0.00	0.11/0.00	0.1/0.00	0.1/0.00	0.08/0.00	0.08/0.00	0.08/0.02	0.14/0.00	0.07/0.00
Max. frames per second	25/30	25/30	25/30	25/30	50/60	50/60	50/60	25/30	25/30
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / ✓*	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	- / -
Compute capabilites	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	-
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics Audio detection AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 1
In-/output ports	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1	- / -
Operating temperature	-40 °C to 50 °C (-40 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	Normal: -30 °C to 55 °C (-22 °F to 131 °F) Maximum (intermittent): 70 °C (158 °F)
Approvals	IP66/IP67/NEMA 250 Type 4X/ NEMA TS 2 (2.2.7), IK10	IK10	IP66/IP67/NEMA 250 Type 4X/ NEMA TS 2 (2.2.7), IK10	IK10	IP66/IP67/NEMA 250 Type 4X/ NEMA TS 2 (2.2.7), IK10	IK10	IK10	NSF/ANSI Standard 169, DNV IP66/NEMA 250 Type 4X/ NEMA TS 2 (2.2.7-2.2.9), IK10, IP6K9K	P66/IP67/NEMA 4X (Indoor only), IK10
WDR/Lightfinder	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/ Lightfinder 2.0	Forensic WDR/Lightfinder
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -
OptimizedIR/Built-in IR	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	- / -	✓ / ✓	- / -
Secure Boot/Signed video/Secure keystore	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / ✓	✓ / ✓ / ✓
Sustainability	PVC free, BFR/CFR free 43% bio-plastics 2% carbon capture-based plastics	PVC free, BFR/CFR free 39% bio-plastics 2% carbon capture-based plastics	PVC free, BFR/CFR free 43% bio-plastics 2% carbon capture-based plastics	PVC free, BFR/CFR free 39% bio-plastics 2% carbon capture-based plastics	PVC free, BFR/CFR free 43% bio-plastics 2% carbon capture-based plastics	PVC free, BFR/CFR free 39% bio-plastics 2% carbon capture-based plastics	PVC free, BFR/CFR free 39% bio-plastics 2% carbon capture based plastic	PVC free, BFR/CFR free	PVC free, BFR/CFR free
Highlighted features	Case open sensor Conduit-ready Edge-to-edge technology	Case open sensor Conduit-ready Edge-to-edge technology	Case open sensor Conduit-ready Edge-to-edge technology	Case open sensor Conduit-ready Edge-to-edge technology	Case open sensor Conduit-ready Edge-to-edge technology	Case open sensor Conduit-ready Edge-to-edge technology	Case open sensor Conduit-ready Edge-to-edge technology	Case open sensor Conduit-ready Edge-to-edge technology	-

* AXIS P3277-LVE Mic: Built-in microphone, AXIS Audio Analytics

Dome cameras

22

	AXIS M32 Series				AXIS M31 Series				AXIS M30 Series			
	AXIS M3216-LVE	AXIS M3215-LVE	AXIS M3138-LVE	AXIS M3128-LVE (black and white)	AXIS M3126-LVE (black and white)	AXIS M3125-LVE (black and white)	AXIS M3098-V	AXIS M3098-LV	AXIS M3098-H	AXIS M3088-V	AXIS M3086-V	AXIS M3085-V
												
Max. video resolution	2688x1512 (4.1 MP)	1920x1080 (2.1 MP)	3840x2160 (8 MP)	3840x2160 (8.3 MP)	2688x1512 (4.1 MP)	1920x1080 (2.1 MP)	3840x2160 (8.2 MP)	3840x2160 (8.2 MP)	3840x2160 (8.2 MP)	3840x2160 (8.3 MP)	2688x1512 (4.1 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/2.7" 2.9 mm, F2.0 102°	1/2.9" 3.1 mm, F2.0 101°	1/1.8" 3.7 mm, F2.0 126°	1/2.8" 2.9 mm, F2.0 110°	1/2.7" 2.4 mm, F2.1 130°	1/2.8" 2.9 mm, F2.0 110°	1/1.8" 3.76 mm, F2.0 124°	1/1.8" 3.76 mm, F2.0 124°	1/1.8" 3.76 mm, F2.0 124°	1/2.8" 2.9 mm, F2.0 109°	1/2.7" 2.4 mm, F2.1 130°	1/2.9" 3.1 mm, F2.0 102°
Min. illumination (lux) Color/B&W	0.16/0.00	0.14/0.00	0.18/0.04	0.22/0.00	0.19/0.00	0.15/0.00	0.19/0.05	0.19/0.05	0.19/0.05	0.25 / 0.05	0.19/0.03	0.18/0.03
Max. frames per second	25/30	25/30	12.5/15	12/15	25/30	50/60	12/15	12/15	12/15	12/15	25/30	25/30
Audio support/ Built-in mic	✓ / -	✓ / -	- / - Acoustic sensor	- / -	- / -	- / -	- / - Acoustic sensor	- / - Acoustic sensor	- / - Acoustic sensor	✓ / -	✓ / ✓*	✓ / -
Compute capabilities	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield Audio detection AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield Audio detection AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Audio Analytics AXIS Scene Metadata AXIS Image health analytics	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Live Privacy Shield Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Audio Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Audio Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Scene Metadata Active tampering alarm AXIS Live Privacy Shield	AXIS Object Analytics AXIS Video Motion Detection AXIS Scene Metadata Active tampering alarm AXIS Live Privacy Shield AXIS Audio Analytics**	AXIS Object Analytics AXIS Video Motion Detection AXIS Scene Metadata Active tampering alarm AXIS Live Privacy Shield
Power	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 2	PoE Class 2	PoE Class 2
In-/output ports	1/1	1/1	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -
Operating temperature	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	0 °C to 45 °C (32 °F to 113 °F)	0 °C to 45 °C (32 °F to 113 °F)	0 °C to 45 °C (32 °F to 113 °F)	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 45 °C (32 °F to 113 °F)	0 °C to 45 °C (32 °F to 113 °F)
Approvals	IP66/NEMA 250 Type 4X/NEMA TS 2 (2.2.7-2.2.9), IK10	IP66/NEMA 250 Type 4X/NEMA TS 2 (2.2.7-2.2.9), IK10	IP66/NEMA 250 Type 4X, IK08	IP66/67/NEMA 250 Type 4X	IP66/67/NEMA 250 Type 4X	IP66/67/NEMA 250 Type 4X	IP 42/IK08	IK08	-	IK08	IK08	IK08
WDR/Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	WDR/Lightfinder 2.0	WDR / -	WDR/Lightfinder	WDR/Lightfinder	WDR/Lightfinder 2.0	WDR/Lightfinder 2.0	WDR/Lightfinder 2.0	WDR / -	WDR/Lightfinder	WDR/Lightfinder
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	- / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -
Optimized IR/ Built-in IR	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	- / -	✓ / ✓	- / -	- / -	- / -	- / -
Secure Boot/ Signed video/ Secure keystore	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Sustainability	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free	PVC free	PVC free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free 57% recycled plastics	PVC free, BFR/CFR free 57% recycled plastics	PVC free, BFR/CFR free 57% recycled plastics
Highlighted features	Case open sensor Conduit-ready Edge-to-edge technology	Case open sensor Conduit-ready Edge-to-edge technology	Edge-to-edge technology Direct installation view via Bluetooth Power meter Dynamic power mode Low power mode	Edge-to-edge technology Power meter Dynamic Power mode	-	-	Edge-to-edge technology Bluetooth***	Edge-to-edge technology Bluetooth***	Edge-to-edge technology Bluetooth***	Edge-to-edge technology	Edge-to-edge technology	Edge-to-edge technology

*AXIS M3086-V Mic: Built-in microphone, AXIS Audio Analytics **Available for AXIS M3086-V Mic ***Available in selected markets

Dome cameras

[illegible]

Panoramic cameras

24

	AXIS Q48	AXIS Q38 Series			AXIS P47 Series			AXIS P38 Series	
	AXIS Q4809-PVE 	AXIS Q3839-SPVE 	AXIS Q3839-PVE 	AXIS P4708-PLVE 	AXIS P4707-PLVE 	AXIS P4705-PLVE 	AXIS P3827-PVE 	AXIS P3818-PVE 	
Max. video resolution	10240x2560 (26 MP)	7552x3776 (29 MP)	7552x3776 (29 MP)	2x 3840x2160 (2x 8 MP)	2x 2592x1944 (2x 5 MP)	2x 1920x1080 (2x 2 MP)	3712x1856 (6.9 MP)	5120x2560 (13.1 MP)	
Sensor size/Lens/ Horizontal field of view	4x 1/2.3", 5.05 mm F1.7, 180°	4x 1/1.8", 4.6 mm F1.8, 180°	4x 1/1.8", 4.6 mm F1.8, 180°	2x 1/2.8", 3.3–8.1 mm F1.9–3.2, 108°–40°	2x 1/2.7", 3.3 – 8.1 mm F1.9 – 3.2, 98°– 36°	2x 1/2.8", 3.3 – 8.1 mm F1.9 – 3.2, 107°– 39°	4x 1/2.8", 3.3 mm F2.0, 180°	3x 1/2.8", 3.2 mm F2.0, 180°	
Min. illumination (lux) Color/B&W	0.10/0.03	0.10/0.03	0.10/0.03	0.19/0.00	0.19/0.00	0.15/0.00	0.15/0.05	0.15/0.06	
Max. frames per second	25/30	25/30	25/30	25/30	25/30	50/60	25/30	25/30	
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	
Compute capabilities	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	-	
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics on all channels AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics on all channels AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics on all channels AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	
Power	PoE Class 4	PoE Class 4	PoE Class 4	PoE Class 4	PoE Class 4	PoE Class 3 with limited IR range PoE Class 4 with full IR range	PoE Class 4	PoE Class 4	
In-/output ports	1/1	1/1	1/1	-	-	-	1/1	1/1	
Operating temperature	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-40 °C to 55 °C (-40 °F to 131 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	
Approvals	IP66/67/NEMA 4X, IK10	SF/ANSI Standard 169, IP66/NEMA 250 Type 4X IK10, IP66, IP67, IP68, IP6K9K	IP66/67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/67/NEMA 4X, IK10	
WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	
OptimizedIR/Built-in IR	- / -	- / -	- / -	✓ / ✓	✓ / ✓	✓ / ✓	- / -	- / -	
Secure Boot/Signed video/Secure keystore	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / - / FIPS 140-2 Level 2	
Sustainability	PVC free, BFR/CFR free 16% recycled plastics 14% bio-plastics 2.6% carbon capture-based plastics	PVC free, BFR/CFR free 16% recycled plastics 14% bio-plastics 2.6% carbon capture-based plastics	PVC free, BFR/CFR free 16% recycled plastics 14% bio-plastics 2.6% carbon capture-based plastics	PVC free, BFR/CFR free 7% recycled plastics 2% bio-plastics	PVC free, BFR/CFR free 7% recycled plastics 2% bio-plastics	PVC free, BFR/CFR free 7% recycled plastics 2% bio-plastics	PVC free, BFR/CFR free 15% recycled plastics	PVC free 15% recycled plastics	
Highlighted features	Horizon Straightening Remote Pan/Tilt/Roll	Stainless Steel, Horizon Straightening Remote Pan/Tilt/Roll	Horizon Straightening Remote Pan/Tilt/Roll	1 IP address Remote zoom & focus Group view Individually controllable IR LEDs	1 IP address Remote zoom & focus Group view Individually controllable IR LEDs	1 IP address Remote zoom & focus Group view Individually controllable IR LEDs	1 IP address Vertical FoV 90	1 IP address Vertical FoV 90	

Panoramic cameras

25

	AXIS P37 Series					AXIS M43 Series		
	AXIS P3748-PLVE	AXIS P3747-PLVE	AXIS P3738-PLE	AXIS P3737-PLE	AXIS P3735-PLE	AXIS M4328-P	AXIS M4327-P	AXIS M4308-PLE
								
Max. video resolution	4x 3840x2160 (4x 4K)	4x 2592x1944 (4x 5 MP)	4x 3840x2160 (4x 8 MP)	4x 2592x1944 (4x 5 MP)	4x 1920x1080p (4x 2 MP)	2992x2992 (12 MP)	2160x2160 (6 MP)	2880x2880 (12 MP)
Sensor size/Lens/ Horizontal field of view	4x 1/2.9" 3.2 - 7.4 mm, F1.6 - 2.7 103° - 41°	4x 1/2.8" 3.2 - 7.4 mm, F1.6 - 2.7 98-40	4x 1/2.8" 3.2 - 8.1 mm, F1.9 - 3.2 108° - 40°	4x 1/2.7" 3.2 - 8.1 mm, F1.9 - 3.2 99° - 37°	4x 1/2.8" 3.2 - 8.1 mm, F1.9 - 3.2 108° - 40°	1/2.3" 1.2 mm, F2.2 182°	1/1.8" 1.1 mm, F2.2 182°	1/1.7" 1.3 mm, F2.4 183°
Min. illumination (lux) Color/B&W	0.4/0.00	0.1/0.00	0.19/0.00	0.19/0.00	0.14/0.00	0.19/0.00	0.16/0.00	0.19/0.00
Max. frames per second	12.5/15	25/30*	12.5/15	25/30*	25/30	25/30	50/60	25/30
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / ✓
Compute capabilities	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics on all channels AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics on all channels AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics on all channels AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics on all channels AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics on all channels AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm Audio detection AXIS Scene Metadata
Power	PoE Class 4	PoE Class 4	PoE Class 4	PoE Class 3 w/o IR PoE Class 4 w IR	PoE Class 3 w/o IR PoE Class 4 w IR	PoE Class 3	PoE Class 3	PoE Class 4
In-/output ports	-	-	-	-	-	-	-	1/1
Operating temperature	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)	-40 °C to 50 °C (-40 °F to 122 °F)
Approvals	IP66/NEMA4X	IP66/NEMA4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	-	-	IP66/NEMA 4X, IK09
WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -
OptimizedIR/Built-in IR	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	- / -	- / -	✓ / ✓
Secure Boot/Signed video/Secure keystore	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Sustainability	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free
Highlighted features	1 IP address IK10, PTRZ Group view Individually controllable IR LEDs	1 IP address IK10, PTRZ Group view Individually controllable IR LEDs	1 IP address IK09, Remote zoom & focus Group view Individually controllable IR LEDs	1 IP address IK09, Remote zoom & focus Group view Individually controllable IR LEDs	1 IP address IK09, Remote zoom & focus Group view Individually controllable IR LEDs	Dewarped views	Dewarped views	Dewarped views

*25/30 with camera in Quad HD, 20/20 in 5MP

Panoramic cameras

26

	AXIS M43 Series								AXIS M30 Series		
	AXIS M4348-PLVE	AXIS M4347-PLVE	AXIS M4338-PLVE	AXIS M4337-PLVE	AXIS M4337-SPLVE	AXIS M4318-PLVE	AXIS M4317-PLVE	AXIS M4318-PLR	AXIS M4317-PLR	AXIS M3077-PLVE	AXIS M3057-PLR Mk II
											
Max. video resolution	3536x3536 (12.5 MP)	2464x2464 (6 MP)	3536x3536 (12.5 MP)	2464x2464 (6 MP)	2464x2464 (6 MP)	2992x2992 (12 MP)	2160x2160 (6 MP)	2992x2992 (12 MP)	2160x2160 (6 MP)	2016x2016 (6 MP)	2048x2048 (6 MP)
Sensor size/Lens/ Horizontal field of view	1/1.6" 1.7 mm, F2 185°	1/1.6" 1.7 mm, F2 185°	1/1.6" 1.7 mm, F2 185°	1/1.6" 1.7 mm, F2 185°	1/1.6" 1.7 mm, F2 185°	1/2.3" 1.2 mm, F2.2 182°	1/1.8" 1.1 mm, F2.2 182°	1/2.3" 1.2 mm, F2.2 182°	1/1.8" 1.1 mm, F2.2 182°	1/1.8" 1.6 mm, F2.0, 183°	1/1.8" 1.56 mm, F2.0 185°
Min. illumination (lux) Color/B&W	0.08/0.00	0.08/0.00	0.08/0.00	0.08/0.00	0.08/0.00	0.19/0.00	0.16/0.00	0.19/0.00	0.16/0.00	0.16/0.00	0.16/0.00
Max. frames per second	50/60*	50/60	50/60*	50/60	50/60	25/30	50/60	25/30	50/60	25/30	50/60
Audio support/ Built-in mic	✓ / ✓	✓ / ✓	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / ✓	- / -
Compute capabilities	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	-	-
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics AXIS Audio analytics	AXIS Object Analytics AXIS Audio analytics	AXIS Object Analytics	AXIS Object Analytics	AXIS Object Analytics	AXIS Object Analytics AXIS Video Motion Detection AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Scene Metadata	AXIS Object Analytics AXIS Video Motion Detection AXIS Scene Metadata	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 4	PoE Class 4	PoE Class 4	PoE Class 4	PoE Class 4	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3
In-/output ports	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1
Operating temperature	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 55 °C (-40 °F to 131 °F)
Approvals	IP66/NEMA 4X, IK10	IP66/NEMA 4X, IK10	IP66/NEMA 4X, IK10	IP66/NEMA 4X, IK10	IP66/IP67/IP68/NEMA 4X, IK10	IP66/NEMA 4X, IK10	IP66/NEMA 4X, IK10	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X, IK10	IP66/NEMA 4X, IK10
WDR/Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder	Forensic WDR/ Lightfinder
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -
Optimized IR/Built-in IR	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
Secure Boot/Signed video/Secure keystore	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / - / ✓	✓ / - / ✓
Sustainability	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free	PVC free
Highlighted features	Dewarped views Directional audio detection	Dewarped views Directional audio detection	Dewarped views	Dewarped views	Dewarped views	Dewarped views	Dewarped views	Dewarped views	Dewarped views	Dewarped views	Dewarped views

* 50/60 with camera in 8 MP (2880x2880)

AXIS Q87

AXIS Q8752-E Mk II



Max. video resolution	Visual: 1920x1080 (2.1 MP) Thermal: 640x480
Sensor size/Lens/ Horizontal field of view	Visual: 1/2.8" progressive scan CMOS 4.3 - 137.6 mm, F1.4 - 4.0 58.5° - 2.4° Thermal: Uncooled microbolometer Athermalized 35 mm, F1.2, 17° Athermalized 35-105 mm, F1.6, 18° -6° (Zoom)
Min. illumination (lux) Color/B&W	Visual: 0.1/0.02
Max. frames per second	Visual: 50/60 Thermal: 8.3/30 ¹
Pan/Tilt	360° endless / -90° to 45° -45° to 90° (inverted configuration)
Optical zoom	Visual: 32 Thermal: 3 (Zoom)
Sensitivity	Thermal: NETD < 50 mK
Compute capabilities	Deep learning processing unit
Included video analytics (for Axis video analytics, see page 4)	Advanced gatekeeper Audio detection AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm
Power	56 V AC/DC
In-/output ports	4
Operating temperature	-40 °C to 60 °C (-40 °F to 140 °F)
Approvals	IP66/NEMA 4X, IK10
WDR/Lightfinder	Visual: Forensic WDR/Lightfinder 2.0
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / -
Optimized IR/Built-in IR	- / -
Secure Boot/Signed video/ Secure keystore	✓ / ✓ / FIPS 140-2 Level 2
Sustainability	PVC free
Highlighted features	Electronic image stabilization RJ45 and SFP interfaces Thermal palettes, Built-in wiper Visual channel: Focus recall



AXIS Q6411-LE Bispectral PTZ Camera

AI-powered, all-in-one thermal and visual camera

Read more on: www.axis.com

¹. Up to 30 fps within EU, Norway, Switzerland, Canada, USA, Japan, Australia, New Zealand. Up to 8.3 fps in other countries. Frame rate above 9 fps may be subject to export control regulations

Pan/tilt/zoom cameras

	AXIS Q64 Series		AXIS Q63 Series			AXIS Q62
	AXIS Q6411-LE 	AXIS Q6358-LE 	AXIS Q6355-LE 	AXIS Q6325-LE 	AXIS Q6300-E 	AXIS Q6225-LE 
Max. video resolution	Visual: 1920x1080 (2 MP) Thermal: Sensor is 384x288 Image can be scaled up to 768x576	3840x2160 (8 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	2592x1944 (20.4 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	Visual: 1/2", 6.91 - 214.64 mm, F1.4 - 4.0, 59.6° - 1.0° Thermal: Uncooled microbolometer Athermalized lens 7 mm, F1.18, 55°	1/2" 6.91 - 214.64 mm, F1.36 - 4.6 58.5° - 2.3°	1/2" 6.91 - 214.64 mm, F1.36 - 4.6 60.6° - 2.0°	1/2" 6.91 - 214.64 mm, F1.36 - 4.6 60.6° - 2.0°	1/2" 3.7 mm, F3.7 360°	1/2" 6.91 - 214.64 mm, F1.36 - 4.6 63.8° - 2.2°
Min. illumination (lux) Color/B&W	0.06/0.001	0.11/0.001	0.06/0.001	0.09/0.002	0.06/0.03	0.05/0.001
Max. frames per second	Visual: 50/60* Thermal: 8.3/301	50/60	50/60	50/60	25/30	50/60
Optical zoom	31	31	31	31	-	31
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -
Compute capabilities	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit	-
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics Active Gatekeeper Autotracking AXIS Video Motion Detection AXIS Scene Metadata	AXIS Object Analytics Active Gatekeeper Autotracking AXIS Video Motion Detection AXIS Scene Metadata	AXIS Object Analytics Active Gatekeeper Autotracking AXIS Video Motion Detection AXIS Scene Metadata	AXIS Object Analytics Active Gatekeeper Autotracking AXIS Video Motion Detection AXIS Scene Metadata	AXIS Object Analytics Autopilot AXIS Video Motion Detection	AXIS Object Analytics Active Gatekeeper Autotracking AXIS Video Motion Detection AXIS Scene Metadata
Power	PoE Class 6, PoE Class 4	PoE Class 6 SFP midspan included	PoE Class 6 SFP midspan included	PoE Class 6, PoE Class 4	PoE Class 8 PoE Class 4	PoE Class 8 SFP midspan included
In-/output ports	3	3	3	3	- / -	3
Operating temperature	-40 °C to 55 °C (-40 °F to 131 °F)	-50 °C to 55 °C (-58 °F to 131 °F)	-50 °C to 55 °C (-58 °F to 131 °F)	-50 °C to 55 °C (-58 °F to 131 °F)	-50 °C to 55 °C (-58 °F to 131 °F)	-50 °C to 55 °C (-58 °F to 131 °F)
Approvals	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/IP67/NEMA 4X, IK10	IP66/NEMA 4X, IK10	IP66/IP68/NEMA 4X, IK10, MIL-STD-810G
WDR/Lightfinder	WDR/Lightfinder 2.0	WDR/Lightfinder 2.0	WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -
OptimizedIR/Built-in IR	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	- / -	✓ / ✓
Secure Boot/Signed video/Secure keystore	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-2 Level 2
Sustainability	PVC free, BFR/CFR free 10% recycled plastics, 3% bio-plastics	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free 18% recycled plastics, 5% bio-plastics	PVC free, BFR/CFR free	PVC free
Highlighted features	Electronic image stabilization Thermal palettes Orientation aid, Shock detection Low power mode, Power profiles	Electronic image stabilization Orientation aid, Shock detection, Laser focus Low power mode, AXIS Live privacy shield Support for AXIS Licenc plate verifier	Electronic image stabilization Orientation aid, Shock detection, Laser focus Low power mode, AXIS Live privacy shield Support for AXIS Licenc plate verifier	Electronic image stabilization Orientation aid, Shock detection Low power mode, AXIS Live privacy shield Support for AXIS Licenc plate verifier	Directional audio detection Low power mode, Exchangeable M14 lenses Integration with AXIS Q63/P56-E PTZ	Electronic image stabilization Built-in wiper Orientation aid, Shock detection Low power mode

*Up to 30 fps within EU, Norway, Canada, USA, Japan, Australia, New Zealand. Up to 8.3 pfs in other countries. Fram rate above 9 fps may be subjected to export control regulations.

Pan/tilt/zoom cameras

	AXIS Q60 Series		
	AXIS Q6086-E 	AXIS Q6088-E 	AXIS Q6020-E 
Max. video resolution	2688x1512 (4 MP)	3840x2160 (8 MP)	2592x1944 (20.4 MP)
Sensor size/Lens/ Horizontal field of view	1/1.2" 6.64 - 225.5 mm, F1.7 - 5.1 61.5° - 2.0°	1/2" 6.64 - 225.5 mm, F1.7 - 5.1 60.8° - 2.0°	1/2" 3.7mm, F3.7 360°
Min. illumination (lux) Color/B&W	0.07/0.005	0.07/0.05	0.06/0.03
Max. frames per second	50/60	50/60	25/30
Optical zoom	34	34	-
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / -
Compute capabilities	Deep learning processing unit	Deep learning processing unit	Deep learning processing unit
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics AXIS Image Health Analytics AXIS Scene Metadata AXIS Video Motion Detection 4	AXIS Object Analytics AXIS Image Health Analytics AXIS Scene Metadata AXIS Video Motion Detection 4	AXIS Object Analytics AXIS Video Motion Detection Autopilot
Power	PoE Class 6, PoE Class 4 SFP midspan included	PoE Class 6, PoE Class 4 SFP midspan included	PoE Class 8 PoE Class 4
In-/output ports	3	3	- / -
Operating temperature	-50 °C to 55 °C (-58 °F to 134 °F)	-50 °C to 50 °C (-58 °F to 122 °F)	-50 °C to 55 °C (-58 °F to 131 °F)
Approvals	IP66/67/NEMA 4X/IK10	IP66/67/NEMA 4X/IK10	IP66/NEMA 4X, IK10
WDR/Lightfinder	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	WDR/Lightfinder 2.0
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓	✓ / ✓ / ✓ / -
OptimizedIR/Built-in IR	- / -	- / -	- / -
Secure Boot/Signed video/Secure keystore	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-3 Level 3
Sustainability	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free
Highlighted features	Electronic image stabilization Laser focus, Shock detection Orientation aid, Low power mode AXIS Live privacy shield	Electronic image stabilization Laser focus, Shock detection Orientation aid, Low power mode AXIS Live privacy shield	Low power mode, Exchangable M14 lenses Integration with AXIS Q60-E PTZ

Pan/tilt/zoom cameras

30

	AXIS V59 Series		AXIS P56 Series		
	AXIS V5938 	AXIS V5925 	AXIS P5676-LE 	AXIS P5655-E 	AXIS P5654-E MkII 
Max. video resolution	3840x2160 (8 MP)	1920x1080 (2.1 MP)	2688x1512 (4 MP)	1920x1080 (2.1 MP)	1280x720 (1 MP) 1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/2.5", 4.4 - 88 mm, F2.0 - 3.8, 70.2° - 4.1°	1/2.8", 4.4 - 132 mm, F1.4 - 4.6 62° - 2.3°	1/2.9, 4.5 - 135 mm, F1.6 - 4.6 57.1° - 2.1°	1/2.8" 4.3 - 137.6 mm, F1.4 - 4.0 58.7° - 2.4°	1/2.8" 4.0 - 84.6 mm, F1.6 - 4.5 77.0° - 3.6°
Min. illumination (lux) Color/B&W	0.7/0.06	1.0/0.03	0.1/0.01	0.1/0.01	0.1/0.01
Max. frames per second	25/30	50/60	50/60	50/60	50/60
Optical zoom	20	30	30	32	21
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / -	✓ / -	- / -
Included video analytics (for Axis video analytics, see page 4)	AXIS Video Motion Detection Active tampering alarm Autotracking	AXIS Video Motion Detection Active tampering alarm Autotracking	AXIS Object Analytics Active Gatekeeper Autotracking AXIS Video Motion Detection AXIS Scene Metadata	AXIS Object Analytics Advanced Gatekeeper Audio detection AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata	AXIS Object Analytics Advanced Gatekeeper AXIS Video Motion Detection Active tampering alarm AXIS Scene Metadata
Power	DC	DC	PoE Class 6, PoE Class 4, AC, DC	PoE Class 4, AC, DC	PoE Class 4
In-/output ports	2	2	4	4	- / -
Operating temperature	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)
Approvals	-	-	IP66/NEMA 4X, IK10	IP66/NEMA 4X, IK10	IP66/NEMA 4X, IK10
WDR/Lightfinder	- / -	- / -	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder 2.0
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -
Optimized IR/Built-in IR	- / -	- / -	✓ / ✓	- / -	- / -
Secure Boot/ Signed video/Secure keystore	✓ / - / -	✓ / - / -	✓ / ✓ / ✓	✓ / - / -	✓ / - / -
Sustainability	-	-	PVC free, bio-plastics	PVC free	PVC free
Highlighted features	UHD 4K 2x Canon XLR3 3G-SDI, HDMI™ CamStreamer 3-month trial included VISCA support, VISCA over IP support	2x Canon XLR3 3G-SDI, HDMI™ CamStreamer 3-month trial included VISCA support, VISCA over IP support	Electronic image stabilization Orientation aid, Spot focus	Electronic image stabilization Focus recall Shock detection, Orientation aid	Electronic image stabilization Focus recall Shock detection, Orientation aid

Pan/tilt/zoom cameras

31

	AXIS M55		AXIS M50 Series			
	AXIS M5526-E 	AXIS M5075-G 	AXIS M5075 	AXIS M5074 	AXIS M5000 	AXIS M5000-G 
Max. video resolution	2688x1512 (4 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1280x720 (1 MP)	PTZ camera: 1920x1080 (2.1 MP) Overview cameras: 2592x1944 (3x 5 MP)	PTZ camera: 1920x1080 (2.1 MP) Overview cameras: 2592x1944 (3x 5 MP)
Sensor size/Horizontal field of view	1/3" 4.7 - 47 mm, F1.6 - 3.0 59.1°-6.5°	1/2.8" 2.2 - 11.0 mm, F1.4 - 2.5 71° - 14°	1/2.8" 2.2 - 11.0 mm, F1.4 - 2.5 71° - 14°	1/2.8" 2.2 - 11.0 mm, F1.4 - 2.5 71° - 14°	PTZ camera: 1/2.8" 4.7 - 47 mm, F1.6 - 3.0, 61.8° - 6.7° Overview cameras: 1/2.8" 2.39 mm, F2.0, 360°	PTZ camera: 1/2.8" 4.7 - 47 mm, F1.6 - 3.0, 61.8° - 6.7° Overview cameras: 1/2.8" 2.39 mm, F2.0, 360°
Min. illumination (lux) Color/B&W	0.20/0.01	0.1/-	0.1/-	0.1/-	PTZ camera: 0.09/0.01 Overview cameras: 0.08/0.03	PTZ camera: 0.09/0.01 Overview cameras: 0.08/0.03
Max. frames per second	50/60	50/60	50/60	50/60	PTZ camera: 25/30 Overview cameras: 12	PTZ camera: 25/30 Overview cameras: 12
Optical zoom	10	5	5	5	10	10
Audio support/ Built-in mic	✓ / -	✓ / ✓	✓ / ✓	✓ / ✓	✓ / -	✓ / -
Compute capabilities	Deep learning processing unit	-	-	-	-	-
Included video analytics (for Axis video analytics, see page 4)	AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm Audio detection, Advanced gatekeeper AXIS Scene Metadata	Audio volume detection Scream detection Removed object detection AXIS Video Motion Detection Active tampering alarm	Audio volume detection Scream detection Removed object detection AXIS Video Motion Detection Active tampering alarm	Audio volume detection Scream detection Removed object detection AXIS Video Motion Detection Active tampering alarm	AXIS Loitering Guard AXIS Video Motion Detection Audio detection Advanced gatekeeper	AXIS Loitering Guard AXIS Video Motion Detection Audio detection Advanced gatekeeper
Power	PoE Class 3, DC	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 4, DC	PoE Class 4, DC
In-/output ports	4	- / -	- / -	- / -	4	4
Operating temperature	-20 °C to 50 °C (-4 °F to 122 °F)	0 °C to 45 °C (32 °F to 113 °F)	0 °C to 45 °C (32 °F to 113 °F)	0 °C to 45 °C (32 °F to 113 °F)	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)
Approvals	IP66	-	-	-	-	-
WDR/Lightfinder	Forensic WDR/Lightfinder 2.0	Forensic WDR / -	Forensic WDR / -	Forensic WDR / -	Forensic Capture / -	Forensic Capture / -
Zipstream/ H.264/H.265/AV1	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / -
OptimizedIR/Built-in IR	- / -	- / -	- / -	- / -	- / -	- / -
Secure Boot/ Signed video/Secure keystore	✓ / ✓ / ✓	- / - / -	- / - / -	- / - / -	✓ / ✓ / ✓	✓ / ✓ / ✓
Sustainability	PVC free, BFR/CFR-free Renewable carbon-based plastics content: 16% (recycled)	PVC free	PVC free	PVC free	PVC free, BFR/CFR free	PVC free, BFR/CFR free
Highlighted features	Focus recall	Wireless I/O with Z-Wave Plus®	-	-	Shock detection	Wireless I/O with Z-Wave Plus® Shock detection


Thermal cameras

32

	AXIS Q28 Series		AXIS Q21 Series		AXIS Q19 Series		
	AXIS Q2802-E 	AXIS Q2112-E 	AXIS Q2111-E 	AXIS Q2101-TE 	AXIS Q1972-E 	AXIS Q1971-E 	AXIS Q1961-TE 
Max. video resolution	Visual: 3840x2160 (8.3 MP) Thermal: 640x480	640x480	384x288	384x288	640x480	384x288	384x288
Sensor size/ Lens/ Horizontal field of view	Visual: 8 MP: 1x 1/1.2" 5.85 mm F1.5, 113.8° Thermal: Uncooled microbolometer Athermalized lens 10 mm, F1.17, 63° 19 mm, F1.0, 31° 25 mm, F1.0, 24° 35 mm, F1.0, 14°	Uncooled microbolometer Athermalized lens 10 mm, F1.2, 63° 19 mm, F1.0, 31° 25 mm, F1.0, 24.1° 35 mm, F1.2, 17° 60 mm, F1.2, 10°	Uncooled microbolometer Athermalized lens 60 mm, F1.2, 6.2°	Uncooled microbolometer Athermalized lens 7 mm, F1.18, 55° 13 mm, F1.0, 28° 19 mm, F1.23, 19.4°	Uncooled microbolometer Athermalized lens 10 mm, F1.2, 63° 19 mm, F1.0, 31° 25 mm, F1.0, 24.1° 35 mm, F1.2, 17°	Uncooled microbolometer Athermalized lens 7 mm, F1.18, 55° 13 mm, F1.0, 29° 19 mm, F1.23, 19° 25 mm, F1.0, 15° 35 mm, F1.14, 10.5°	Uncooled microbolometer Athermalized lens 7 mm, F1.18, 55° 13 mm, F1.0, 28°
Max. frames per second	8.3/30 ¹	8.3/30 ¹	8.3/30 ¹	8.3/30 ¹	8.3/30 ¹	8.3/30 ¹	8.3/30 ¹
Object temperature range	-	-	-	-40 °C to 350 °C (-40 °F to 662 °F)	-	-	-40 °C to 350 °C (-40 °F to 662 °F)
Sensitivity	NETD < 20 mK	NETD < 20 mK	NETD < 20 mK	NETD < 40 mK	NETD < 20 mK	NETD < 20 mK	NETD < 40 mK
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -
Included video analytics (for Axis video analytics, see page 4)	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm Audio detection	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm Audio detection	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm Audio detection	AXIS Guard Suite Active tampering alarm Early fire detection Audio detection	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm Audio detection	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm Audio detection	AXIS Guard Suite Active tampering alarm Early fire detection Audio detection
Power	PoE Class 4, DC	PoE Class 3, 12 - 28 V DC	PoE Class 3, 12 - 28 V DC	PoE Class 3, 12 - 28 V DC	PoE Class 3, 12 - 28 V DC	PoE Class 3, 12 - 28 V DC	PoE Class 3, 12 - 28 V DC
In-/output ports	2/2	4	4	4	1/1	1/1	1/1
RS485/RS422 for pan/tilt control	✓	✓	✓	✓	-	-	-
Operating temperature	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)
Approvals	IP66/IP67/NEMA 4X, IK10 ²	IP66/IP67/NEMA 4X, IK10 ²	IP66/IP67/NEMA 4X, IK10 ²	IP66/IP67/NEMA 4X, IK10 ²	IP66/IP67/NEMA 4X, IK10 ²	IP66/IP67/NEMA 4X, IK10 ²	IP66/IP67/NEMA 4X, IK10 ²
Zipstream/H.264/H.265	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Secure Boot/ Signed video/Secure keystore	✓ / ✓ / FIPS 140-3 Level 3	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2
Sustainability	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free
Highlighted features	Electronic image stabilization Visual: Edge-to-edge technology Shock detection Low power mode Dynamic power mode Thermal: Thermal palettes	Electronic image stabilization Thermal palettes	Electronic image stabilization Thermal palettes	Thermometric guard tour Isothermal palettes Thermal palettes Spot temperature reading Polygonal detection areas Electronic image stabilization	Electronic image stabilization Thermal palettes	Electronic image stabilization Thermal palettes	Isothermal palettes Thermal palettes Spot temperature reading Polygonal detection areas Electronic image stabilization

1. Up to 30 fps within EU, Norway, Switzerland, Canada, USA, Japan, Australia, New Zealand. Up to 8.3 fps in other countries. Frame rate above 9 fps may be subject to export control regulations 2. Excluding front window

Explosion-protected devices

	Zone 1/Division 1 - cameras			
	ExCam XPT Q6075 	ExCam XF P3807 	AXIS XFQ1656 	ExCam XF Q1785 
Max. video resolution	1920x1080 (2.1 MP)	4320x1920 (8.3 MP)	2688x1512 (4 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/2.8" 4.25 - 170 mm F1.6 - 4.95, 65.1° - 2.0°	4 x 1/2.9" 3,2mm, F2.0 180°	1/1.8", i-CS lens 3.9 - 10 mm, F1.5 120° - 47°	1/2.8" 4.3 - 137 mm, F1.4 - 4.0 60° - 2.3°
Min. illumination (lux) Color/B&W	0.1/0.002	0.17/0.005	0.05/0.01	0.16/0.03
Max. frames per second	50/60	25/30	50/60	25/30
Optical zoom	40	-	~2.5x zoom	-
Included video analytics (for Axis video analytics, see page 4)	AXIS Guard Suite Active Gatekeeper Autotracking 2 AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	Smoke alert, Audio detection AXIS Object Analytics AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 4 and 24 V DC for additional heater SFP midspan included	PoE Class 3	PoE Class 6 100-240 V AC	PoE Class 3 and 24 V DC for additional heater
In-/output ports	- / -	- / -	4	- / -
Operating temperature	-50 °C to 50 °C (-58 °F to 122 °F)	-50 °C to 50 °C (-58 °F to 122 °F)	With PoE: -40°C to 60°C (-40°F to 140°F) With AC/SFP: -40°C to 55°C (-40°F to 131°F)	-60 °C to 60 °C (-76 °F to 140 °F)
Approvals	IP66/IP67/IP68	IP66/IP67/IP68	IP66/IP67/IP68	IP68
WDR/Lightfinder	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder	Forensic WDR/Lightfinder 2.0	Forensic WDR/Lightfinder
Zipstream/H.264/H.265	✓ / ✓ / ✓	✓ / ✓ / -	✓ / ✓ / ✓	✓ / ✓ / -
Certifications	ATEX, IECEx, IA, EAC, PESO	ATEX, IECEx, INMETRO, EAC, PESO	ATEX, IECEx, INMETRO, IA, KCs, PESO, cMETus, JPEX, OSHA(TW)	ATEX, IECEx, IA, EAC, PESO
Secure Boot/ Signed video/Secure keystore	✓ / ✓ / FIPS 140-2 Level 2	- / - / -	✓ / ✓ / FIPS 140-2 Level 2	- / - / -
Sustainability	-	-	-	-
Highlighted features	Orientation aid Automatic defog Electronic image stabilization Focus recall, Shock detection	1 IP address Vertical FoV 90°	Electronic image stabilization Built-in wiper Shock detection Edge-to-edge technology	Electronic image stabilization Built-in wiper Shock detection

Explosion-protected devices

Zone 1/Division 1 - speakers		Zone 2/Division 2 - cameras	
	AXIS XC1311 	AXIS P1468-XLE 	AXIS Q1961-XTE 
Voice announcements	✓	Max. video resolution	3840x2160 (4K)
Onboard audio clips	✓	Sensor size/Lens/ Horizontal field of view	1/1.2" 6.2 - 12.9 mm, F1.6 - 2.9 108° - 49°
Power	PoE Class 3	Min. illumination (lux)Color/B&W	0.07/0.00
Max sound pressure level	>110 dB	Max. frames per second	25/30
Frequency response	400 Hz - 5.5 kHz	Optical zoom	2x
Coverage pattern	54°	Included video analytics (for Axis video analytics, see page 4)	Smoke Alert AXIS Object Analytics (with PPE monitoring) AXIS Video Motion Detection AXIS Image Health Analytics AXIS Live Privacy Shield AXIS Scene Metadata
In-/output ports	2	Power	PoE Class 3, 12 - 28 V DC
Operating temperature	-40 °C to 60 °C (-40 °F to 140 °F)	In-/output ports	1/1
Built-in mic	Only for remote health testing	Operating temperature	-40 °C to 60 °C (-40 °F to 140 °F)
Certifications	ATEX, IECEx, UL	Approvals	IP66/IP67/NEMA 250 Type 4X
Secure Boot/Secure keystore	✓ / ✓	WDR/Lightfinder	Forensic WDR/Lightfinder 2.0
Approvals	IP66/NEMA 4X	Zipstream/H.264/H.265	✓ / ✓ / ✓
Sustainability	PVC free	Certifications	ATEX, IECEx, cULus INMETRO, PESO, JPEX, KCs, OSHA (TW)
Highlighted features	AXIS Audio Manager Edge included VAPIX, ACAP, SIP	Secure Boot/ Signed video/Secure keystore	✓ / ✓ / ✓
		Sustainability	PVC free, BFR/CFR free
		Highlighted features	IK10 Shock detection Edge-to-edge technology
			Isothermal palettes Thermal palettes Spot temperature reading Polygonal detection areas Electronic image stabilization

1. Up to 30 fps within EU, Norway, Switzerland, Canada, USA, Japan, Australia, New Zealand. Up to 8.3 fps in other countries. Frame rate above 9 fps may be subject to export control regulations.

Canon network cameras


35

	VB-M46	VB-H47
	Only available in EMEA, US and Canada 	Only available in EMEA, US and Canada 
Max. video resolution (pixels)	1280x960 (1.3 MP)	1920x1080 (2.1 MP)
Horizontal field of view	62.4° - 3.2°	62.4° - 3.2°
Image sensor	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"
Lens	4.7 - 94 mm F1.6 - F3.5 Autofocus 20x optical, 16x digital zoom	4.7 - 94 mm F1.6 - F3.5 Autofocus 20x optical, 16x digital zoom
Min. illumination (lux)	0.02 (Color) 0.003 (B/W)	0.02 (Color) 0.003 (B/W)
Frames per second	30	30
Pan/Tilt/Zoom	64 presets 340° pan 100° (-90° to +10°) tilt	64 presets 340° pan 100° (-90° to +10°) tilt
Audio support	Two-way	Two-way
Alarm in-/outputs	2/2	2/2
Analytics	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Face Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Face Detection
Power	AC/DC PoE IEEE 802.3at Type1	AC/DC PoE IEEE 802.3at Type1
Outdoor ready	-	-
H.264/H.265	✓ / ✓	✓ / ✓
Other	Motion Adaptive Noise Reduction Area-specific Data Size Reduction (ADSR) ONVIF Profile S & G & T	Motion Adaptive Noise Reduction Area-specific Data Size Reduction (ADSR) ONVIF Profile S & G & T

For a complete list of Canon products, visit www.axis.com/support/canon-product-support

Radar devices

36

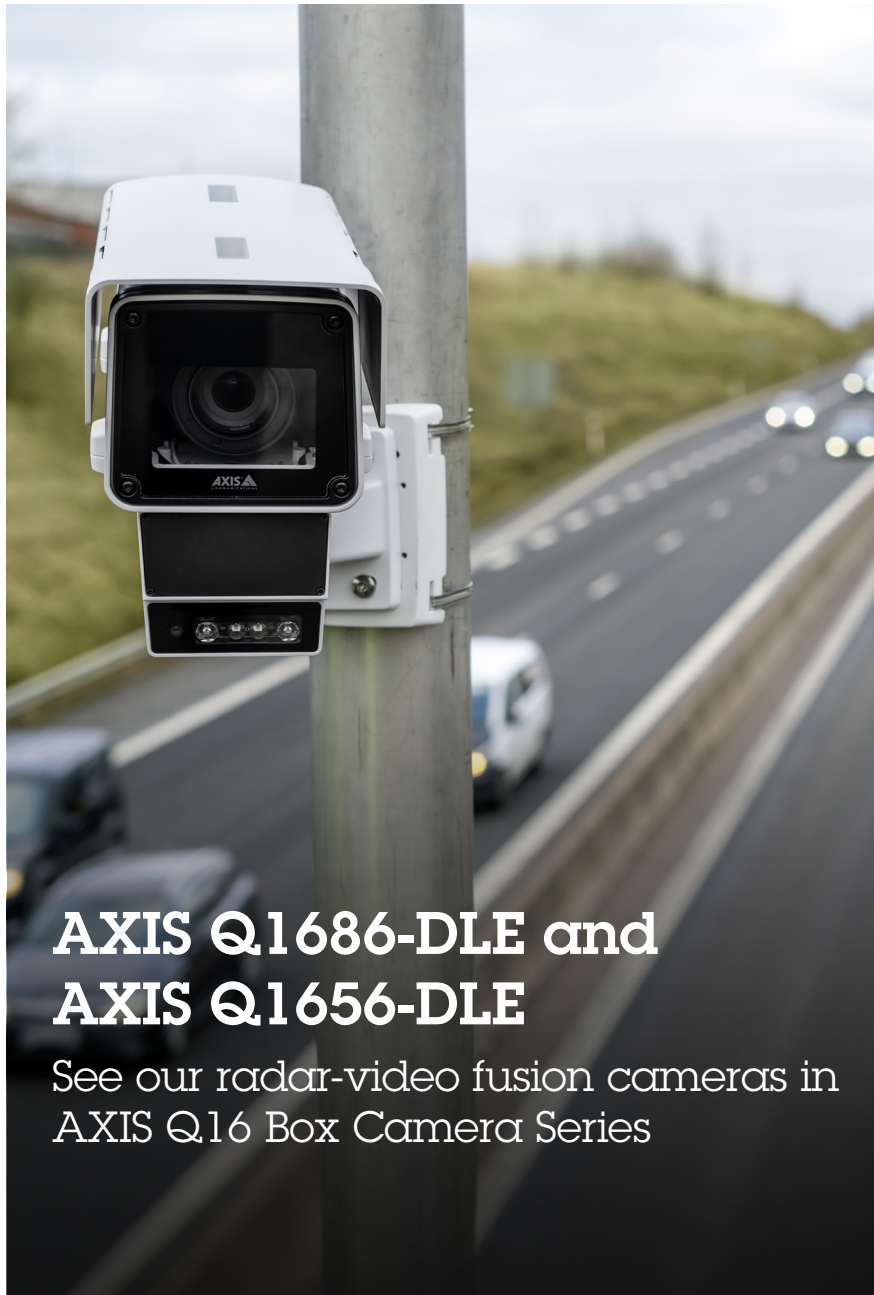

AXIS Q1686-DLE and AXIS Q1656-DLE

See our radar-video fusion cameras in
AXIS Q16 Box Camera Series

Radars

	AXIS D2123-VE	AXIS D2122-VE	AXIS D2210-VE Security	AXIS D2110-VE
				
Radar frequency range	24.05-25.25 GHz	24.05-25.25 GHz	61-61.5 GHz	24.05-25.25 GHz
Horizontal field of detection	270°	180°	95°	180°
Human recognition zone	30 000 m ² (320 000 sq ft)	20 000 m ² (215 000 sq ft)	2 700 m ² (29 000 sq ft)	5 600 m ² (61 000 sq ft)
Area surveillance/traffic monitoring	✓ / -	✓ / -	✓ / ✓	✓ / ✓
Radial speed in area monitoring/road monitoring	80 km/h (50 mph) / -	80 km/h (50 mph) / -	55 km/h (34 mph) / 200 km/h (125 mph)	55 km/h (34 mph) / 105 km/h (65 mph)
Angle accuracy	<0.5°	<0.5°	1°	1°
Speed accuracy	+/- 2 km/h (1.25 mph)	+/- 2 km/h (1.25 mph)	+/- 2 km/h (1.25 mph)	+/- 2 km/h (1.25 mph)
Power	PoE Class 4, AC PoE Class 8 (with PoE out)	PoE Class 4, AC PoE Class 8 (with PoE out)	PoE Class 4, AC, DC PoE Class 6 (with PoE out)	PoE Class 4, AC, DC PoE Class 5 (with PoE out)
Dynamic led strip	✓	✓	✓	-
Sustainability	PVC free, BFR/CFR free 69% bio-plastics	PVC free, BFR/CFR free 69% bio-plastics	PVC free, BFR/CFR free	PVC free
Coexistence, number of max radars	12	12	8	6
Coexistence zone size	500 m (1640 ft)	500 m (1640 ft)	350 m (1148 ft)	350 m (1148 ft)
Operating temperature	-40° C to 60° C (40° F to 140° F)	-40° C to 60° C (40° F to 140° F)	-40° C to 60° C (40° F to 140° F)	-40° C to 60° C (40° F to 140° F)
Approvals	IP66/IP67/NEMA 4X/IK10	IP66/IP67/NEMA 4X/IK10	IP66/IP67/NEMA 4X/IK10	IP66/NEMA 4X/IK08
Secure Boot/Signed video/ Secure keystore	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	✓ / ✓ / FIPS 140-2 Level 2	- / - / -
Highlighted features	Possibility for radar-video fusion with selected PTZ cameras PTZ autotracking Edge-to-edge technology	Possibility for radar-video fusion with selected PTZ cameras PTZ autotracking Edge-to-edge technology	PTZ autotracking Edge-to-edge technology	PTZ autotracking Edge-to-edge technology

System devices

Network switches

	AXIS T8524	AXIS T8516	AXIS T8508	AXIS T8504-E	AXIS T8504-R	AXIS D8308	AXIS D8248	AXIS D8208-R	AXIS D8004
									
Power over Ethernet+ (PoE+) Port Count	24	16	8	4 (2x 60 W)	4 (4x 60 W)	-	48 (8x 90 W)	8 (8x 90 W)	4
Power over Ethernet (PoE) total output power	370 W	240 W	130 W	150 W	240 W	-	740 W	480 W	60 W
SPF Port Count	2	2	2	1	2	10	4	2	-
Gigabit Ethernet	✓	✓	✓	✓	✓	✓	✓	✓	-
Rack mount	✓	✓	With AXIS T85 Rack Mount Kit A	-	-	-	✓	-	-
Outdoor ready	-	-	-	✓	-	-	-	-	-
Sustainability	PVC free	PVC free	PVC free	PVC free	PVC free	PVC free	PVC free	PVC free	PVC free



I/O devices

Enhanced security with wired sensors for both indoor and outdoor

AXIS T6112 Mk II Audio I/O Interface
AXIS T6101 Mk II Audio I/O Interface
AXIS A9188 Network I/O Relay Module
AXIS A9210 Network I/O Relay Module
AXIS A9910 Relay Expansion Module



Decoders

Make it possible to display multiple camera video streams to a public view monitor

AXIS D1110 Video Decoder 4K



Audio/Visual alerters

Signal and alarm with the power of light and sound

AXIS D4200-VE Network Strobe Speaker
AXIS D4100-VE Mk II Network Strobe Siren

System devices

	Environmental sensors	
	AXIS D6310 	AXIS D6210 
Type	Standalone	Portcast
Parameters	Temperature, Rh, PM, CO2, VOC, NOx, AQI, Humidex, HI	Temperature, Rh, PM, CO2, VOC, NOx, AQI, HI*
Detects	Vaping, smoking	Vaping, smoking
Power	PoE Class 3, PoE Class 4, (with PoE out)	PoE Class 2, 3 or 4
Built-in mic	✓	-
Built-in speaker	✓	-
PIR sensor	✓	-
Power forwarding	✓	-
Included analytics (for Axis analytics, see page 4)	AXIS Audio Analytics	-
Operating temperature	-10 °C to 45 °C (14 °F to 113 °F)	-10 °C to 45 °C (14 °F to 113 °F)
LEDs/colors	4 / Red, green, blue, yellow	1 / Red, green, blue, amber
I/O Ports	1x RS422/RS485 1x I/O 4-pin (25mA)	-
Two-way audio	Half duplex, echo cancellation	-
Zipstream/ H.264/H.265/ AV1	- / ✓ / ✓ / -	- / - / - / -
Secure Boot/ Signed video/Secure keystore	✓ / - / ✓	✓ / - / -
Sustainability	65% bio-plastics	60% recycled plastics
Highlighted features	Microphone with physical on/off switch, Edge-to-edge technology, VAPIX, ACAP, MQTT, AXIS Audio Manager Edge incl.	

*relative humidity, particulate matter, carbon dioxide, volatile organic compounds, nitrogen oxides, air quality index, humidex, heat index

Video encoders

38

	AXIS P73 Series		AXIS M71 Series	
	AXIS P7316 	AXIS P7304 	AXIS M7116 	AXIS M7104 
Max. video resolution	720x480 (NTSC) 720x576 (PAL) TVI, high definition CVI and high definition analog HD (1280x720 and 1920x1080) 4xone channel 4K 13840x2160	720x480 (NTSC) 720x576 (PAL) TVI, high definition CVI and high definition analog HD (1280x720 and 1920x1080) 4xone channel 4K 13840x2160	720x480 (NTSC) 720x576 (PAL)	720x480 (NTSC) 720x576 (PAL)
Max. frames per second	25/30	25/30	25/30	25/30
Video source (BNC composite inputs)	16	4	16	4
Audio support	✓	✓	-	-
Configurable in-/outputs	4	4	- / -	- / -
Product specific analytics	Audio detection AXIS Video Motion Detection Active tampering alarm AXIS Camera Application Platform	Audio detection AXIS Video Motion Detection Active tampering alarm AXIS Camera Application Platform	AXIS Video Motion Detection Active tampering alarm AXIS Camera Application Platform	AXIS Video Motion Detection Active tampering alarm AXIS Camera Application Platform
Pan/tilt/zoom support	✓	✓	✓	✓
Power	Power supply included	PoE, DC	Power supply included	PoE, DC
Serial connectors	RS422/RS485	RS422/RS485	RS422/RS485	RS422/RS485
Type	Standalone, Rackmount	Standalone	Standalone, Rackmount	Standalone
Highlighted features	HD Analog support up to 4K	HD Analog support up to 4K	-	-
Sustainability	PVC free	PVC free	PVC free	PVC free

Management software

39

AXIS Camera Station Edge

Camera-to-cloud video management

Easily manage your video surveillance via the cloud. View live video, search timelines, and export recordings. Receive realtime alerts anywhere, anytime. Minimal maintenance required, with continuous updates.

Licenses included with all Axis devices. Simply insert an SD card or use an AXIS S30/S40 Recorder for a complete recording solution. Easily add new sites and devices, with no manual configuration needed.

Out-of-the-box security and full system encryption keep you secure.

www.axis.com/products/axis-camera-station-edge

AXIS Camera Station Pro

Powerful and flexible video management and access control

Verified to work smoothly with Axis IP products and third-party cameras, this feature-rich VMS combines video and access control for efficient security. Manage your system on your private network with optional cloud connectivity. The intuitive interface includes live view, data insight dashboard, replay, smart search, export, video redaction for protection of third-party privacy, and a powerful action rule engine

www.axis.com/products/axis-camera-station-pro

Video Management Software		
	AXIS Camera Station Edge	AXIS Camera Station Pro
		
General		
Product compatibility	6.50 when used together with AXIS S30/S40 Recorders, otherwise 8.40	Axis current portfolio, third-party devices
Supported OS	Windows, iOS, Android	Windows, iOS, Android
Licenses	-	Licensed
Web client	✓	✓
Multisite support	✓	✓
Live view	Live view of up to 36 cameras in full screen, panoramic view, Axis Corridor Format, camera sequence, digital PTZ, dewarp	Flexible live view configuration, support for prerecorded videos, Axis corridor format, camera sequence, digital PTZ, dewarp, door view, multiple monitors, hot spot, site map, web page, PTZ Control integration, timeline visualization with date and time, Axis data insights dashboard
Audio streaming	Two way audio streaming, full duplex for Axis network door station calls, half duplex for other Axis devices, echo cancellation and noise reduction	Two way audio streaming, full duplex for Axis devices, one way for third party cameras, echo cancellation and noise reduction
Event management		
Event triggers	Events triggered by AXIS Object Analytics video motion detection, AXIS Guard Suite, and I/O	Various triggers incl. motion detection, active tampering alarm, system event and error, input/output, action button, AXIS Secure Entry events, external HTTPS and device events, including AXIS Object Analytics, applications from Axis and third-parties
Event action	Record, push notifications	Record, visual notification, push notification to mobile devices, audible alert, switch to camera/view Go to PTZ preset, email, alarm procedure, external I/O acknowledgement of alarms, HTTP notification
Security		
Axis Secure Remote Access	✓	✓
Event log	✓	✓
Investigation and export		
Export	Single images in jpeg, video sequences MKV or MP4, Installation-free stand alone player included, Digital signature on exported recordings	Single images in jpeg, MP4 or MKV, video sequences ASF, Installation-free stand alone player included, digital signature on exported recordings, manual or scheduled export
Play back	Play back speed up to 8x, frame by frame, search for recordings based on camera, date and time via timeline visualization and video scrubbing	Search for recordings based on camera, date and timeline visualization, smart search including similarity search, video scrubbing, bookmarks, locking of prioritized recordings Up to 64x or frame by frame Up to 36 cameras synchronized playback
AXIS Camera Station Secure Entry		
Access control	-	Configuration: Cardholder with photo, support for Card, PIN and Duress PIN, QR code, license plate, cardholder groups, schedule door unlock, copy door configuration, card formats, identification method Management: Qualified for 10.000 cardholders, multi-server, access rules, zones, schedules, access verification, remote door control, access control event log with video

Management software

40

Device management software

	AXIS Device Manager 	AXIS Device Manager Edge 	AXIS Device Manager Extend 
System requirements			
Product compatibility	Device software version 6.50 or later	Device software version 6.50 or later	Device software version 6.50 or later
Client support	Windows	Windows, My Systems web portal	Windows, My Systems web portal
Deployment and management model	Local	Hybrid-cloud	Hybrid-cloud
Multisite system	✓	Site-by-site management	✓
System administration			
Licenses	-	-	✓
Organization management	Uses Windows local account, AD	Uses Identity and access management (IAM) in My Systems	Uses Identity and access management (IAM) in My Systems
User management	Add and remove administrators from AD	Invite and remove users. Manage roles.	Invite and remove users. Manage roles.
Device management			
System inventory overview and status	Device inventory	Device inventory and local dashboard with device status	Device inventory and global dashboard with device status
Network onboarding	To local server	To cloud	To cloud
Hardening	TLS in bulk and local configuration	Via device's web interface	Via device's web interface + Policies for automatic enforcement of hardening
Configuration	Per device and in bulk	Per device via encrypted tunnel to the device's web interface	Per device via encrypted tunnel to the device's web interface plus basic configuration wizard
Device software management	Individual and in bulk (in serial or in parallel)	Per device or in bulk (in serial or in parallel) per server with optional scheduling	Per device or in bulk (in serial or in parallel) with holistic access to all devices and with optional scheduling
Certificate management	✓	-	-
ACAP management	Installation and licensing in bulk and configuration per device	Installation and configuration per device via secure remote connection	Installation and configuration per device via secure remote connection plus basic configuration wizard for maintenance of selected free Axis applications
Factory default	In bulk	Via device's web interface	Via device's web interface
Backup and restore settings	Via configuration file or restore point	-	-
Warranty, product discontinuation and end-of-support information	With optional internet connection	✓	✓
Logs	System	Task	Task

Device management software

Lifecycle management for your Axis products

Whether you're running an on-premises, cloud-based, or hybrid system, Axis offers a device management software that makes it easy to protect and manage your devices throughout the lifecycle.

Audio management software

Manage and control your audio system efficiently regardless of its size and complexity.

Visit [axis.com](https://www.axis.com) or read more on page 50.

Access control management software

Access control management for every need.

Visit [axis.com](https://www.axis.com) or read more on page 52.

Body worn management software

Software and services for your bodyworn system.

Visit [axis.com](https://www.axis.com) or read more on page 46.

Video recorders

41

	AXIS S40	AXIS S30 Series		AXIS S22 Mk II Series			AXIS S21
	AXIS S4000	AXIS S3016	AXIS S3008 MkII	AXIS S2224 Mk II	AXIS S2216 Mk II	AXIS S2212 MkII	AXIS S2108
							
AXIS Camera Station Pro Core Device NVR Licenses/ AXIS Audio Manager Pro Licenses	0 / 0	0 / 0	0 / 0	24 / 10	16 / 10	12 / 10	8 / 10
Supported RAID levels Default RAID level	0, 1, 5, 6, 10 Default: 5	0, 1, 5, 6, 10 Default: 5	-	0, 1, 10 (No RAID by default)	0, 1, 10 (No RAID by default)	Not supported	Not supported
Recording storage	8 / 16 / 32 TB	8 / 16 / 32 TB	2 / 4 / 8 TB	12 TB (2x6 TB)	8 TB (2x4 TB)	6 TB (1x6 TB)	4 TB (1x4 TB)
Operating system	AXIS OS	AXIS OS	AXIS OS	Microsoft® Windows® 11 IoT Enterprise LTSC 2024	Microsoft® Windows® 11 IoT Enterprise LTSC 2024	Microsoft® Windows® 11 IoT Enterprise LTSC 2024	Microsoft® Windows® 11 IoT Enterprise LTSC 2024
Validated video streams	-	-	-	Live view*: 1 stream x 4K at 30 fps 4 split x 1080p at 30 fps 9 split x 720p at 30 fps 16+ split x 360p at 15 fps Up to two 4K monitors, with only one at 30 fps. Playback: Same splits as live view on one monitor only.	Live view*: 1 stream x 4K at 30 fps 4 split x 1080p at 30 fps 9 split x 720p at 30 fps 16+ split x 360p at 15 fps Up to two 4K monitors, with only one at 30 fps. Playback: Same splits as live view on one monitor only.	Live view*: 1 stream x 4K at 30 fps 4 split x 1080p at 30 fps 9 split x 720p at 30 fps 16+ split x 360p at 15 fps Up to two 4K monitors, with only one at 30 fps. Playback: Same splits as live view on one monitor only.	Live view*: 1 stream x 4K at 30 fps 4 split x 1080p at 30 fps 9 split x 720p at 30 fps 16+ split x 360p at 15 fps Up to two 4K monitors, with only one at 30 fps. Playback: Same splits as live view on one monitor only.
Validated recording bitrate and doors	Up to 16 video channels 256 Mbit/s	Up to 16 video channels 256 Mbit/s	Up to 8 video channels 160 Mbit/s	Qualified for 48 doors and 24 video channels with a total recording bitrate up to 384 Mbps. Up to 1,000 doors with access control only.	Qualified for 32 doors and 16 video channels with a total recording bitrate up to 256 Mbps. Up to 1,000 doors with access control only.	Qualified for 24 doors and 12 video channels with a total recording bitrate up to 192 Mbps. Up to 1,000 doors with access control only.	Qualified for 16 doors and 8 video channels with a total recording bitrate up to 128 Mbps. Up to 1,000 doors with access control only.
Redundant power supply	-	-	-	-	-	-	-
Network connectors	Rear side: 1x AUX RJ45 1 Gbps 1x LAN RJ45 1 Gbps 1x LAN SFP 1 Gbps	Rear side: 16x PoE RJ45 1 Gbps 1x LAN RJ45 2.5 Gbps 1x LAN SFP 1 Gbps 1x AUX RJ45 2.5 Gbps	Rear side: 8x PoE ports 100 Mbps Uplinks: 1x uplink 1 Gbps	Rear side Switch: 24x PoE RJ45 1 Gbps 1x SFP 1 Gbps 1x RJ45 1 Gbps Rear side Server: 1x RJ45 1 Gbps	Rear side Switch: 16x PoE RJ45 1 Gbps 1x SFP 1 Gbps 1x RJ45 1 Gbps Rear side Server: 1x RJ45 1 Gbps	Rear side Switch: 12x PoE RJ45 1 Gbps 1x SFP 1 Gbps 1x RJ45 1 Gbps Rear side Server: 1x RJ45 1 Gbps	Rear side switch: 8x PoE ports 100 Mbps 1x RJ45 1Gbps Rear side Server: 1x RJ45 1Gbps
Other connectors	Front side: 1x USB 3.0 Rear side: 1x USB 2.0 1x power connector	Front side: 1x USB 3.0 Rear side: 1x USB 2.0 1x power connector	Side: 1x USB 3.0	Front side: 2x USB 3.2 1x Universal audio jack Rear side Server: 2x USB 2.0 2x HDMI 2.1	Front side: 2x USB 3.2 1x Universal audio jack Rear side Server: 2x USB 2.0 2x HDMI 2.1	Front side: 2x USB 3.2 1x Universal audio jack Rear side Server: 2x USB 2.0 2x HDMI 2.1	Front side: 1x USB 3.0 1x Audio line in 1x Audio line out Rear side Server: 2x USB 2.0 1x HDMI port
Supported monitors	0	0	0	Live view: 2	Live view: 2	Live view: 2	Live view: 2
Mounting accessories	AXIS TS3901 Rail Extensions (not included) Rack rails (included)	AXIS TS3901 Rail Extensions (not included) Rack rails (included)	AXIS TS3001 Recorder Mount (not included) AXIS TW8100 Rack Mount (not included)	Rack rails	Rack rails	AXIS TS2901 Appliance Stand (not included)	AXIS TS2901 Appliance Stand (not included)
Sustainability	PVC Fee	PVC free	PVC free	-	-	PVC free	PVC free

*The listed supported configurations have been tested with hardware decoding turned off.

Video recorders

	AXIS S12 Series						
	AXIS S1296 Rack	AXIS S1264 Rack	AXIS S1232 Rack	AXIS S1232 Tower	AXIS S1228 - AI-Optimized Server	AXIS S1224	AXIS S1216 Tower Mk II
							
AXIS Camera Station Pro Core Device NVR Licenses/ AXIS Audio Manager Pro Licenses	96 /10	64 /10	32 /10	32 /10	28 /10	24 / 10	16/10
Supported RAID levels Default RAID level	0, 1, 5, 6, 10 Default: 6	0, 1, 5, 6, 10 Default: 24 TB: 5, 64 TB: 5, 144 TB: 6	0, 1, 5, 6, 10 Default: 5	0, 1, 5, 6, 10 Default: 5	0, 1 (No RAID by default)	0, 1 (No RAID by default)	0, 1 (No RAID by default)
Recording storage	96 TB: 12x8 TB (80 TB after RAID) 192 TB: 12x16 TB (160 TB after RAID)	24 TB: 6x4 TB (20 TB after RAID) 64 TB: 8x8 TB (56 TB after RAID) 144 TB: 12x12 TB (120 TB after RAID)	16 TB: 4x4 TB (12 TB after RAID) 32 TB: 4x8 TB (24 TB after RAID)	4x8 TB (24 TB after RAID)	12 TB (1x TB)	12 TB (1x TB)	8 TB (1x8 TB)
Operating system	Microsoft® Windows® 11 IoT Enterprise LTSC 2024	Microsoft® Windows® 11 IoT Enterprise LTSC 2024	Microsoft® Windows® 11 IoT Enterprise LTSC 2024	Microsoft® Windows® 11 IoT Enterprise LTSC 2024	Microsoft® Windows® 11 IoT Enterprise LTSC 2024	Microsoft® Windows® 11 IoT Enterprise LTSC 2024	Microsoft® Windows® 11 IoT Enterprise LTSC 2024
Validated video streams	Not intended for local viewing of video. Recommended to use Axis workstations	Not intended for local viewing of video. Recommended to use Axis workstations	Not intended for local viewing of video. Recommended to use Axis workstations	Live view*: 1 stream x 4K at 30 fps 4 split x 1080p at 30 fps 9 split x 720p at 15 fps Up to 16 split x 360p at 15 fps Any combination of the above for maximum two 4K monitors	Not intended for local viewing of video. Recommended to use Axis workstations	Not intended for local viewing of video. Recommended to use Axis workstations	Live view*: 1 stream x 4K at 30 fps 4 split x 1080p at 30 fps 9 split x 1080p at 30 fps** 9 split x 720p at 30 fps 16 split x 450p at 15 fps 25 split x 450p at 15 fps 36 split x 360p at 15 fps Supports any combination for up to two 4K monitors.
Validated recording bitrate and doors	Qualified for 192 doors and 150 video channels with a total recording bitrate up to 1.5 Gbps. Up to 1,000 doors with access control only	Qualified for 192 doors and 96 video channels with a total recording bitrate up to 850 Mbps. Up to 1,000 doors with access control only	Qualified for 128 doors and 64 video channels with a total recording bitrate up to 500 Mbps. Up to 1,000 doors with access control only	Qualified for 128 doors and 64 video channels with a total recording bitrate up to 500 Mbps. Up to 1,000 doors with access control only	Qualified for 64 doors and 32 video channels with a total recording bitrate up to 300 Mbps. Up to 1,000 doors with access control only	Qualified for 64 doors and 32 video channels with a total recording bitrate up to 300 Mbps. Up to 1,000 doors with access control only	Qualified for 64 doors and 32 video channels with a total recording bitrate up to 256 Mbps. Up to 1,000 doors with access control only
Redundant power supply	✓	✓	✓	✓	-	-	-
Network connectors	2x RJ45 1 Gbps (Management port) 2x RJ45 10 Gbps	2x RJ45 1 Gbps	2x RJ45 1 Gbps	2x RJ45 1 Gbps	2x RJ45 1 Gbps	2x RJ45 1 Gbps	1x RJ45 1 Gbps
Other connectors	Front side: 1x USB 2.0 1x VGA 1x iDRAC direct port Rear side: 1x USB 2.0 1x USB 3.0 1x VGA 1x iDRAC dedicated Ethernet port	Front side: 1x USB 2.0 1x VGA 1x iDRAC direct port Rear side: 1x USB 2.0 1x USB 3.0 1x VGA 1x iDRAC dedicated Ethernet port	Front side: 1x USB 2.0 1x iDRAC direct port Rear side: 1x USB 2.0 1x USB 3.2 1x VGA 1x Serial port 1x iDRAC dedicated Ethernet port	Front side: 1x USB 2.0 1x iDRAC direct port Rear side: 5x USB 2.0 1x USB 3.0 1x VGA (Do not use) 1x Serial port 1x iDRAC dedicated Ethernet port 3x Mini DisplayPort™ (max two monitors recommended)	Frontside: 1x USB 2.0 1xiDRACdirect port Rearside: 1x USB 2.0 1x USB 3.2 1x VGA 4x Mini DisplayPort™ 1xSerial port 1xiDRACdedicated Ethernet port	Frontside: 1x USB 2.0 1xiDRACdirect port Rearside: 1x USB 2.0 1x USB 3.2 1x VGA 1xSerial port 1xiDRACdedicated Ethernet port	Front side: 1x USB 3.2, 2x USB 2.0 1x USB-C port 1x UAJ (Universal audio jack) Rear side: 4x USB 3.2 2x USB 2.0 3x Display port 1.4a 1x UAJ (Universal audio jack) 1x Header for remote power button
Supported monitors	Complete with workstation	Complete with workstation	Complete with workstation	Live view: 2	Complete with workstation	Complete with workstation	Live view: 2
Mounting accessories	Rack rails	Rack rails	Rack rails	-	Rack rails	Rack rails	-
Sustainability	-	-	-	-	-	-	-

* The listed supported configurations have been tested with hardware decoding turned off. ** Supported on one 4K and one 1440p monitor. At 15fps, two 4K monitors are supported.

Workstations

	Workstations	
	AXIS S9301 Mk II 	AXIS S9302 Mk II 
AXIS Camera Station Pro Core Device NVR Licenses/ AXIS Audio Manager Pro Licenses	0/10	0/10
Included software	AXIS Camera Station Pro client AXIS Recorder Toolbox	AXIS Camera Station Pro client AXIS Recorder Toolbox
Operating system	Microsoft® Windows® 11 IoT Enterprise LTSC 2024	Microsoft® Windows® 11 IoT Enterprise LTSC 2024
Live video streams	Live view*: 1 stream x 4K at 30 fps 4 split x 1080p at 30 fps 9 split x 1080p at 30 fps** 9 split x 720p at 30 fps 16 split x 450p at 15 fps 25 split x 450p at 15 fps 36 split x 360p at 15 fps Supports any combination for up to two 4K monitors. Playback: High-speed playback may affect video performance. Playback resolution matches the recording resolution and is not adjusted to the monitor's resolution.	Live view*: 1 stream x 4K at 30 fps 4 split x 1080p at 30 fps 9 split x 1080p at 30 fps 9 split x 720p at 30 fps 16 split x 450p at 15 fps 25 split x 450p at 15 fps 36 split x 360p at 15 fps Supports any combination for up to four 4K monitors. Playback: High-speed playback may affect video performance. Playback resolution matches the recording resolution and is not adjusted to the monitor's resolution.
Power	Max 90 W 100-240 V AC, 1.5 A, 50/60 Hz 19,5 V DC, 4,62 A External AC/DC adapter	300 W 80+ Platinum 100-240 V AC, 4.2 A, 50/60 Hz
Connectors	Front side: 1x USB 3.2 1x USB-C port 1x UAJ (Universal audio jack) 1x Audio line/out Rear side: 4x USB 3.2 2x Display port 1.4a 1x RJ45 1 Gbps	Front side: 1x USB 3.2 2x USB 2.0 1x USB-C port 1x UAJ (Universal audio jack) Rear side: 4x USB 3.2 2x USB 2.0 3x Mini Display port 1.4a 1x Display port 1.4a 1x UAJ (Universal audio jack) 1x Header for remote power button 1x RJ45 1 Gbps
Supported monitors	2	4
Included services	Onsite hardware replacement service	Onsite hardware replacement service
Other	Can complement AXIS S12 Recorder Series	Can complement AXIS S12 Recorder Series
Sustainability	-	-

*The listed supported configurations have been tested with hardware decoding turned off.

**Supported on one 4K and one 1440p monitor. At 15fps, two 4K monitors are supported.

Storage

43

	Cloud storage
	AXIS Camera Station Cloud Storage 
Resolution	720p, 1080p
Retention time	30 days (stackable)
Supported regions	US, Canada, UK, EU (Frankfurt), Australia, Japan
License type	1 year per sensor
Compatible systems	AXIS Camera Station Edge AXIS Camera Station Pro
Data streaming	Video, Audio*

*AXIS Camera Station Pro only support AXIS Cloud Storage
for video data stream

	SD Cards			
	AXIS Surveillance card 1 TB 	AXIS Surveillance card 512 GB 	AXIS Surveillance card 256 GB 	AXIS Surveillance card 128 GB 
Form factor	Micro SDXC™	Micro SDXC™	Micro SDXC™	Micro SDXC™
NAND Technology (NOT-AND logic gate)	QLC	QLC	TLC	TLC
Industrial grade	✓	✓	✓	✓
Built-in health monitoring features	✓	✓	✓	✓
Sustainability	PVC free Halogen free	PVC free Halogen free	PVC free	PVC free
UHS Speed class	U3	U3	U3	U3
Video speed class	V10	V10	V30	V30
Transfer speed read/write	Sequential read performance: Up to 100 MB/s Sequential write performance: Up to 39 MB/s	Sequential read performance: Up to 100 MB/s Sequential write performance: Up to 39 MB/s	Sequential read performance: Up to 100 MB/s Sequential write performance: Up to 50 MB/s	Sequential read performance: Up to 100 MB/s Sequential write performance: Up to 50 MB/s
Operating conditions	-25 °C to 85 °C (-13 °F to 185 °F)	-25 °C to 85 °C (-13 °F to 185 °F)	-25 °C to 85 °C (-13 °F to 185 °F)	-25 °C to 85 °C (-13 °F to 185 °F)
Storage conditions	-40 °C to 85 °C (-40 °F to 185 °F)	-40 °C to 85 °C (-40 °F to 185 °F)	-40 °C to 85 °C (-40 °F to 185 °F)	-40 °C to 85 °C (-40 °F to 185 °F)

Accessory selector

We offer a complete range of high-quality accessories to complement your network video, audio, access control, and intercom systems. Go to the Accessory selector to find the right accessories for your Axis products.

[Accessory Selector](#)



Everything you need to complete your systems

We offer a complete range of high-quality accessories to complement your network video, audio, access control, and intercom systems.

[Storage](#)

Reliable storage on hard drives or SD cards.



[Mounts](#)

All you need to complete your installation.



[Illuminators](#)

White and infra-red led illuminators.



[Power and connectivity](#)

All you need to power your system and connect its components.



[Housings and cabinets](#)

Protective housing and enclosures for cameras and accessories.



[Joysticks and keypads](#)

Modular control board for professional camera and video management.



[Lenses](#)

Optional lenses to meet special requirements.



[Audio](#)

Audio accessories for your system.



[Tools and extras](#)

Tools and accessories to manage, maintain and wash your Axis product.



Body worn

45

Body worn cameras					Body worn sensors		Body worn streaming	
	AXIS W120 Body Worn Camera 	AXIS W110 Body Worn Camera 	AXIS W111 Body Worn Camera  	AXIS W102 Body Worn Camera 		AXIS TW1200 Body Worn Mini Bullet Sensor 	AXIS Body Worn Live 	
Max. video resolution	1920x1080	1920x1080	1920x1080	1920x1080	Max. video resolution	1920x1080	AXIS Body Worn Live streams live video, audio, and metadata from Axis body worn cameras. It is hosted by Axis in the cloud, or by you in your own infrastructure. Secure and reliable, it supports a sense of safety for camera wearers and informed decision making by operators.	
Image sensor size and sensitivity/ Lens/Horizontal field of view	1/2.9", 0.1 lux, 2.3 mm, F2.1, 137°	1/2.8", 0.1 lux, 1.9 mm, F2.2, 140°	1/2.8", 0.1 lux, 1.9 mm, F2.2, 140°	1/2.9", 0.1 lux, 2.3 mm, F2.1, 137°	Image sensor size and sensitivity/Lens/ Horizontal field of view	1/2.9", 0.1 lux, 2.1 mm, F2.1, 141°		
Max. frames per second	30	30	30	30	Max. frames per second	30		
Audio support/Built-in mic	- / 2	✓ / 1	✓ / 1	- / 2	Audio support/Built-in mic	- / -		
Battery	3600mAh	1600mAh	2000mAh	3600mAh	Operating temperature	-20 °C to 55 °C (-4 °F to 131 °F)		
Operating temperature	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 45 °C (-4 °F to 113 °F)	-20 °C to 45 °C (-4 °F to 113 °F)	-20 °C to 55 °C (-4 °F to 131 °F)	Approvals	IP67	Mobile application AXIS Body Worn Assistant 	
Approvals	IP67	IP54	IP54	IP67	Lightfinder	-		
Lightfinder	-	-	-	-	Zipstream for body worn/H.264/H.265	✓ / ✓ / -	AXIS Body Worn Assistant is an app that gives users instant access to recordings on their body worn cameras. They can review videos on the spot, categorize it, and add notes. AXIS Body Worn Live enables real-time streaming of video and audio from Axis body worn cameras, and their locations can be viewed on a map.	
Zipstream for body worn/ H.264/H.265	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	OptimizedIR/Built-in IR	-		
OptimizedIR/Built-in IR	- / -	- / -	- / -	- / -	Sustainability	PVC free		
Recording time	Up to 15h operating time in 720p Up to 13.5h operating time in 1080p Up to 29h in standby mode	Up to 7h operating time in 720p Up to 5.5h operating time in 1080p Up to 11,5h in standby mode	Up to 10h operating time in 720p Up to 8.5h operating time in 1080p Up to 16,5h in standby mode	Up to 15h operating time in 720p Up to 13.5h operating time in 1080p Up to 29h in standby mode	Body worn system controller		Camera activation	
Storage size/Encryption	64GB AES256 EU/ROW 128GB US 64GB	128GB AES256	128GB AES256	64GB AES256	AXIS W800 System Controller 		AXIS W401 Body Worn Activation Kit 	
Positioning system	GPS, Galileo, GLONASS	-	-	GPS, Galileo, GLONASS	Storage size/Encryption	480 GB / AES256	AXIS W401 Body Worn Activation Kit automatically activates recording by all body worn cameras in the same system when a lightbar or siren is activated, or a panic button is pressed.	
Sensors	3-axis digital gyroscope and 3-axis digital accelerometer, compass	3-axis digital gyroscope and 3-axis digital accelerometer	3-axis digital gyroscope and 3-axis digital accelerometer	3-axis digital gyroscope and 3-axis digital accelerometer, compass	Power	Max 16W, 12 V DC		
Wireless	LTE/4G, Wi-Fi® a/b/g/n/ac Bluetooth® 5.1 Low Energy	Wi-Fi® a/b/g/n/ac Bluetooth® 5.1 Low Energy	Wi-Fi® a/b/g/n/ac Bluetooth® 5.1 Low Energy	Wi-Fi® a/b/g/n/ac Bluetooth® 5.1 Low Energy	Connectors	Uplink: RJ45 10/100/1000 Mbps Device network: 5x RJ45 10/100/1000 Mbps USB 2.0		
Sustainability	BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	BFR/CFR free	Operating temperature	0 °C to 40 °C (32 °F to 104 °F)		
Highlighted features	Signed video	Signed video	Signed video	Signed video	Sustainability	PVC free		

Network audio

	Network speakers				
	AXIS C1310-E Mk II 	AXIS XC1311 	AXIS C1610-VE 	AXIS C1710 	AXIS C1720 
Voice announcements	✓	✓	✓	✓	✓
Background music	-	-	✓	✓	✓
Onboard audio clips	✓	✓	✓	✓	✓
Max sound pressure level	>121 dB	>110 dB	>106 dB	>110 dB PoE Class 6 >103 dB PoE Class 4	>99 dB PoE Class 6 >91 dB PoE Class 4
Frequency response	280Hz - 12.5kHz	400 Hz - 5.5 kHz	200Hz - 16kHz	85Hz - 20kHz	180Hz - 15,5kHz
Coverage pattern	70° horizontal by 100° vertical	54°	130° coaxial	120° coaxial	240° horizontal by 280° vertical coverage from dual-sided speakers
Display and indicators	-	-	Frontfacing LED	1 Frontfacing LED 1 LCD Display 480x1920 1 RGBW strobe, Max 182 lm (PoE Class 6)/103 lm (PoE Class 4)	2 Frontfacing LED 2 LCD Display 480x1920 1 RGBW strobe, Max 266 lm (PoE Class 6)/150 lm (PoE Class 4)
Memory card slot	-	-	✓	✓	✓
Power	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 4 PoE Class 6	PoE Class 4 PoE Class 6
PIR sensor	-	-	-	✓	✓
In-/output ports	2	2	2	2 supervised	2 supervised
Input for external mic	-	-	✓	✓	✓
Built-in mic	✓	Only for remote health testing	✓	✓	✓
Two-way audio	Half duplex, echo cancellation	-	Full duplex, echo cancellation	Full duplex, echo cancellation	Full duplex, echo cancellation
Secure boot/ Secure keystore	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
Approvals	IP66/NEMA 4X	IP66/NEMA 4X	IP66, IK11	-	-
Sustainability	PVC free	PVC free	PVC free, BFR/CFR free 26% bio-plastics	PVC free, BFR/CFR free 70% bio-plastics	PVC free, BFR/CFR free 70% bio-plastics
Highlighted features	AXIS Audio Manager Edge included VAPIX, ACAP, SIP	AXIS Audio Manager Edge included VAPIX, ACAP, SIP	AXIS Audio Manager Edge included VAPIX, ACAP, SIP	AXIS Audio Manager Edge included VAPIX, ACAP, SIP	AXIS Audio Manager Edge included VAPIX, ACAP, SIP

[illegible]

Network audio

Audio system devices

	AXIS C8110 Network Audio Bridge 	AXIS C8210 Network Audio Amplifier 	AXIS C8310 Audio Volume Controller 	
Built-in amplifier	-	✓	Keypad	Tactile backlit buttons
Audio input	Line level 3-pole 3.5 mm jack	Mic in 3-pole 3.5 mm jack	Buttons	Volume (+/-), mute, audio source selection (1, 2 and 3)
Audio output	Line level RCA R+L	Speaker out 2-pole 5.08 mm		
Voice announcements	✓	✓	Configuration in audio management software	Volume range and allowed audio sources
Onboard audio clips	✓	✓	Configuration in device web interface	Use any button as condition for event actions
Background music	✓	✓	Connectors	I/O - 4 pin 2.5 mm terminal block (connected to a network audio device)
Configurable I/O:s	2	2		
Power	PoE Class 2, DC	PoE Class 3, PoE Class 4	Power	Power is supplied from the device that AXIS C8310 is connected to (12 V DC, max 0.6 W)
Memory card slot	✓	✓	Mounting option	Wall-mounted with frame or recessed-mounted in single gangbox or I/O connection box
IP rating	IP20	IP20		
Secure boot/Secure keystore	✓ / ✓	- / -	IP rating	IP42
Sustainability	PVC free, BFR/CFR free	PVC free, BFR/CFR free	Sustainability	PVC free, BFR/CFR free 38% recycled plastics
Highlighted features	AXIS Audio Manager Edge included VAPIX, ACAP, SIP	AXIS Audio Manager Edge included VAPIX, ACAP, SIP		

Network microphone

	AXIS C6110 Network Paging Console 
Microphone	Built-in microphone, optional gooseneck microphone, headset jack
Configurable buttons	12 physical buttons linked to an expandable tree structure
Display	7 inch full-color LCD display
Voice announcements	✓
Two-way audio	Full duplex, echo cancellation
Onboard audio clips	✓
Support for incoming video calls	✓
Memory card slot	✓
Power	PoE Class 3
Sound pressure level (built-in speaker)	80 dB
Sustainability	PVC free 50% recycled plastics
Highlighted features	VAPIX, SIP

Network audio

49

Audio management software

	AXIS Audio Manager Edge 	AXIS Audio Manager Pro 	AXIS Audio Manager Pro C7110  NEW
	Please note; AXIS Audio Manager Edge is built-in on Axis network speakers and audio system devices. AXIS Audio Manager Pro is the standalone software while AXIS Audio Manager Pro C7110 also includes PC hardware.		
Number of speakers	200	5000	5000
Number of zones	20	500+	500+
Scheduling	Weekly	Advanced	Advanced
Content management	✓	✓	✓
Licences	Free	Licensed	100 licenses included
Hardware	-	Minimum requirement on PC hardware as AXIS C7050 Mk III or better	Intel® Core™ Ultra 5 235
Storage	-	128 GB required	256 GB SSD included
Operating system	-	Supported OS: Microsoft Windows 10 Windows Server 2016 Windows Server 2019	Included OS: Microsoft Windows 11 IoT Enterprise LTSC 2024
AXIS Camera Station Pro Integration	-	✓	✓
Virtual Machine support	-	VMWare ESXi Microsoft Hyper-V Microsoft Windows Datacenter With configuration and resources allocated similar to the minimum hardware requirements	-

	AXIS Audio Manager Center	
	Standard version (unlicensed)	Premium version (licensed)
Size		
Thousands of sites	✓	✓
User management and access control		
MyAxis users	✓	✓
Role based access control	✓	✓
Remote access		
Remote access to all sites in the system	✓	✓
Mobile app functionality Voice	-	✓
Mobile app functionality Background music	✓	✓
Health monitoring		
Devices and site connections	✓	✓
Email notifications	✓	✓
Content management and scheduling		
Individual site-by-site schedulings (provided by AXIS Audio Manager Edge)	✓	✓
Multi-site music scheduling	-	✓
Multi-site announcement scheduling	-	✓
Multi-site advertisement scheduling	-	✓

Access control

50

Network door controllers

							
Number of doors	Eight doors	Four doors	Two doors	Two doors	Four doors	One door	One door
Application * outdoor rated enclosure required	Centralized installation, Compact and cost-effective	Centralized installation, Compact and cost-effective	Ready out of box - indoor & outdoor ready*	Ready out of box - indoor & outdoor ready*	Complete four doors kit with enclosure - all in one	Compact design - install it anywhere	Compact design - install it anywhere
Typical installation	Wall mount, DIN rail, 3rd party or Axis enclosure	Wall mount, DIN rail, 3rd party or Axis enclosure	Wall mount, DIN rail, custom enclosure	Wall mount, DIN rail	Wall mount	Wall mount, DIN rail	DIN rail, custom enclosure
Number of credentials per controller	250 000	250 000	250 000	250 000	250 000	250 000	250 000
Number of event history per controller	250 000	250 000	250 000	250 000	250 000	250 000	250 000
Secure element	Axis Edge Vault with secure key store	Axis Edge Vault with secure key store	Axis Edge Vault with secure key store	Axis Edge Vault with secure key store	Axis Edge Vault with secure key store	Axis Edge Vault with secure key store	Axis Edge Vault with secure key store
Identification type	Card, PIN, QR code, license plate	Card, PIN, QR code, license plate	Card, PIN, QR code, license plate	Card, PIN, QR code, license plate	Card, PIN, QR code, license plate	Card, PIN, QR code, license plate	Card, PIN, QR code, license plate
Readers	16x OSDP (multi-drop) or 16x Wiegand readers with AXIS TA1101-B Wiegand to OSDP converter	8x OSDP (multi-drop) or 8x Wiegand readers with AXIS TA1101-B Wiegand to OSDP converter	4x OSDP or 2x Wiegand	4x OSDP or 2x Wiegand	8x OSDP or 4x Wiegand	2x OSDP or 1x Wiegand	2x OSDP or 1x Wiegand
Relays	8x Form C relay; Dry or Wet (12V/24V DC)	4x Form C relay; Dry or Wet (12V/24V DC)	2x Form C relay Dry or Wet (12V DC/24V DC)	2x Form C relay Dry or Wet (12V DC/24V DC)	4x Form C relay Dry or wet (12V DC/24V DC)	1x Form C relay Dry or wet (12V DC/24V DC)	1x Form C relay Dry or wet (12V DC/24V DC)
Additional I/Os	2x configurable I/O	2x configurable I/O	6x configurable I/Os	6x configurable I/Os	8x configurable I/Os	2x configurable I/Os	2x configurable I/Os
Power supply	PoE+ or 12V DC and 12V DC (Door 1-4) and 12V DC (Door 5-8)	PoE+ or 12V DC and 12V DC (Door 1-4)	PoE Class 4, DC (10V-28V DC)	PoE Class 4, DC (10V-28V DC)	PoE+ or DC (12V DC)	PoE Class 4, DC (12V DC)	PoE Class 4, DC (12V DC)
Power budget per controller	Door relay: 3.8A@12V wet, 12V/24V combined per 4 doors Door inputs: 400mA@12V combined per 4 doors Reader ports: 2A@12V combined per 4 doors	Door relay: 3.8A@12V wet, 12V/24V Door inputs: 400mA@12V combined Reader ports: 2A@12V combined	PoE: 1,300mA@12V DC DC: 2,100mA@12V DC	PoE: 1,300mA@12V DC DC: 2,100mA@12V DC	PoE+: 1,400mA@12V DC DC: 2,100mA@12V DC	PoE: 1,400mA@12V DC DC: 2,100mA@12V DC	PoE: 1,400mA@12V DC DC: 2,100mA@12V DC
Operating conditions	-40 °C to 70 °C (-40 °F to 158 °F)	-40 °C to 70 °C (-40 °F to 158 °F)	-40 °C to 70 °C (-40 °F to 158 °F)	-40 °C to 70 °C (-40 °F to 158 °F)	0 °C to 70 °C (32 °F to 158 °F)	0 °C to 70 °C (32 °F to 158 °F)	0 °C to 70 °C (32 °F to 158 °F)
Plenum rated	-	-	-	✓	-	✓	-
Dimensions	326.5 x 166.1 x 28.5 mm (12.85 x 6.54 x 1.21 in)	210 x 166.1 x 28.5 mm (8.27 x 6.54 x 1.12 in)	175 x 175 x 50 mm (6.9 x 6.9 x 2.0 in)	175 x 175 x 60 mm (6.9 x 6.9 x 2.4 in)	361 x 229 x 282 mm (14.2 x 9 x 11.1 in)	144 x 122 x 50 mm (5.7 x 4.8 x 2.0 in)	134 x 95 x 45 mm (5.3 x 3.7 x 1.8 in)
Sustainability	PVC free	PVC free	PVC free	PVC free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free

Access control

51

Network I/O relay modules

	AXIS A9210	AXIS A9910	AXIS A9920	AXIS A9188	AXIS A9188-VE
			 NEW		
Number of I/Os	10	8	16	8	8
Number of relays	1	4	16	8	8
IP-device	✓	Expansion module	Expansion module	✓	✓
Power in	DC, PoE Class 3, PoE Class 4	DC	DC	DC, PoE Class 3, PoE Class 4	DC, PoE Class 3, PoE Class 4
Power out	DC	DC	DC	DC	DC
Outdoor ready	-	-	-	-	✓
Approvals	-	-	-	-	UL 294
ACAP support	✓	-	-	✓	✓
Sustainability	PVC free	PVC free	PVC free	PVC free	PVC free

Credentials

	AXIS TA4711 Access Card	AXIS TA4712 Key Fob	AXIS Mobile Credential
			
RFID technology	MIFARE® DESFire® EV3 8K	MIFARE® DESFire® EV3 8K	Mobile based application that ensures secure efficient, and reliable access control. Ideal for today's mobile-first society, it supports both bluetooth and static and dynamic QR codes as credentials.
RFID frequency	13.56 MHz	13.56 MHz	
Memory	8 kB	8 kB	
Approvals	IP68	IP67, IK09	
Material	PVC free, 100% recycled PET-G	PVC free, Plastic and stainless steel	

Readers

	AXIS A4612	AXIS A4611	AXIS A4610	AXIS A4030-E	AXIS A4130-E	AXIS A4131-E
		 NEW	 NEW			
Keypad	-	✓	-	-	-	✓
LED strip	✓	✓	✓	✓	✓	✓
RS485 (OSDP)	-	-	-	OSDP	OSDP	OSDP
Bluetooth	✓	-	-	-	-	-
OSDP Secure channel	-	-	-	✓	✓	✓
Power	PoE class 3 or 12V DC	PoE class 3 or 12V DC	PoE class 3 or 12V DC	12V, DC	12V, DC	12V, DC
Approvals	IP55	IP54	IP54	IP65, IK07	IP66, IK07	IP66, IK07
UL 294	-	-	-	✓	✓	✓

Applications

AXIS Barcode Reader	AXIS Door Controller Extension
	
ACAP solution for reading QR code credentials. For installation on select Axis network cameras and intercoms.	AXIS Door Controller Extension is a pre-installed application on Axis network door controllers, that enables wireless lock integration, up to 16x doors per door controller.
For more information, visit: AXIS Barcode Reader	

Access control management software

AXIS Camera Station Secure Entry



Scalability	
Doors per server	up to 1000
Multiple servers per system	up to 64
Cardholders	10.000 (50k credentials)
Credentials	5 per cardholder, including Card, PIN, QR code, Mobile, License plate number, etc.
Event transactions storage	250.000 on the local device
PIN	up to 24 digits
System	
Door controller	Axis network door controllers
Reader	OSDP (Secure Channel), Wiegand, or IP Intercom reader
Wireless lock	✓
Mobile application	✓
Licenses	one license per connected door controller
Axis secure remote access	✓
Import and export	✓, csv or Active directory integration
Operation	
Live view	✓, video cross verification
Map view	✓
Access event	✓, video cross verification
Audit log	✓
Action rule	✓, customized
Remote control	✓
Access port	✓
Advanced access control	
Multi-factor authentication	✓
Unlock schedule	✓
First-person in	✓
Lockdown	✓, both on door and zones
Anti-passback	✓, both timed and logical
Interlock/airlock	✓
Two-person rule	✓
Double swipe	✓

Network intercoms

52

	Video intercoms			
	AXIS I8307-VE 	AXIS A8207-VE Mk II 	AXIS I8116-E 	AXIS I8016-LVE 
Max. video resolution	3840x2160 (8 MP)	3072x2048 (6.3 MP)	1920x1080 (5 MP)	2592x1944
Horizontal field of view	150°	180°	162°	140°
Dimensions (H x D x W)	290 x 144 x 44 mm (11.4 x 5.7 x 1.74 in)	248 x 106 x 51 mm (9 3/4 x 4 3/16 x 2 in)	148 x 41 x 48 mm (5.83 x 1.63 x 1.5 in)	124 x 124 mm (4.9 X 4.9 in)
Max. frames per second	25/30	25/30	30/25	30/25
Min. illumination (lux) Color/B&W	0.55/-	0.55/-	0.15/0.00	0.16/0.00
Audio support	✓	✓	✓	✓
Built-in mic	✓	✓	✓	✓
Built-in speaker	✓	✓	✓	✓
Ports	4 I/Os, 2 Relays	2x Relay output, 4x I/O Line in/out	1x Relay output, 2x I/O	1x Relay output, 2x I/O Line-in/out
Reader	RFID Reader (with HID® iClass® support)	RFID Reader (with HID® iClass® support)	-	-
Reader protocol	RS485 (OSDP), Wiegand, VAPIX® reader interface	RS485 (OSDP), Wiegand VAPIX® Reader Interface	OSDP	-
Embedded access	Entry list	Entry list	Entry list	-
Included analytics	AXIS Object Analytics AXIS Scene Metadata	AXIS Guard Suite Audio detection Shock detection AXIS Video Motion Detection	AXIS Object Analytics AXIS Scene Metadata	Audio detection Shock detection AXIS Video Motion Detection
Power	PoE Class 3, PoE Class 4, DC	PoE Class 3, PoE Class 4, DC	PoE Class 3, 12 V DC	PoE Class 3
Operating temperature	-30 °C to 55 °C (-22 °F to 131 °F)	-40 °C to 55 °C (-40 °F to 131 °F)	-30 °C to 60 °C (-22 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)
Approvals	IP66/IK08/NEMA 4X	IP66/IK08/NEMA 4X	IP65/IK10/NEMA 4X	IP66/IP69/IK10/NEMA 4X
WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR
Zipstream	✓	✓	✓	✓
SIP (VoIP)	✓	✓	✓	✓
Secure Boot/ Signed video/ Secure keystore	✓/✓/✓	✓/-/-	✓/✓/✓	✓/✓/✓
Sustainability	PVC free, BFR/CFR free	PVC free	PVC free, BFR/CFR free	PVC free
Highlighted features	Built-in tamper Two-way video	ACAP IK08, T-coil, Pictograms Keypad, HDMI, UL294	OSDP port Built-in tamper switch Deep learning	ACAP, Pictograms Suitable with US 2-gang box IK10 Anti-ligature design


Network intercoms

53

	Audio intercoms		Safety intercom	Answering units	
	AXIS I7020 	AXIS I7010-VE 	AXIS I7010-VE Safety 	AXIS I5304 	2N IP PHONE D7A 
Max. video resolution	-	-	-	1024x600	-
Horizontal field of view	-	-	-	-	-
Dimensions (H x D x W)	124 x 124 mm (4.9 X 4.9 in)	124 x 124 mm (4.9 X 4.9 in)	124 x 124 mm (4.9 X 4.9 in)	157 x 193 x 88 mm (6.2 x 7.6 x 3.5 in)	259 x 220 x 215 mm
Max. frames per second	-	-	-	-	-
Min. illumination (lux) Color/B&W	-	-	-	-	-
Audio support	✓	✓	✓	✓	✓
Built-in mic	✓	✓	✓	✓	✓
Built-in speaker	✓	✓	✓	✓	✓
Ports	1x Relay output, 2x I/O Line-in/out	1x Relay output, 2x I/O Line-in/out	1x Relay output, 2x I/O Line-in/out	Doorbell input & Line out	-
Reader	-	-	-	-	-
Reader protocol	OSDP	OSDP	OSDP	-	-
Embedded access	Entry list	Entry list	Entry list	-	-
Included analytics	Active tampering alarm Audio detection	Active tampering alarm Audio detection	Active tampering alarm Audio detection	-	-
Power	PoE Class 3, PoE Class 4	PoE Class 3, PoE Class 4	PoE Class 3, PoE Class 4	PoE Class 3	PoE Class 3, DC 5V/2A
Operating temperature	0 °C to 45 °C (32 °F to 113 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	0 °C to 50 °C (32 °F to 122 °F)	-
Approvals	IP65/NEMA 4X	IP66/IP69/IK10/NEMA 4X	IP66/IP69/IK10/NEMA 4X	-	-
WDR	-	-	-	-	-
Zipstream	-	-	-	-	-
SIP (VoIP)	✓	✓	✓	✓	✓
Secure Boot/ Signed video/ Secure keystore	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	- / - / -	- / - / -
Sustainability	PVC free, BFR/CFR free	PVC free, BFR/CFR free	PVC free, BFR/CFR free	-	-
Highlighted features	Camera pairing ISO 14644-1 Class 3-9	ACAP Camera pairing Suitable with US 2-gang box IK10 Anti-ligature design	ACAP Camera pairing Suitable with US 2-gang box IK10 Anti-ligature design	-	-

2N - An Axis company

54

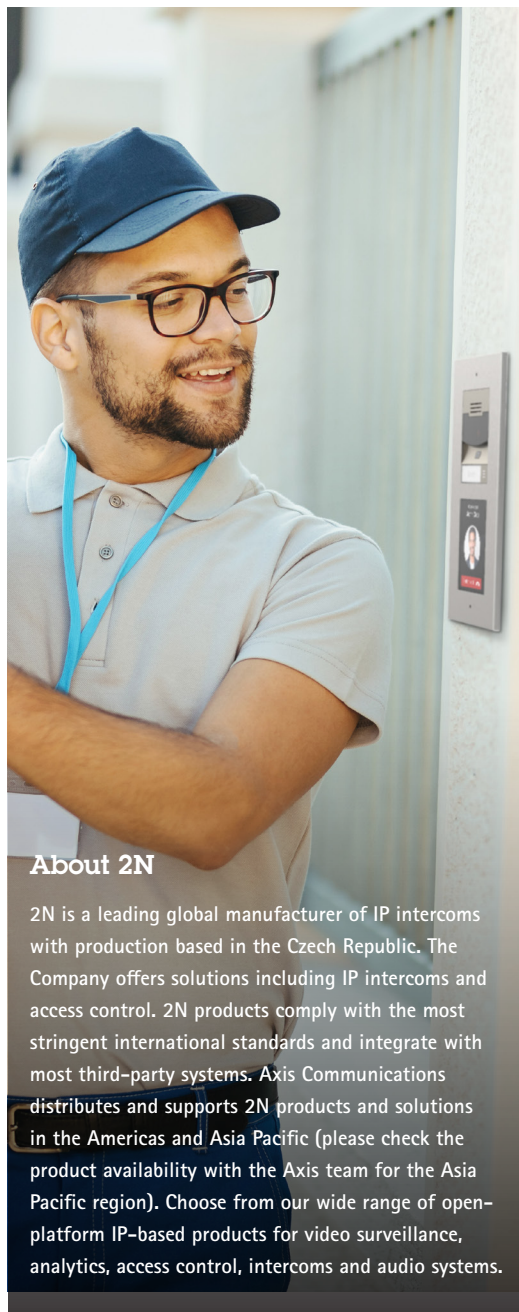


	IP and LTE video intercoms		
	2N IP Style* More versions on the product page	2N IP Verso 2.0 More versions on the product page	2N LTE Verso More versions on the product page
Integrated camera available	✓	✓	✓
Max frames per second	30	30	30
IR Illumination / WDR support	✓ / ✓	✓ / ✓	✓ / -
Camera resolution (video, in-call)	2560x1920 (QHD)	1920x1440 (Full HD)	640x480 (VGA)
Camera resolution (JPEG)	2560x1920 (QHD)	1920x1440 (Full HD)	1280x960 (HD)
Max viewing angle	138° (H), 114° (V)	105° (H), 126° (V)	138° (H), 105° (V)
Numerical keypad available	✓	✓	✓
Reader	Bluetooth, QR, RFID (with HID® iCLASS® support)	Bluetooth, QR, Fingerprint, RFID (with HID® iCLASS® support)	Bluetooth, Fingerprint, RFID (with HID® iCLASS® support)
Reader protocol	Wiegand, OSDP	Wiegand, OSDP	Wiegand, OSDP
Audio support/ Built-in mic/Built-in speaker	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
SIP/VoIP	✓	✓	✓
Display	✓	optional	optional
Tamper alarm output	✓	✓	✓
Suitable for outdoor use	✓	✓	✓
Operating temperature	-22°F to 140 °F (-30 °C to 60 °C)	-40°F to 140°F (-40 °C to 60 °C)	-40°F to 140°F (-40 °C to 60 °C)
IP/IK coverage	IP65, IK08	IP54/IK8 (touch display IK7)	IP54/IK8 (touch display IK7)
Number of users	10 000	10 000	10 000
Security Relay support	✓	✓	✓
Dimensions WxHxD inch (incl.frame)	6.693 x 13.976 x 1.575 (170 mm x 355 mm x 40 mm)	4.213 x 9.213 x 1.102 (2 modules) (107 mm x 234 mm x 28 mm)	4.213 x 9.213 x 1.102 (2 modules) (107 mm x 234 mm x 28 mm)
Power supply PoE (802.3af) / 12V DC	802.3at (PoE+) / ✓	✓ / ✓	- / ✓
LTE connectivity	-	-	✓
Ports	1x Active OUT, 1x Relay output, 3x IN, Line-out	1x Active OUT, 1x Relay output, 1x IN, Line-out	1x Active OUT, 1x Relay output, 1x IN, Line-out
Included analytics	Motion detection, noise detection	Motion detection, noise detection	Motion detection, noise detection

2N - An Axis company

55

	IP and LTE intercoms				
	2N IP One More versions on the product page 	2N IP Solo More versions on the product page 	2N IP Force 2.0 More versions on the product page 	2N IP Safety More versions on the product page 	2N IP Base More versions on the product page 
Integrated camera available	✓	✓	✓	-	✓
Max frames per second	30	30	30	-	30
IR Illumination / WDR support	✓ / ✓	✓ / -	✓ / ✓	- / -	- / -
Camera resolution (video, in-call)	1920x1440 px	640x480 (VGA)	2560x1920 (QHD)	-	640 x 480 (VGA)
Camera resolution (JPEG)	1920x1440 px	1280x960 (HD)	2592x1944 (HD)	-	1280 x 960 (HD)
Max viewing angle	156° (H), 116° (V)	128° (H), 95° (V)	133° (H), 112° (V)	-	135° (H), 109° (V)
Numerical keypad available	-	-	✓	-	-
Reader	-	-	QR, RFID (with HID® iCLASS® support)	-	-
Reader protocol	-	-	Wiegand, OSDP	-	-
Audio support/Built-in mic/ Built-in speaker	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
SIP/VoIP	✓	✓	✓	✓	✓
Display	-	-	-	-	-
Tamper alarm output	✓	✓	✓	✓	✓
Suitable for outdoor use	✓	✓	✓	✓	✓
Operating temperature	-40°F to 140°F (-40 °C to 60 °C)	-40°F to 140°F (-40 °C to 60 °C)	-22°F to 131 °F (-30 °C to 55 °C)	-40°F to 131°F (-40 °C to 55 °C)	-40°F to 131°F (-40 °C to 55 °C)
IP/IK coverage	IP66/IK08	IP54/IK8	IP69K/IK10	IP69K/IK10	IP65/IK7
Number of users	10 000	10 000	10 000	10 000	10 000
Security Relay support	✓	✓	✓	✓	✓
Dimensions WxHxD inch (incl.frame)	3.071 x 6.772 x 2.205 (78 mm x 172 mm x 53 mm)	4.21 x 5.12 x 1.10 (107 mm x 130 mm x 28 mm)	4.29 x 8.54 x 3.27 (109 x 217 x 83 mm)	4.291 x 8.543 x 3.268 (109 mm x 217mm x 83 mm)	4.291 x 9.016 x 1.220 (109 mm x 229 mm x 31 mm)
Power supply PoE (802.3af) / 12V DC	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
LTE connectivity	-	-	-	-	-
Ports	1x Active OUT, 1x Relay output, 1x IN	1x Active OUT, 1x Relay output, 1x IN, Line-out	1x Active OUT, 1 Relay output, up to 3x IN	1x Active OUT, 1x Relay output, up to 1x IN, Line-out	1x Active OUT, 1x Relay output, 1x IN
Included analytics	Motion detection, noise detection	Motion detection, noise detection	Motion detection, noise detection	Noise detection	Motion detection, noise detection

2N Indoor stations


	2N Indoor View 	2N Indoor Compact 	2N Clip 	2N Clip 2-wire IP 	2N Indoor Talk 
Recommended use	high-end apartment buildings; offices	high-end/mid-range apartment buildings; offices	mid-range apartment buildings	mid-range retrofit apartment buildings	secondary unit; offices
Display	7"	4.3"	4.3"	4.3"	-
Display resolution (pixels)	1024x600	480x272	480x272	480x272	-
Unit control	capacitive touch display	capacitive buttons	capacitive buttons	capacitive buttons	capacitive buttons
Operating system	2N OS	2N OS	2N OS	2N OS	2N OS
Smart home integration	dedicated Control Center screen + up to 9 other HTTP commands	send up to 3 HTTP commands	-	-	-
Video voicemail	✓	-	-	-	-
Video preview	✓	✓	✓	✓	-
Colour variants	black; white	black; white	white	white	black; white
Mounting options	flush; surface; desk stand	flush; surface; desk stand	surface; desk stand	surface; desk stand	flush; desk stand
Dimensions W x H x D	7.60 x 6.18 x 1.97 in (193 x 157 x 50 mm)	5.98 x 6.02 x 1.97 in (152 x 153 x 50 mm)	4.88 x 5.91 x 1.10 in (124 x 150 x 28 mm)	4.88 x 5.91 x 1.10 in (124 x 150 x 28 mm)	7.28 x 5.04 x 1.90 in (185 x 128 x 48.2 mm)
Recommended cabling	Cat5e or higher	Cat5e or higher	Cat5e or higher	1 pair of Cat3 or higher, 24AWG	Cat5e or higher
Power supply	PoE/12V	PoE/12V	12V	2wire-IP	PoE/12V
Integrated speaker	2 W	2 W	2 W	2 W	2 W
Integrated microphone	✓	✓	✓	✓	✓
Digital input (doorbell button)	1	1	1	1	1
Induction loop support	✓ (with external induction loop)	✓ (with external induction loop)	✓ (with the inbuilt induction loop model)	✓ (with the inbuilt induction loop model)	✓ (with external induction loop)
Wi-Fi	✓ (with the Wi-Fi model)	-	-	-	-

Access control readers

	2N Access Unit M For versions please visit the product page 	2N Access Unit 2.0 For versions please visit the product page 
Colour	black	black, silver
RFID reader (optional)	✓	✓
Bluetooth reader (optional)	✓	✓
Touch keypad (optional)	✓	✓
Finger-print reader (optional)	-	✓
QR reader	-	✓
Surface-mount	yes (wall, door frame)	yes (wall, glass)
Flush-mount	-	✓
Number of outputs	2	2
Active switch output	✓	✓
Passive output	✓	✓
Supports HID SEOS cards	-	✓
Supports MIFARE® DESFire® EV2/EV3	✓	✓
Add-on modules	-	✓
Number of components to install	1 (all-in-one)	2-3 (main unit, frame, box)
Tamper switch	✓	✓
Suitable for outdoor use	✓	✓
IP protection	IP55	IP54
IK durability	IK07	IK08
Support for security relay	✓	✓
Dimensions H x W x D (inch)	5.11 x 1.96 x 1.06 (133 mm x 50 mm x 27 mm)	5.11 x 4.21 x 1.10 (1-module, on surface) 9.21 x 4.21 x 1.10 (2-modules, on surface)
PoE power supply	✓	✓
12 V DC power supply	✓	✓

Management platforms

The My2N Management Platform



2N Access Commander



	Apartment buildings	Commercial buildings
Intended use	Cloud	On premise (Virtual Machine or 2N Access Commander Box 2.0 mini PC)
Associated fees	Free apart from premium services (e.g. cloud calling, under specific conditions)	Licenced
Resident/User access credentials	RFID, PIN, WaveKey	RFID, PIN, WaveKey, QR code, fingerprint, licence plate
Visitor access credentials	PIN, QR code	RFID, PIN, QR code, licence plate
Browser based management	✓	✓
Access groups	✓	✓
Access logs	✓	✓
CSV import of users/residents	✓	✓
Device firmware management	✓	✓
Visitor support	✓	✓
Time/date based access rights	-	✓
Anti-passback	-	✓
Occupancy count restriction	-	✓
Live presence list	-	✓
Dashboard widgets	-	✓
Event notifications	-	✓
Device monitoring	-	✓
Door control (Unlock, Hold, Lockdown)	-	✓
System logs	-	✓
Camera logs (image captured on event from compatible intercoms)	-	✓
Log filters and export	-	✓
LDAP/CSV Sync	-	✓
Manager login rights	-	✓
Multi-company support	-	✓
Time and attendance monitoring	-	✓ (Optional add-on licence)
Lift access control	-	✓ (with AXIS A9188 Network I/O Relay Module)
Remote administration	✓ (cloud)	Dependent on network design
Secure login	✓ (MFA, SAML, SSO coming soon - H1 2025)	✓ (2FA via authenticator app)
Lift destination control	✓ (KONE integration)	-

2N Access Commander Licensing/Features

	Trial	Basic	Advanced	Pro	Pro Unlimited
Max users	5	50	300	1000	Unlimited
Max (included) devices	1	5	30	100	Unlimited
Max admins	5	1	5	Unlimited	Unlimited
Access, Event and System logs	✓	✓	✓	✓	✓
Access Rules	✓	✓	✓	✓	✓
API Access	✓	✓	✓	✓	✓
Account enable/disable	✓	✓	✓	✓	✓
Limit failed attempts	✓	✓	✓	✓	✓
Silent alarm	✓	✓	✓	✓	✓
Zone code	✓	✓	✓	✓	✓
Device monitoring	✓	✓	✓	✓	✓
Log management	✓	✓	✓	✓	✓
Import from CSV or device	✓	-	✓	✓	✓
Bulk FW management	✓	-	✓	✓	✓
Multiple authentication support	✓	-	✓	✓	✓
User roles	✓	-	✓	✓	✓
Notifications	✓	-	✓	✓	✓
Presence (mustering)	✓	-	✓	✓	✓
Camera logs	✓	-	✓	✓	✓
Lift (elevator) access control	✓	-	✓	✓	✓
Personalized dashboard	✓	-	✓	✓	✓
Lockdown	✓	-	✓	✓	✓
Mobile credential support	✓	-	✓	✓	✓
Bulk add credentials	✓	-	✓	✓	✓
Reports	✓	-	✓	✓	✓
Visitor management	✓	-	✓	✓	✓
Occupancy management	✓	-	-	✓	✓
Synchronization (LDAP & CSV)	✓	-	-	✓	✓
Anti-passback	✓	-	-	✓	✓
Attendance Monitoring	✓	Optional	Optional	Optional	Optional

Ihre Axis DACH Vertriebsansprechpartner

Account Manager

Deutschland



Thomas Rubis
DE: 4 (exkl. 49), 5
(exkl. 54-56)
Tel: +49 171 58 04 774
thomas.rubis@axis.com



Sonja Simonutti
DE: 2, 3 (exkl. 34-36, 39), 49
Tel: +49 171 41 40 308
sonja.simonutti@axis.com



Lukas Drzymala
DE: 7, 88-89
Tel: +49 170 70 20 228
lukas.drzymala@axis.com



Franziska Berger
DE: 8 (exkl. 88-89), 9 (exkl. 98-99)
Tel: +49 175 43 20 129
franziska.berger@axis.com



Andy Keikus
DE: 34-36, 54-56, 6
Tel: +49 175 83 64 085
andy.keikus@axis.com



Michael Behncke
DE: 34-36, 54-56, 6
Tel: +49 170 195 70 22
michael.behncke@axis.com



Oliver Brombey
DE: 4 (exkl. 49), 5 (exkl. 54-56)
Tel: +49 151 25 36 46 96
oliver.brombey@axis.com



Alarich Pflaumbaum
DE: 7, 88-89
Tel: +49 160 99 58 43 97
alarich.pflaumbaum@axis.com



Anton Jakob
DE: 8 (exkl. 88-89), 9
(exkl. 98-99)
Tel: +49 151 72 85 20 57
anton.jakob@axis.com



Torsten Kasten
DE: 8 (exkl. 88-89), 9
(exkl. 98-99)
Tel: +49 171 587 42 45
torsten.kasten@axis.com



Sven Winnicki
DE: 0, 39, 98-99
Tel: +49 160 90 62 59 00
sven.winnicki@axis.com

Key Account Manager

Deutschland



Torsten Lange
DE: 1
Tel: +49 171 22 40 323
torsten.lange@axis.com



Thorsten Giesecke
DE: 2, 3 (exkl. 34-36, 39), 49
Tel: +49 160 289 99 38
thorsten.giesecke@axis.com

Account Manager

Österreich



Roman Plass
Tel: +43 664 84 18 981
roman.plass@axis.com

Key Account Manager

Österreich



Georg Trojan
Tel: +43 676 93 20 830
georg.trojan@axis.com

Account Manager

Schweiz



Juan Garcia
Tel: +41 79 925 39 06
juan.garcia@axis.com

Key Account Manager

Schweiz



Sime Marusic
CH: 53-56, 63-69, 7, 8, 9
Tel: +41 78 920 51 20
sime.marusic@axis.com



Bertrand Schütz
CH: 1, 2, 3, 4, 50-52, 57, 60-62
Tel: +41 79 834 38 18
bertrand.schuetz@axis.com

Vertriebsinnendienst



Anke Sperger
DE: 0, 1, 2, 3 (exkl. 32-36),
49, 98-99
Tel: +49 89 3588 17 - 226
anke.sperger@axis.com



Ulrich Koch
DE: 32-33, 4 (exkl. 49),
5 (exkl. 54-56)
Tel: +49 89 3588 17 - 213
ulrich.koch@axis.com



Matthias Mählen
DE: 34-36, 54-56, 6, 7, 88-89
Tel: +49 89 3588 17 - 229
matthias.maehlen@axis.com



Hanna Jautz
DE: 8 (exkl. 88-89),
9 (exkl. 98-99)
Tel: +49 89 3588 17 - 223
hanna.jautz@axis.com



Giulia Serra
Schweiz
Tel: +41 78 345 49 41
giulia.serra@axis.com



Technischer Support

Hotline Deutschland
01805 294778
(€ 0,14/Min/Festnetz)

Hotline Schweiz
0848 294724
(CHF 0,08/Min/Festnetz)

Hotline Österreich
0820 201213
(€ 0,20/Min/Festnetz u.
Mobilfunk)

Vertriebsshotline

Deutschland
+49 89 3588 17 276

Schweiz
0800 559949

Österreich
0800 297862

**Axis Communications
GmbH**

**Adalperostr. 86
85737 Ismaning bei München
Deutschland
Tel: +49 89 3588 17 0
Fax: +49 89 3588 17 269**

Axis Experience Center

Audiolösungen



Bodycam



Zubehör



Kontrollraum



Einzelhandel



Zutrittskontrolle



Besuchen Sie unser Axis Experience Center in Ismaning bei München und entdecken Sie die zahlreichen Möglichkeiten, die Axis Produkte bieten!

Axis Communications GmbH

Adalperstr. 86
85737 Ismaning bei München
Deutschland
Tel: +49 89 3588 17 0
Fax: +49 89 3588 17 269

Vertriebspartnerprogramm - **Klare Umsatzvorteile.**

Das Vertriebspartnerprogramm von Axis Communications ist so konzipiert, dass Systemintegratoren, Fachhändler (Value Added Reseller, VAR) und Installateure die führende Marktposition von Axis geschäftlich nutzen können. Da wir unserem Vertriebsnetz einen hohen Stellenwert einräumen, betrachten wir unsere Partner als natürliche Erweiterung unseres Teams. Sie spielen eine Schlüsselrolle bei unserer Marktstrategie und dem Gesamterfolg unseres Unternehmens. Zu den Vorzügen dieses Programms gehören eine rabattierte Demoausrüstung (nicht zum Wiederverkauf), höhere Gewinnmargen, Schulungen für Fachleute und Mitarbeiter in Technik und Vertrieb durch die Axis Communications Academy. Sie bieten den Vertriebspartnern von Axis klare Vorteile im Wettbewerb.



- > Attraktive Gewinnspannen und gezielte Unterstützung bei der Projektpreisgestaltung
- > Exklusive Sonderkonditionen auf Demoausrüstung (nicht für den Wiederverkauf, NFR)
- > Kompetenzerweiterung im Bereich Netzwerk-Video durch praxisnahe Trainings und Fachwissen
- > Profitieren Sie von der Marktführerschaft von Axis und dem starken Axis Partnernetzwerk
- > Effizienter Vertrieb durch gezielte Tools und wirkungsvolle Marketingunterstützung

Partnerkategorie und -ebenen

Das Vertriebspartnerprogramm von Axis richtet sich an Unternehmen, die derzeit eine Geschäftsbeziehung zu einem autorisierten Axis Distributor unterhalten oder aufbauen wollen. Es gibt drei Ebenen der Partnerschaft mit klaren Vorzügen und Anforderungen, die darauf ausgelegt sind, den beiderseitigen Erfolg zu fördern und die Investition unserer Partner in den Vertrieb von Axis Produkten zu belohnen.

	Authorized	Solution Silver	Solution Gold
ANFORDERUNGEN AN PARTNER			
Als Axis Certified Professional zertifizierte Mitarbeiter ³	Empfohlen	Min. 1 pro Land	Min. 2 pro Land
Kauf bei einem autorisierten Axis Distributor ⁴	◆	◆	◆
Angebot von Komplettlösungen und Demoausrüstung		◆	◆
Angebot von Installationen vor Ort und Erstsupport	◆	◆	◆
Ertragsziele		Gemäß den Allgemeinen Geschäftsbedingungen	Gemäß den Allgemeinen Geschäftsbedingungen



Vertriebspartnerprogramm - Klare Umsatzvorteile.

	Authorized	Solution Silver	Solution Gold
VERTRIEBSUNTERSTÜTZUNG			
Zugang zu Professional Services Team (je nach Geschäftsszenario und mit Entwicklungskosten verbunden)	◆	◆	◆
Spezialisierte Unterstützung vor und nach dem Verkauf		◆	◆
Rabatt auf die UPE für Demoausrüstung und Vorführprodukte (nicht zum Wiederverkauf, NFR) ¹	◆	◆	◆
Zugang zu Axis Spezialisierungen	◆	◆	◆
Zugang zum Axis Loan Program für kostenlose Testprodukte ³	◆	◆	◆
Chancen auf bessere Margen ¹	◆	◆	◆
Priorisierung bei gemeinsamer Lead-Bearbeitung		◆	◆
Möglichkeit zur Projektpreisbildung ¹	◆	◆	◆
Sicherer Zugang zum Axis Partnerweb mit exklusiven Informationen und Tools zur Geschäftsentwicklung	◆	◆	◆
Nutzung der Axis Experience Center für interne Aktivitäten wie Schulungen, Meetings oder Events ³	◆	◆	◆
Nutzung der Axis Integrator Suite	◆	◆	◆
Nutzung des AXIS Site Designer	◆	◆	◆
MARKETING-UNTERSTÜTZUNG			
Erweiterte Möglichkeiten für Co-Marketing			◆
Partnerzertifikat	◆	◆	◆
Nutzung der Axis Experience Center für Kundenaktivitäten wie Schulungen, Meetings oder Events ³	◆	◆	◆
TECHNISCHER SUPPORT			
Zugang zu Softwareentwicklern, Technologieanbietern und Beratern aus dem Axis Partnernetzwerk	◆	◆	◆
Zugang zum Sales Engineering Support		◆	◆
Vorab-Austausch-Service ²	◆	◆	◆
Bevorzugter technischer Support		◆	◆
Nutzung der Axis Technical Services	◆	◆	◆
SCHULUNGSSUPPORT			
Teilnahme am Axis Zertifizierungsprogramm zum Axis Certified Professional ³	◆	◆	◆
Zugriff auf professionelle Schulungen der Axis Communications Academy	◆	◆	◆
Rabatte auf Kurse der Axis Communications Academy ³	20 %	40 %	60 %
Maßgeschneiderte Schulungen entsprechend den spezifischen Anforderungen ³			◆

¹ Axis unterstützt Distributoren mit Partnerrabatten, die sich nach der Partnerstufe richten. Der tatsächliche Kaufpreis wird von Ihrem Distributor festgelegt.

² Gegebenenfalls kann eine Servicegebühr anfallen. Kostenfreie Wartung bei unternehmenskritischen Installationen. Wenden Sie sich zur Fehlerbehebung und Autorisierung an den Axis Helpdesk.

³ Soweit verfügbar. Je nach lokaler Verfügbarkeit und geltenden Bedingungen.

⁴ Partner müssen Axis die Kontonummern ihrer derzeitigen Distributoren mitteilen.

Ein Partner für die Zukunft!

Registrieren Sie sich jetzt unter www.axis.com/partner, und werden Sie Vertriebspartner von Axis.



Customer stories



CUSTOMER STORIES | INDUSTRIE UND FERTIGUNG

Intelligentes Parksystem für zukunftsfähige Mobilität

Organisation: fair parken GmbH, Düsseldorf

Die fair parken GmbH gehört zu den führenden Anbietern für digitales Parken in Deutschland und entwickelt seit über zehn Jahren intelligente Lösungen zur Parkraumbewirtschaftung. Ein wichtiger Baustein sind kamerabasierte Systeme von Axis Communications, die eine KI-gestützte Kennzeichenerkennung sowie automatisierte Backend-Prozesse ermöglichen. Mit dem ticketlosen „FreeFlow“-System wird der gesamte Parkvorgang digital erfasst und bequem abgewickelt. Ziel ist eine effizientere Nutzung von Parkflächen, optimierte Verkehrsflüsse und die Reduzierung von CO₂-Emissionen. Datenschutz und Nachhaltigkeit stehen dabei stets im Fokus.

MEHR INFO

www.axis.com/de-de/customer-story/smart-parking-system



CUSTOMER STORIES | GESUNDHEITSWESEN

Digitale Zutrittskontrolle für kritische Infrastruktur

Organisation: BRK Landkreis Wunsiedel, Marktredwitz

Als Teil der kritischen Infrastruktur hat das BRK Landkreis Wunsiedel seine schlüsselbasierte Zutrittskontrolle durch eine moderne digitale Lösung ersetzt. Gemeinsam mit Axis Communications und Assa Abloy entstand ein flexibel skalierbares, online- und funkbasiertes Zutrittssystem. Über AXIS Camera Station Secure Entry lassen sich Zutrittsrechte zentral und in Echtzeit verwalten. Besonders sensible Bereiche, etwa der Medikamentenzugang, werden zuverlässig abgesichert. Die Lösung erhöht Sicherheit, Transparenz und erfüllt höchste DSGVO-Anforderungen.

MEHR INFO

www.axis.com/de-de/customer-story/bavarian-red-cross-enhances-security-axis-assa-abloy-access-control

Customer stories



CUSTOMER STORIES | INDUSTRIE UND FERTIGUNG

KI-gestützte Qualitätsprüfung in der Fahrzeugproduktion

Organisation: BMW Group, München

Im Rahmen des Digitalisierungsprojekts BMW iFACTORY setzt die BMW Group auf KI-basierte Bildverarbeitung zur automatisierten Qualitätsprüfung. Hochauflösende Netzwerk-Kameras von Axis erfassen entlang der Produktionslinien präzise Bild- und Videodaten. Diese werden in Echtzeit von der Plattform AIQX analysiert, um selbst kleinste Fehler frühzeitig zu erkennen. Dadurch steigen Qualität, Effizienz und Wirtschaftlichkeit der Produktion. Gleichzeitig erfüllen die Lösungen hohe Anforderungen an Cybersecurity und Nachhaltigkeit.

MEHR INFO

www.axis.com/de-de/customer-story/axis-industrial-vehicle-production



CUSTOMER STORIES | GASTGEWERBE

Sicherheit und Panorama am Großen Arber

Organisation: ARBER-BERGBAHN e.K., Bayerischer Wald

Die Arber Bergbahnen setzen rund 75 Netzwerk-Kameras und Lautsprecher von Axis Communications zur Überwachung ihres weitläufigen Geländes ein. Liftanlagen, Skipisten, Parkplätze und technische Bereiche werden zentral und mobil überwacht. Die Video Management Software AXIS Camera Station sorgt für eine einfache Verwaltung und hohe Transparenz. Zusätzlich stehen ausgewählte Kamerabilder den Besuchern als Live-Ausblicke im Internet zur Verfügung. Das System verbessert sowohl die Sicherheit als auch die Effizienz im laufenden Betrieb.

MEHR INFO

www.axis.com/de-de/customer-story/hightech-im-schnee-grosser-arber-setzt-auf-ip-kameras-fur-sicherheit-und-ausblick

About Axis Communications

Axis enables a smarter and safer world by improving security, safety, operational efficiency, and business intelligence. As a network technology company and industry leader, Axis offers video surveillance, access control, intercoms, and audio solutions. These are enhanced by intelligent analytics applications and supported by high-quality training.

Axis has around 5,000 dedicated employees in over 50 countries and collaborates with technology and system integration partners worldwide to deliver customer solutions. Axis was founded in 1984, and the headquarters are in Lund, Sweden.

Distributed by: