





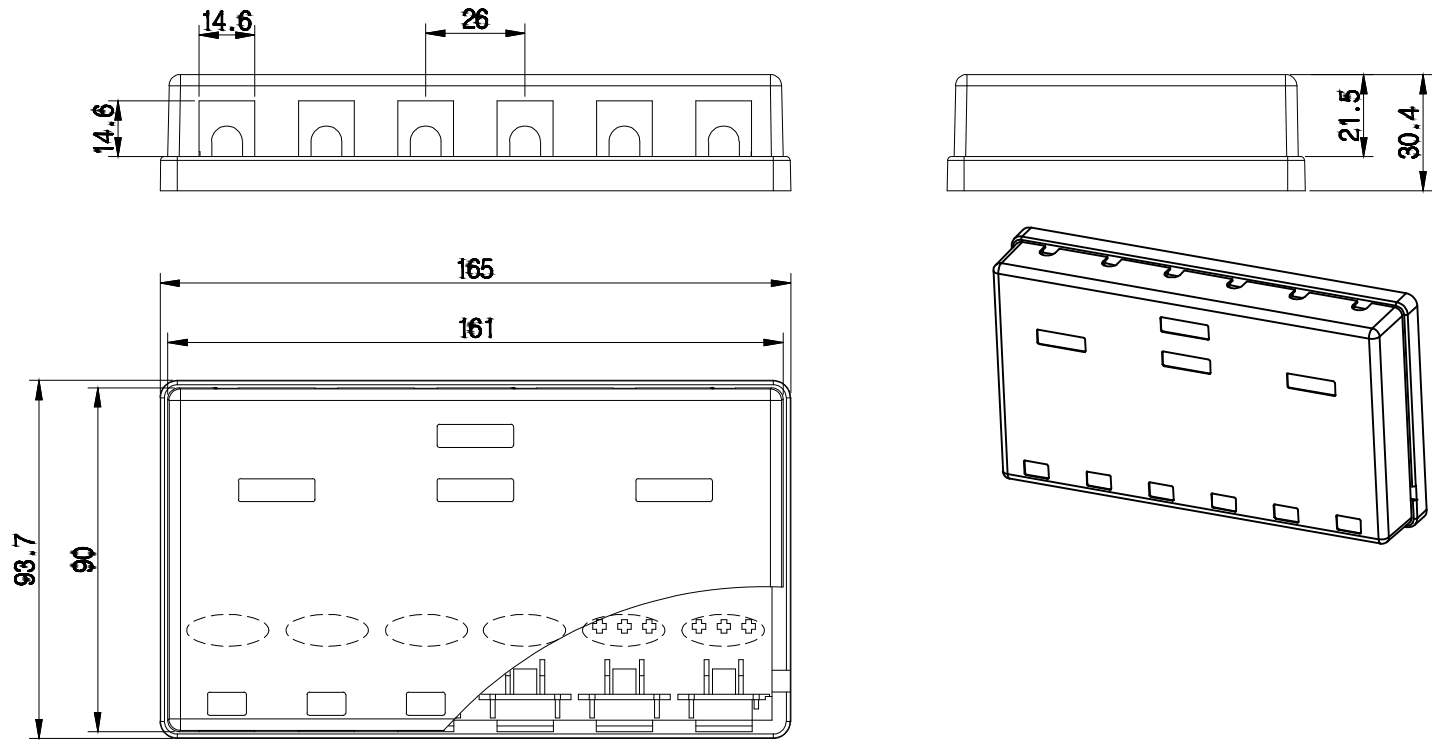


- MATERIAL LIST:
- 1.wall box: ABS
 - 2.Accessories
 - cable tie: 6PCS 2.5*80MM
 - SCRW: 3PCS ST4*20MM
 - 3.Applicable cable diameter:OD 8.2MM Max
 - 4.ROHS 2.0 AND REACH COMPLIANT

						SYNERGY 21				
						CUSTOMER			ITEM NO.	S216343
						PRODUCT NAME	6 port wall box	manufacture country:	CHINA	UNIT MM
		NEW		2017-04-21	A	DRAWNBY	CHECKBY	APPOBY	DATE	
BY	CHK	REVISION RECORD MODIFICATIONS			DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2017-04-21



16.5±0.2

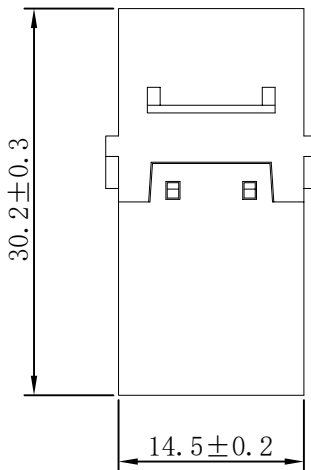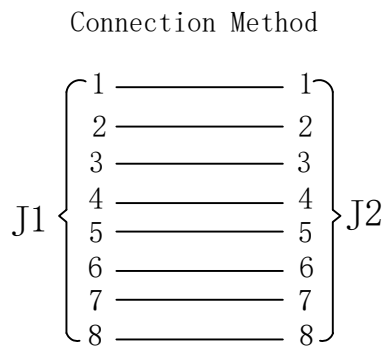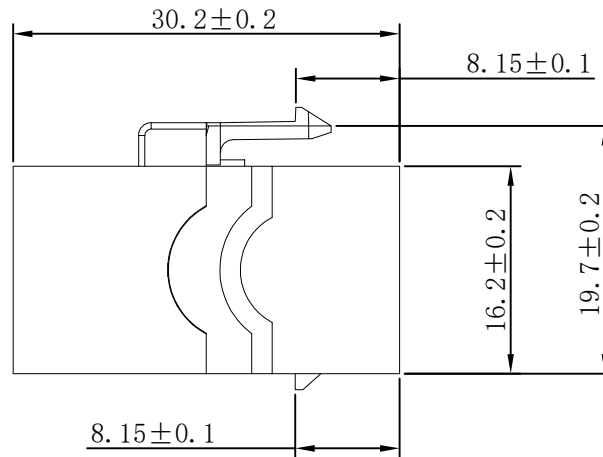

NOTES:

ELECTRICAL:

- Contact Resistance : 20MΩ MAX
- Insulation Resistance : 500MΩ MIN @ 500V DC
- Withstand Voltage : DC 1000V AC 700V RMS 60Hz, 1MIN
- Component testing for Cat.6A to ISO/IEC 11801 Ed.2.2:2011-06
DIN EN 50173-1:2011-09
TIA/EIA-568.2-D (2009-08)

ENVIRONMENTAL:

- Storage : -40℃ T0+70℃
- Operation : -10℃ to+60℃

MECHANICAL

- RJ45 Contact Life: 750 Times Min
- Plug inforce:<30N

RoHS 2.0 and REACH Compliant

PACKING:1PCS/PE bag+lable1,10PCS/PE Bag+Lable 2, 50PCS/small box,xxPCS/CTN+LABLE 3

MATERIAL LIST:

④	Shrapnel	PC White	1	
③	Contact	8P8C Gold Plated	16	
②	Housing	Zinc Alloy	1	
①	PCB	FR-4, t=0.8	1	
NO	MAT. NAME	DESCRIPTION	QT'Y	REMARK

					PRODUCT NAME	CAT.6A STP RJ45 F/F Coupler Keystone jack Type Zinc Alloy Housing	manufacture country:	CHINA	UNIT	MM
		NEW	2025-4-2	AO	DRAWNBY	CHECKBY	APPOBY	DATE		
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2025-4-2		

REVISION RECORD MODIFICATIONS