
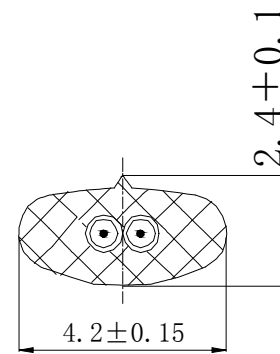


WIRING DIGRAM

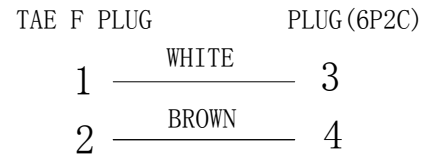

- NOTE
1. Operating Temperature: -20 ~ +60° C
 2. RoHS 2.0 AND REACH Compliant
 3. 100% OPEN, SHORT AND MISWIRE TEST

MATERIAL LIST:

5	PLUG	6P2C PLATE GOLD 3U" Transparent	1	
4	CABLE	28AWG 7/0.12 CCS*2C OD:0.98mm JACKET:PVC/BLACK OD:4.2*2.4mm	1	
3	MOLDING	PVC COLOR:BLACK	1	
2	TAE F PLUG	ABS BLACK	1	
1	TAE F SHELL	ABS BLACK	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK
		NEW	2020-08-03	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

SYNERGY 21				
CUSTOMER	AN		ITEM NO.	188865
PRODUCT NAME	TAE F PLUG TO PLUG (6P2C)	UNO ITEM NO.	445251	UNIT MM
DRAWNBY	CHECKBY	APPOBY	DATE	
ARVIN	ALVAN		2020-08-03	