

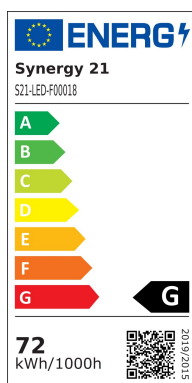


Synergy 21 Tira LED Flex DC24V/72W, RGB, Positivo, IP68, 5m

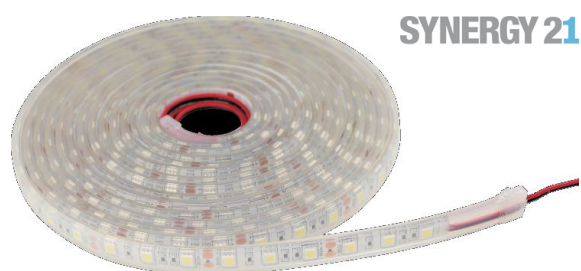

| | |
|------------------------------|------------|
| kwh/1000h: | 72,00 |
| Lúmenes: | 2550 |
| Vatio: | 72,0 |
| Vida útil nominal: | 35000 Std. |
| Ciclos de conmutación: | 50000 |
| Temperatura ambiente óptima: | 25 °C |



Características técnicas:

- Alimentación: DC24V/3A/72W
- Número de LEDs: 300 SMD5050
- Flujo luminoso: Rojo: 120lm; Verde: 240lm; Azul: 150lm
- Ángulo de enfoque: 120°
- Color PCB: Beis
- Dimensiones: 5000 x 14 x 6mm
- Protección: IP68
- Polo positivo
- Se puede cortar cada 6 SMD

Atributos

| Atributo | Valor |
|--------------------------|-----------------------|
| Abstrahlwinkel: | 120 |
| Ampere: | 3 |
| CC oder CV: | CV |
| Dimmbar: | abhängig vom Netzteil |
| EPREL_ANTI_GLARE_SHIELD: | false |

| Atributo | Valor |
|-------------------------------------|----------------|
| EPREL_BEAM_ANGLE: | Not applicable |
| EPREL_BEAM_ANGLE_CORRESPONDENCE: | SPHERE_360 |
| EPREL_CHROMATICITY_COORD_X: | 0.000 |
| EPREL_CHROMATICITY_COORD_Y: | 0.000 |
| EPREL_CLAIM_EQUIVALENT_POWER: | false |
| EPREL_COLOUR_TUNEABLE_LIGHT_SOURCE: | false |
| EPREL_CONNECTED_LIGHT_SOURCE: | false |
| EPREL_CORRELATED_COLOUR_TEMP_TYPE: | RANGE |
| EPREL_DIMENSION_DEPTH: | 0 |
| EPREL_DIMENSION_HEIGHT: | 0 |
| EPREL_DIMENSION_WIDTH: | 0 |
| EPREL_ENERGY_CONS_ON_MODE: | 0 |
| EPREL_EQUIVALENT_POWER: | Not applicable |
| EPREL_HIGH_LUMINANCE_LIGHT_SOURCE: | false |
| EPREL_LUMEN_MAINTENANCE_FACTOR: | 0.98 |
| EPREL_LUMINOUS_FLUX: | 0 |
| EPREL_MAX_BEAM_ANGLE: | Not applicable |
| EPREL_MIN_BEAM_ANGLE: | Not applicable |
| EPREL_POWER_ON_MODE: | 0.0 |
| EPREL_POWER_STANDBY: | 0.00 |
| EPREL_REGISTRANT_NATURE: | MANUFACTURER |
| EPREL_SURVIVAL_FACTOR: | 1.00 |
| Länge: | 5 |
| LED Strip Klebeband: | ja |
| LED Strip Breite: | 12 |
| LED Strip Höhe: | 5 |
| LED Strip Klebeband: | ja |
| LED Strip kürzbar: | 100 |
| LED Strip Länge: | 5000 |
| Lichtfarbe: | RGB |
| Lichtfarbe Name: | RGB |

| Atributo | Valor |
|---------------|-------------|
| Schutzklasse: | IP68 |
| Volt: | 24 |
| Peso: | 0.515 Kg |
| Garantía: | 24.00 Meses |

Accesorios

| Número de artículo | Denominación |
|--------------------|--|
| 81069 | Synergy 21 Enchufe DC con borne de tornillo |
| 81068 | Synergy 21 Conector DC con borne de tornillo |
| 81741 | Synergy 21 Clip fijación de silicona para tiras LED, Pack de |
| 93680 | Mean Well HLG-80H-24 Alimentación 24V/80W IP65 Regulable |
| 93682 | Mean Well HLG-150H-24 Alimentación 24V/150W IP65 Regulable |
| 148726 | Synergy 21 Outdoor Kabelverbinder IP68 1:1 |
| 148727 | Synergy 21 Outdoor Kabelverbinder IP66 1:2 |
| 148730 | Synergy 21 Outdoor Kabelverbinder IP66 Box 3 Ports |
| 148729 | Synergy 21 Outdoor Kabelverbinder IP68 Box 3 Ports transparent |
| 148728 | Synergy 21 Netzteil - Wasserdichte Verbinder Box 4 Ports |
| 183258 | Shelly RGBW2 Relé Wi-Fi |