
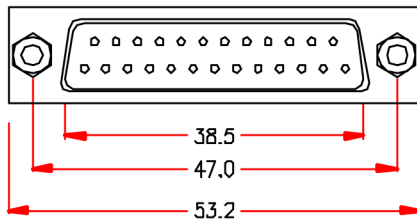
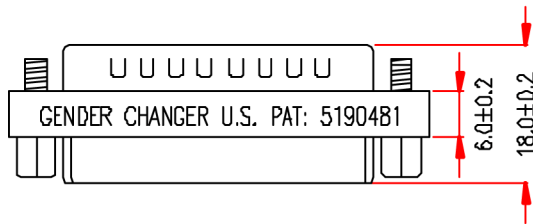


**MINI GC 25M-F**



**SPECIFICATION:**

1. VOLTAGE RATING: 300V AC(rms).
2. CURRENT RATING: 5 AMP CONTINUOUS
3. DIELECTRIC STRENGTH 1000VAC
4. CONTACT RESISTANCE: 10 m Ohm min
5. INSULATION RESISTANCE: 5000 m Ohm min
6. DURABILITY: 30 CYCLEES FOR GOL FLASH  
150 CYCLES FOR 15u" GOLD PLATED
7. CORROSION RESISATANCE: MEET M-STD-202F METHOD  
101 CONITION BSALT WATER  
SPRAY OR GOLD PLATED OVER 15u"
- 8.MATING FORCE INSERTION FORCE: OZ-16 OZ  
AVERAGE 150 GRAM  
EXTRACTION FORCE: 1KG MIN

PART NO. 0028		Revision:		Cable Length Unless Other Spec. Tolerances: 0 ~0.2M ±0.01M 0.21~1.0M ±0.02M 1.1 ~1.5M ±0.025M 1.51~2.1M ±0.03M 2.1M ↑ ±0.04M
APPROVED				
CHECKED	<b>JOAN</b>			
DRAWING	<b>SDW</b>	ITEM NO.	<b>EB414MF</b>	