



### HOT-SWAPPABLE EXTENDED BATTERY MODULE WITH BUILT-IN CHARGER TO PROLONG RUNTIME

#### The hot-swappable battery module achieves constant recharge time without resorting to UPS's power



Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. With the built-in charger design, the EBMs can charge directly from utility without resorting to UPS, significantly saving total charging time when charging multiple EBMs. The products also feature hot-swappable battery packs, allowing users to safely remove and replace battery packs without affecting connected loads.

#### SERIES FEATURES

- Rack/Tower Convertible Configurations
- Sealed Lead-acid Batteries
- Built-in charger for Extended Battery Module (EBM)
- Hot-swappable Batteries
- EBM Expansion Capability
- Metal Housing

#### PRODUCT CALLOUTS

- 1 . AC Inlet
- 2 . Input Circuit Breaker
- 3 . AC Outlet
- 4 . Extended Battery Module Connector Plug
- 5 . Extended Battery Module Connector Socket
- 6 . On-Board Replaceable Fuse Cover
- 7 . BM Port

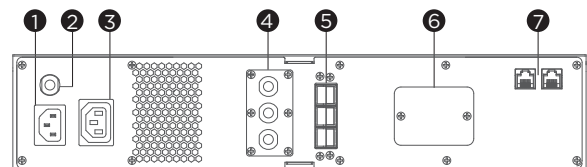

BP48VP2U03

#### TECHNICAL SPECIFICATIONS

Model Name	BP48VP2U03
<b>General</b>	
Nominal Output Voltage (Vdc)	48
Rated Output Current (A)	70
<b>Battery</b>	
Battery Type	Sealed Lead-acid
Built-in Charger	Yes
Typical Recharge Time (Hours)	6
User-replaceable	Yes
Hot-swappable	Yes
Replacement Battery Pack	RBP0130
Replacement Battery Pack Quantity (pcs)	2
Compatible UPS Models	PR2200ERTXL2UA, PR3000ERTXL2UA
<b>Physical</b>	
Form Factor	Rack/Tower
<b>Physical Size</b>	
Dimensions (WxHxD) (mm.)	433 x 86.5 x 630
Weight (kg.)	41.1
Installed Rack Height (U)	2
<b>Environmental</b>	
Operating Temperature (°C)	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 95
<b>Certifications</b>	
Certifications*	CE, FCC Class B, UL, VCCI
RoHS	Yes

\*Certifications may vary according to different regions. Visit [www.cyberpower.com](http://www.cyberpower.com) for more information.  
#All specifications are subject to change without notice.