


REV. A0	REVISED DESCRIPTION FIRST RELEASE	DATE 2019/11/23	CHECKED
---------	--------------------------------------	--------------------	---------

Length

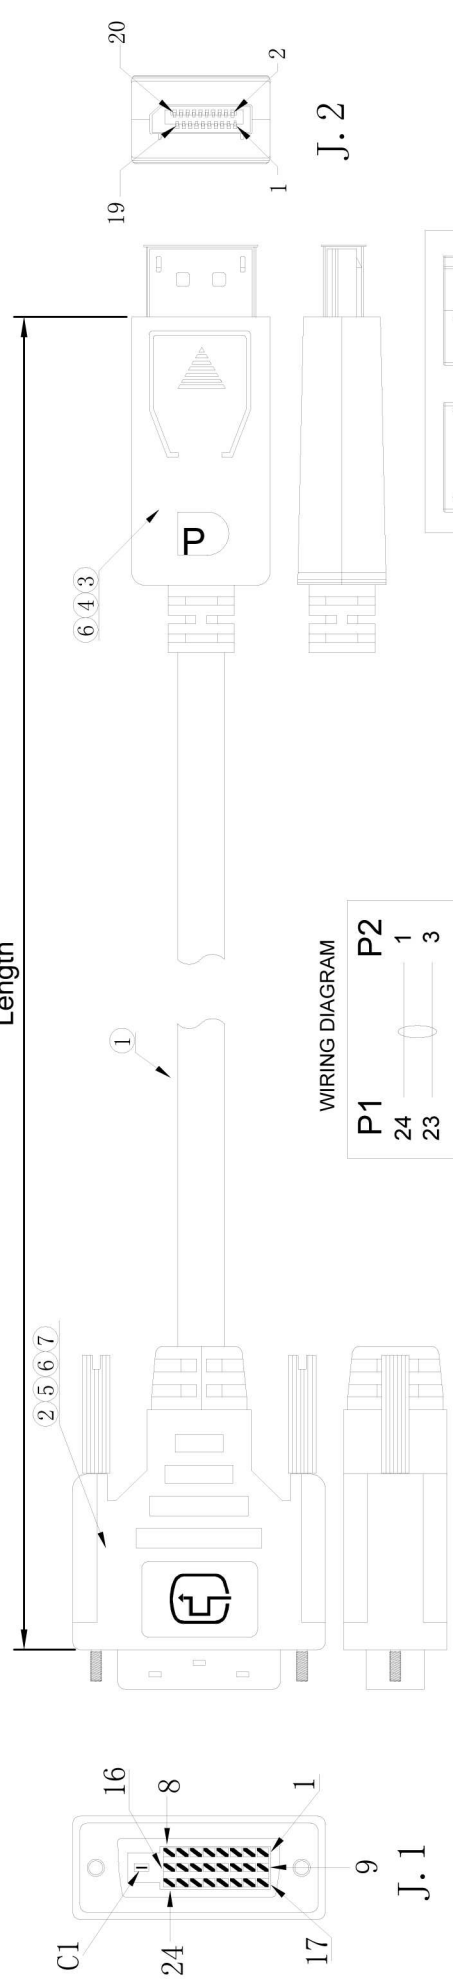


WIRING DIAGRAM

P1	P2
24	1
23	3
9	7
10	9
7	15
16	19
14	18
17	4
18	6
1	10
2	12
6	16
Shell	Shell

- Remarks
- 1.100% Open/Short Test
 - 2.Conductive Resistance:5ohms MAX
 - 3.Insulation Resistance:10M ohm MIN.
 - 4.HI-POT:DC 300V/10MS.
 - 5.The product is RoHS compliant.
 - 6.Support 1080P@60Hz

Item NO.	Length(m)
K5564SW.1V2	1.0m
K5564SW.2V2	2.0m
K5564SW.3V2	3.0m
K5564SW.5V2	5.0m

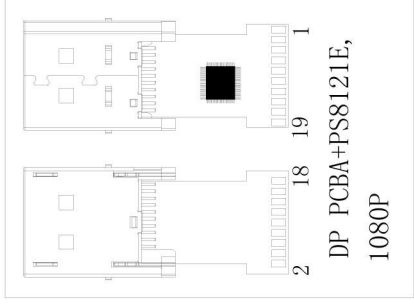

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑦	External Mold	1PC	
⑥	Inneral Mold	1PC	
⑤	SCR	2PCS	
④	Shell	1PC	
③	Connector	1PC	
②	Connector	1PC	
①	Cable		
	Outer Mould 45P PVC, Black Inner Mould PE Screw: φ2.3x47mm DP Male Plastic Shell, Black w/ "D" DP male head hook + PCBA with IC(PS8121E), Gold-Plated DVI 24+1P Male, Gold-Plated UL20276 (30AWG 7/0.10TC*1P+AL+MY)*5 +30AWG(7/0.10TC*4C)+AL+D(7/0.10BC)+B(96/0.12AL) + OD6.0mm PVC, Black		

ERP NO.:	SAMPLE DWG NO.:	REVISION	A0	UNIT	mm	SCALE	NO	PAGE NO	1/1	DATE	2019/11/23
DOC No.:	CUSTOMER:	CUSTOMER P/N:	DESCRIPTION	DP M - DVI24+1 M 30AWG	APPROVAL	CHECKED	DRAWN				

TOLERANCES UNLESS OTHERWISE STATED
 X = ±0.1
 XX = ±0.01