



Número de artículo: 209904  
Número de fabricante: ALL-SG8310v2PM

## ALLNET Switch smart managed Layer2 10 Port • PoE Budget 140W • 8x PoE at • 2x SFP • 19" • Fanless • ALL-SG8310v2PM

>>> [Al artículo de la tienda](#)



### EAN CODE



## ALLNET Switch smart managed Layer2 10 Port • PoE Budget 140W • 8x PoE at • 2x SFP • 19" • Fanless • ALL-SG8310v2PM

### Highlights:

- 8-port 10/100/1000Mbps with full PoE support
- 2x SFP slots for optional MiniGBICS
- PoE power 4x a' 30 Watt (IEEE802.3at or 8x IEEE802.3af)
- FANLESS DESIGN with internal power supply unit
- Jumbo Frames and IGMP Snooping Support
- Link Aggregation and Rapid Spanning Tree
- IEEE802.1q VLAN tagging and 802.1p priority queues
- PoE budget 140 W

The ALL-SG8310v2PM is an 8-port 10/100/1000Mbps switch with PoE support on all ports, perfect for segmenting larger networks. It is an excellent choice to provide your network with more power and efficiency.

### IEEE 802.3af&at Power over Ethernet (PoE).

The ALL-SG8310v2PM supports IEEE 802.3at PoE standard on 4 ports ports with up to 30W power per port for the connected PoE end devices, or full IEEE802.3af power on 8 ports with up to 15.4W. The maximum PoE budget is 140W. The ALL-SG8310v2PM uses the existing LAN cabling for the power supply. This facilitates the installation of PoE end devices such as WLAN access points, IP cameras, VoIP telephones and much more, as no consideration has to be given to power sockets during placement. The PoE ON/OFF function allows the administrator to conveniently reset the end devices remotely by turning off the PoE power supply for each


individual port.

**High-Speed Networking/Jumbo Frames Support**

The ALL-SG8310v2PM provides an excellent solution for expanding your Gigabit network. With Gigabit speed, this product offers high flexibility and bandwidth for connectivity to servers, workstations and other connected devices. In addition, it also supports 9.6K jumbo frames for better network utilization, which greatly improves the transfer of large files.

**Extensive management/administration features**

Modern applications for video surveillance with IP cameras and Voice over IP are increasingly replacing classic analog technologies. This also increases the demands on the network infrastructure. The ALLNET ALL-SG8310v2PM is equipped with many management and security functions for all modern communication scenarios. IGMP Snooping, Tagged VLAN, Quality of Service, Port Trunking, Flow Control, Storm Control, Link Aggregation, IEEE802.1x, SNMP v1/ v2c and Spanning Tree are only a small excerpt from the extensive feature portfolio of the ALL-SG8310v2PM. For more details see Technical Details.

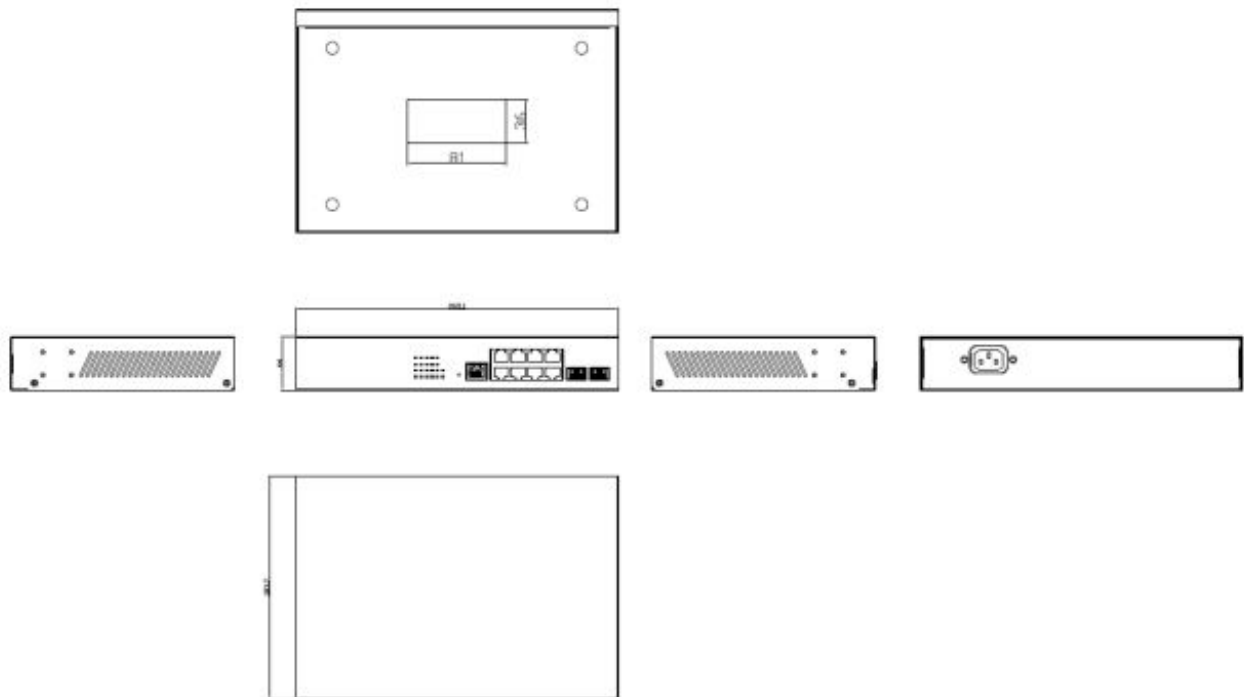

**Technical Details:**

Items	Specifications



Número de artículo: 209904  
Número de fabricante: ALL-SG8310v2PM

<b>Model No.</b>	ALL-SG8310v2PM
<b>Key Components</b>	RTL8382M Flash IC:16MB DDR: 1Gb IP808AR PSE controller
<b>I/O ports</b>	8x GbE ports, RJ45 2 x SFP Giga ports Reset Button: reset to default setting, re-start system Console port by RTJ45 Type
<b>PoE ports</b>	Port# 1~ 8 IEEE802.3at, IEEE802.3af
<b>LED Define</b>	<p>PWR/SYS: Green LED</p> <ul style="list-style-type: none"><li>• Off: power off or fail</li><li>• On: power on</li><li>• Blinking: system booting up</li></ul> <p>PoE Alert: Green LED</p> <ul style="list-style-type: none"><li>• Off: No over PoE Max power Alert</li><li>• On: Over PoE Max power Alert</li></ul> <p>Port LED:</p> <p>Link/ACT:</p> <ul style="list-style-type: none"><li>• Off: port disconnected or link fail</li><li>• Green on: 10/100/1000Mbps connected</li><li>• Blinking: sending or receiving data</li></ul> <p>PoE:</p> <ul style="list-style-type: none"><li>• Off: PoE power output off</li><li>• Green on: PoE power output on</li></ul> <p>SFP:</p> <ul style="list-style-type: none"><li>- Off: disconnected or fail</li><li>- Green: 100/1000Mbps connected</li></ul>



	- Blinking: data transmitting																								
<b>HW feature</b>	<p>IEEE802.3 10BASE-T</p> <p>IEEE802.3u 100BASE-TX</p> <p>IEEE802.3ab 1000BASE-T</p> <p>IEEE802.3az EEE</p> <p>IEEE802.3at, IEEE802.3af</p> <p>MAC address Table: 8K</p> <p>Packet buffer size: 4.1M</p> <p>Jumbo Frame: 9K bytes</p>																								
<b>Console</b>	Support Cisco-like CLI command																								
<b>Security</b>	DT Security circuit.																								
<b>PoE power pin-out</b>	Alternative A (Pin 1,2/3,6)																								
<b>PoE Output power capacity</b>	<p>Maximum output :30W per each port</p> <ol style="list-style-type: none"> <li>1. Compliant with IEEE802.3af/at standard, Following IEEE802.3at/at to support PoE or PoE+</li> <li>2. Automatically discover the connection of PD device and immediately sends power to it</li> <li>3. Auto disable port if the port current is over 700mA or short happens</li> <li>4. Priority default setting is lower port NO. has high priority</li> <li>5. The maximum power used by power devices is defined by the following classification. When Port works in Auto Mode, the output port power limit will be associated with PD classification Value.</li> </ol> <table border="1"> <thead> <tr> <th>Class</th> <th>Usage</th> <th>Minimum Power Levels Output at the PSE</th> <th>Maximum Power Levels at the Powered Device</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Default</td> <td>15.4W</td> <td>0.44 to 12.95W</td> </tr> <tr> <td>1</td> <td>Optional</td> <td>4.0W</td> <td>0.44 to 3.84W</td> </tr> <tr> <td>2</td> <td>Optional</td> <td>7.0W</td> <td>3.84 to 6.49W</td> </tr> <tr> <td>3</td> <td>Optional</td> <td>15.4W</td> <td>6.49 to 12.95W</td> </tr> <tr> <td>4</td> <td>Optional</td> <td>30W</td> <td>12.95W to 25.5W</td> </tr> </tbody> </table> <ol style="list-style-type: none"> <li>1. Follow the standard PSE pin-out standard of Alternative A (MAD-X) which is sending out</li> </ol>	Class	Usage	Minimum Power Levels Output at the PSE	Maximum Power Levels at the Powered Device	0	Default	15.4W	0.44 to 12.95W	1	Optional	4.0W	0.44 to 3.84W	2	Optional	7.0W	3.84 to 6.49W	3	Optional	15.4W	6.49 to 12.95W	4	Optional	30W	12.95W to 25.5W
Class	Usage	Minimum Power Levels Output at the PSE	Maximum Power Levels at the Powered Device																						
0	Default	15.4W	0.44 to 12.95W																						
1	Optional	4.0W	0.44 to 3.84W																						
2	Optional	7.0W	3.84 to 6.49W																						
3	Optional	15.4W	6.49 to 12.95W																						
4	Optional	30W	12.95W to 25.5W																						



Número de artículo: 209904  
 Número de fabricante: ALL-SG8310v2PM

	power over number 1,2,3,6 pins of 8 wires of Ethernet CAT5 UTP cable
<b>Power Input</b>	Internal power supply Input: 100-240V AC Output: 180W
<b>PoE Power Budget</b>	140W
<b>Reset button</b>	Support reset to default configuration
<b>Dimension</b>	265(W) x 183(D) x 44(H) mm
<b>FAN Design</b>	Fan-less
<b>Temperature</b>	Operating: 0 ~ 40? Storage : -40 ~ 70?
<b>Humidity</b>	Operating: 10% ~ 90% RH (non-condensing) Storage: 5% ~ 90% RH (non-condensing)

#### Software Features

<b>Status</b>	System Information			
	Logging Message			
	Port	Statistics		
		Error Disabled		
		Bandwidth Utilization		
	Link Aggregation			
	MAC Address Table	8K		
<b>Network</b>	IP Address	Static / Dynamic		
	System Time	SNTP / From Computer / Manual Time		
<b>Port</b>	Port Setting	State / Speed / Duplex / Flow Control		
	Error Disabled	Recovery Interval	ACL / ARP Rate Limit / BPDU Guard / Broadcast Flood / DHCP Rate Limit / Port Security / Self Loop / Unicast Flood / Unknown Multicast Flood	
	Link Aggregation	Group		
		Port Setting	State / Speed / Flow Control	



		LACP	
	EEE		
	Jumbo Frame	9K Byte	
<b>PoE</b>	Global Setting	Schedule Status	
	Priority Setting		
	Power Limit		
	Power Show		
<b>VLAN</b>	VLAN	Create VLAN	
		VLAN Configuration	
		Membership	
		Port Setting	
	Voice VLAN	Property	
		Voice OUI	
	Protocol VLAN	Protocol Group	
		Group Binding	
	MAC VLAN	MAC Group	
		Group Binding	
	Surveillance VLAN	Property	
		Surveillance OUI	
	GVRP	Property	
		Membership	
Statistics			
<b>MAC Address Table</b>	Dynamic Address	Aging Time	
	Static Address		
	Filtering Address		
<b>Spanning Tree</b>	Property	State / Operation Mode / Path Cost / BPDU Handling	Operation Mode : STP/RSTP/MSTP
	Port Setting		
	MST Instance		
	MST Port Setting		
	Statistics		
<b>Discovery</b>	LLDP	Property	
		Port Setting	
		MED Network Policy	
		MED Port Setting	

		Packet View	
		Local Information	
		Neighbor	
		Statistics	
<b>Multicast</b>	General	Property	Unknown Multicast Action / Multicast Forward Method
		Group Address	
		Router Port	
		Forward All Table	
		Throttling	
		Filtering Profile	
		Filtering Binding	
		IGMP Snooping	Property
	Querier		
	Statistics		
	MLD Snooping	Property	State / Version / Report Suppression
		Statistics	
	MVR	Property	State / VLAN / Mode / Group Start / Group Count / Query Time
		Port Setting	
Group Address			
<b>Security</b>	RADIUS		
	TACACS+		
	AAA	Method List	
		Login Authentication	Console / Telnet / SSH / HTTP / HTTPS
	Management Access	Management VLAN	
		Management Service	Telnet / SSH / HTTP / HTTPS / SNMP / Session Timeout
		Management ACL	
		Management ACE	
	Authentication Manager	Property	
		Port Setting	



		<b>MAC-Based Local Account</b>	
		<b>WEB-Based Local Account</b>	
		Sessions	
	Port Security		
	Protected Port		
	Storm Control		State / Broadcast / Unknown Multicast / Unknown Unicast / Action (Drop / Shutdown)
	DoS	Property	
		Port Setting	
	Dynamic ARP Inspection	Property	
		Statistics	
	DHCP Snooping	Property	
		Statistics	
		Option82 Property	
		Option82 Circuit ID	
	IP Source Guard	Port Setting	
		IMPV Binding	
		Save Database	
<b>ACL</b>	MAC ACL		
	MAC ACE		
	IPv4 ACL		
	IPv4 ACE		
	IPv6 ACL		
	IPv6 ACE		
	ACL Binding		
<b>QoS</b>	General	Property	CoS / DSCP / CoS-DSCP / IP Precedence
		Queue Scheduling	Strict Priority / WRR
		CoS Mapping	
		DSCP Mapping	
		IP Precedence Mapping	
	Rate Limit	Ingress / Egress Port	





<b>Diagnostics</b>	Logging	Egress Queue	
		Property	Console / RAM / Flash
		Remote Server	
	Mirroring		
	Ping		
	Traceroute		
	Copper Test		
	Fiber Module		
UDLD	Property		Message Time
	Neighbor		
<b>Management</b>	User Account		
	Firmware	Upgrade / Backup	Action (Upgrade / Backup) / Method (TFTP / HTTP)
		Active Image	Active Image / Backup Image
	Configuration	Upgrade / Backup	Action (Upgrade / Backup) / Method (TFTP / HTTP)
		Save Configuration	Source File / Destination File, Restore Factory Default
	SNMP	View	
		Group	
		Community	
		User	
		Engine ID	
		Trap Event	Authentication Failure / Link UP_Down / Cold Start / Warm Start
Notification			
<b>RMON</b>	Statistics		
	History		
	Event		
	Alarm		

## Atributos

Atributo	Valor
Anzahl Ports PoE/LAN:	8/0
Belüftung Switch:	Lüfterlos
Einsatzort Switch:	19"
Management:	smart managed (WebGui)
PoE Budget:	<200 Watt
PoE Port Leistung:	30W at
SFP Geschwindigkeit:	SFP 1GBit
Peso:	2.3 Kg
Garantía:	24.00 Meses

## Accesorios

Número de artículo	Denominación
27947	ALLNET ALL4750 Módulo Mini-GBIC 1000Mbit, SX/LC
59426	ALLNET ALL4751 Módulo Mini-GBIC 1x 1000Mbit, LX/LC
114334	ALLNET Switch Modul ALL4752 SFP(mini Gbic), 1000Mbit, LHX/LC
59391	ALLNET ALL4753 Módulo Mini-GBIC 1x 1000Mbit EX/LC
59393	ALLNET ALL4755 Módulo Mini-GBIC 1x 1000Mbit, ZX/LC
175246	ALLNET 0489V4 Inyector PoE & PoE+ (15,4W/30W)
99315	ALLNET ALL8804PoE+ Switch 8x Gigabit HPoE, 2x PoE+ o 4x PoE
90956	ALLNET ALL8894WMP Switch 8x Gigabit HPoE, 2x PoE+ o 4x PoE
93392	ALLNET ALL8808POE Switch 8x Gigabit HPoE, 4x PoE+ o 8x PoE
193997	ALLNET ALL-SG8610PM Switch gestionable 8x Gigabit 130W / 2x SFP / 8x PoE+
75932	Synergy 21 S215003 - Latiguillo CAT5e FTP RJ-45 gris, 0.25m
194025	ALLNET ALL-SG8626PM Switch gestionable 24x Gigabit 390W / 4x SFP / 24x PoE+
186548	ALLNET ALL0488v6 Inyector PoE Gigabit PoE & PoE+ (15.4W/30W)
175246	ALLNET 0489V4 Inyector PoE & PoE+ (15,4W/30W)
99305	ALLNET ALL951000 Protector contra rayos Cat 6
194025	ALLNET ALL-SG8626PM Switch gestionable 24x Gigabit 390W / 4x SFP / 24x PoE+
93392	ALLNET ALL8808POE Switch 8x Gigabit HPoE, 4x PoE+ o 8x PoE

Número de artículo	Denominación
193997	ALLNET ALL-SG8610PM Switch gestionable 8x Gigabit 130W / 2x SFP / 8x PoE+
27947	ALLNET ALL4750 Módulo Mini-GBIC 1000Mbit, SX/LC
59391	ALLNET ALL4753 Módulo Mini-GBIC 1x 1000Mbit EX/LC
59393	ALLNET ALL4755 Módulo Mini-GBIC 1x 1000Mbit, ZX/LC
114334	ALLNET Switch Modul ALL4752 SFP(mini Gbic), 1000Mbit, LHX/LC
140675	ALLNET Switch Module ALL4765 SFP(Mini-GBIC), 1000Mbit
140955	TP(RJ45) POE-Tester, at/af, Endspan/Midspan, standard, Synergy 21,
141255	Netzkabel 230V Schutzkontakt CEE7(Stecker)->Kaltgeräte IEC-C13(Buchse), 1m,Black IEC Lock
141254	Netzkabel 230V Schutzkontakt CEE7(Stecker)->Kaltgeräte IEC-C13(Buchse), 2m,Black IEC Lock
141256	Netzkabel 230V Schutzkontakt CEE7(Stecker)->Kaltgeräte IEC-C13(Buchse), 3m,Black IEC Lock
188424	CyberPower SAI Interactiva 600VA/360W
188433	CyberPower SAI Interactiva 650VA/360W
188435	CyberPower SAI Interactiva 1000VA/600W
188439	CyberPower SAI Interactivo 1500VA/900W

[Haga clic aquí para descubrir más artículos de esta categoría en nuestra tienda.](#)