




Número de artículo: 200867  
Número de fabricante: MT-15RK3399A10WPoE-NFC



#### EAN CODE

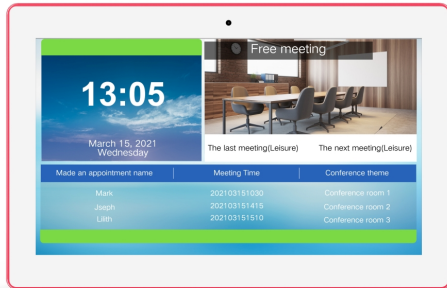

ALLNET Meeting Room LED Tablet 15 inch RK3288 Android 8/10 and RFID (NXP Mifare, Desfire)

Including power supply and integrated snap-in wall mount with anti-theft protection. RGB LED for displaying e.g. warning signals, occupancy of meeting rooms etc.

Through the NFC can also be implemented very well time recording terminals or info terminals with ID, such as multi-party apartment complexes.

Currently tested Android time terminal software:

PDS Zeit	funktioniert, Configfile muss aber manuell eingespielt werden, Kamera wir nicht angesprochen
AIDA-Zeit	funktioniert laut Hersteller mit unseren Artikelnummern 174715/174716/174717/174888 u. 182897

We will gladly provide the API/SDK for NFC/RFID and LED on request.

Specifications NFC: NXP PN7150

PN7150 is a full-featured NFC controller solution with integrated firmware and NCI interface, for contactless communication on 13.56 MHz. It is compatible with the requirements of the NFC Forum.

PN7150 was developed based on lessons learned from previous generations of NXP NFC devices. It is the ideal solution for quickly integrating NFC technology into any application, especially those using O/S environments such as Linux and Android.



- Full NFC forum compliance with small form factor antenna.
- Embedded NFC firmware that provides all NFC protocols as a pre-integrated feature
- Direct connection to main host or microcontroller, through physical I2C bus and NCI protocol
- Ultra-low power consumption in polling loop mode
- High efficiency integrated power management unit (PMU)
  
- Supported RF protocols
  - NFCIP-1, NFCIP-2 protocol (see [8] and [11])
  - ISO/IEC 14443A, ISO/IEC 14443B PICC, NFC Forum T4T modes via host interface (see [3])
  - NFC Forum T3T via host interface
  - ISO/IEC 14443A, ISO/IEC 14443B PCD designed according to NFC Forum digital protocol T4T platform and ISO-DEP
  - FeliCa PCD mode
  - MIFARE PCD encryption mechanism (MIFARE Classic 1K/4K)
  - NFC Forum tag 1 to 5 (MIFARE Ultralight, Jewel, Open FeliCa tag, MIFARE DESFire) (see [1])
  - ISO/IEC 15693/ICODE VCD mode (see [9])



For more information, please refer to the NFC data sheet.

## Atributos

Atributo	Valor
Arbeitsspeicher (RAM):	2
Betriebssystem:	Android 10
Bluetooth:	ja
Chipset:	RK3288
Diagonale:	15,6
Einsatzbereiche:	Indoor
Farbe Displayrand:	weiß
Farbe Gehäuse:	weiß;
Hauptspeicher:	16
Kamera:	ja
Mobilfunk:	nein
Montageart:	integrierte Halterung;
NFC:	13,56MHz
Produktart:	Tablet
Stromversorgung:	PoE&Netzteil

Atributo	Valor
Peso:	3.4 Kg
Garantía:	24 Meses

## Imágenes adicionales

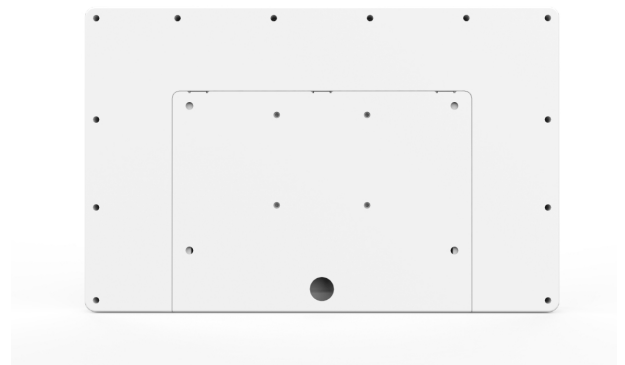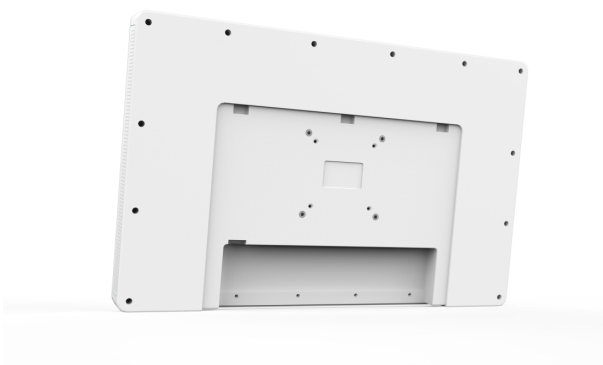



Número de artículo: 200867  
Número de fabricante: MT-15RK3399A10WPoE-NFC





Número de artículo: 200867  
Número de fabricante: MT-15RK3399A10WPoE-NFC

## Accesorios

Número de artículo	Denominación
149144	VESA Soporte adaptador para Mini-PC a Monitor
161472	VESA Desktop Standfuß Halterung Flex für Tablet, Display, Mo
174452	VESA desktop stand mount Flex for tablet
104257	Flepo Soporte de pared omicron-1 VESA
104258	Flepo Soporte de pared omicron-2 VESA
146334	VESA wall mount for tablet, monitors very flat with securing
107727	HEP Alimentación LED - 12V/12W circular
168029	ALLNET Wireless Client 2,4/5GHz
198301	VESA Soporte ajustable en altura, negro
198302	VESA Soporte ajustable en altura, blanco