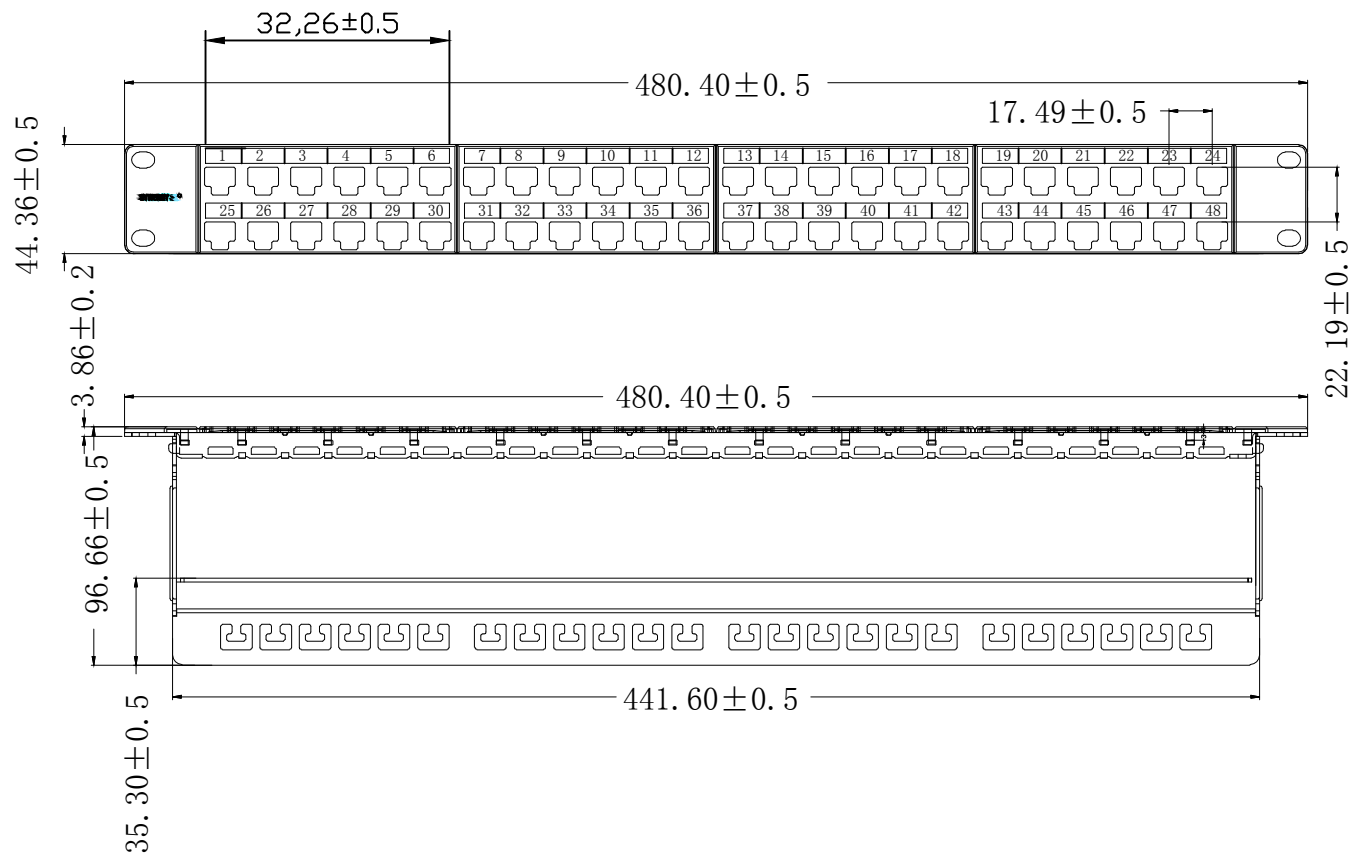
**SYNERGY 21<sup>®</sup>**

Gray RAL 7035


"SYNERGY 2<sup>®</sup>" for black printing The pantone of Color is black c  
"1" for blue printing The pantone of Color is 298C

## NOTE:


1. PANEL FRAME:SPCC CARBON STEEL T=1.2MM POWDER COATING
2. PANEL BRACKET SPCC NICKEL PLATING
3. BODY COLOR: Gray "1 2 3..... 48" Color: black Font : Arial H:4.4MM
4. Accessory:
  1. Cable Tie(75X1.9mm) \*48pcs
  2. Screw and Nut M6\*18mm × 4set
5. RoHS 2.0 & REACH Compliant
6. Packing:1pcs/PE bag+lablel

| ITEM NO. | Colour        |
|----------|---------------|
| S216339  | Gray RAL 7035 |



|                                                                                                                                   |     |                               |  |  |              |      |                                                       |  |                     |  |               |  |            |    |
|-----------------------------------------------------------------------------------------------------------------------------------|-----|-------------------------------|--|--|--------------|------|-------------------------------------------------------|--|---------------------|--|---------------|--|------------|----|
| 1.Basic Pic (Port: 5mm) 4 ports<br>2.Screw and Nut M6*18mm × 4set<br>5.RoHS 2.0 & REACH Compliant<br>6.Packing:1pcs/PE bag+lablel |     |                               |  |  | SYNERGY 21   |      |                                                       |  |                     |  |               |  |            |    |
|                                                                                                                                   |     |                               |  |  | CUSTOMER     |      |                                                       |  | ITEM NO.            |  | See The Chart |  |            |    |
|                                                                                                                                   |     |                               |  |  | PRODUCT NAME |      | 19" 1U 48 ports blank Patch panel<br>Three-piece type |  | manufacture country |  | CHINA         |  | UNIT       | MM |
|                                                                                                                                   |     |                               |  |  |              |      |                                                       |  |                     |  |               |  |            |    |
|                                                                                                                                   |     | NEW                           |  |  | 2018-10-17   | A    | DRAWNBY                                               |  | CHECKBY             |  | APPOBY        |  | DATE       |    |
| BY                                                                                                                                | CHK | REVISION RECORD MODIFICATIONS |  |  | DATE         | REV. | SYNERGY 21                                            |  | SYNERGY 21          |  | SYNERGY 21    |  | 2018-10-17 |    |



16.5±0.2

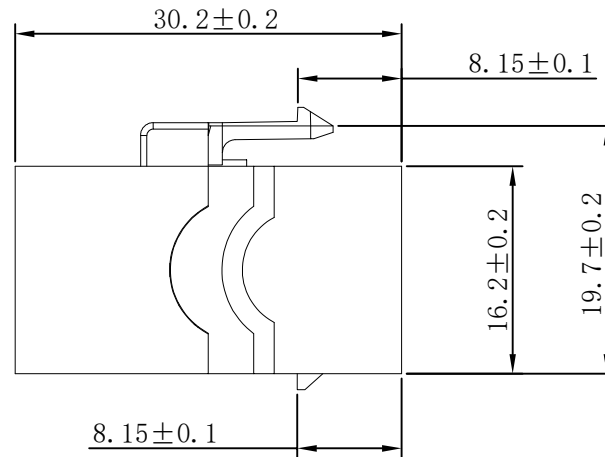

Connection Method

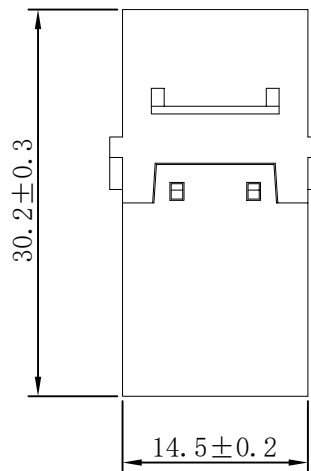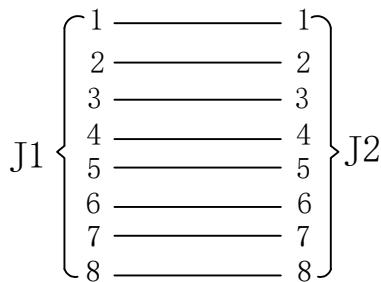

MATERIAL LIST:

|    |           |                  |      |        |
|----|-----------|------------------|------|--------|
| ④  | Shrapnel  | PC White         | 1    |        |
| ③  | Contact   | 8P8C Gold Plated | 16   |        |
| ②  | Housing   | Zinc Alloy       | 1    |        |
| ①  | PCB       | FR-4, t=0.8      | 1    |        |
| NO | MAT. NAME | DESCRIPTION      | QT'Y | REMARK |

|    |     |  |  |  |  |  |  |  |  |
|----|-----|--|--|--|--|--|--|--|--|
|    |     |  |  |  |  |  |  |  |  |
|    |     |  |  |  |  |  |  |  |  |
|    |     |  |  |  |  |  |  |  |  |
| BY | CHK |  |  |  |  |  |  |  |  |

NOTES:

- ELECTRICAL:
- Contact Resistance : 20MΩ MAX
  - Insulation Resistance : 500MΩ MIN @ 500V DC
  - Withstand Voltage : DC 1000V AC 700V RMS 60Hz, 1MIN
  - Component testing for Cat.6A to ISO/IEC 11801 Ed.2.2:2011-06  
DIN EN 50173-1:2011-09  
TIA/EIA-568.2-D (2009-08)

ENVIRONMENTAL:

- Storage : -40℃ T0+70℃
- Operation : -10℃ to+60℃

MECHANICAL

- RJ45 Contact Life: 750 Times Min
  - Plug inforce:<30N
- RoHS 2.0 and REACH Compliant
- PACKING:1PCS/PE bag+lable1,10PCS/PE Bag+Lable 2, 50PCS/small box, xxPCS/CTN+LABLE 3

|              |                                                                   |            |                      |           |          |    |  |
|--------------|-------------------------------------------------------------------|------------|----------------------|-----------|----------|----|--|
| SYNERGY 21   |                                                                   |            |                      |           |          |    |  |
| CUSTOMER     | AN                                                                |            | ITEM NO.             | S216317V4 |          |    |  |
| PRODUCT NAME | CAT.6A STP RJ45 F/F Coupler Keystone jack Type Zinc Alloy Housing |            | manufacture country: | CHINA     | UNIT     | MM |  |
| DRAWNBY      |                                                                   | CHECKBY    | APPOBY               |           | DATE     |    |  |
| SYNERGY 21   |                                                                   | SYNERGY 21 | SYNERGY 21           |           | 2025-4-2 |    |  |