


ALLNET Switch industrial full managed Layer2+ 6 Port GbE • PoE Budget 120W • 4x PoE+ • 2x SFP • Fanless • DIN • JSON • ALL-SGI8106PMJ



EAN CODE



ALLNET Switch industrial full managed Layer2+ 6 Port GbE • PoE Budget 120W • 4x PoE+ • 2x SFP • Fanless • DIN • JSON • ALL-SGI8106PMJ

Highlights:


- 4 Gigabit ports with PoE AF-AT support up to 30 watts per port
- 2x SFP ports for fibre optic GBIC e.g. ALL4750/4751-INDU etc.
- PoE ports 1-4 max. PoE IEEE802.3at 30W
- Layer2+ features such as 802.1Q VLAN, port isolation IGMP, LLDP, PoE+ management, IP source guard, ACLs etc.
- Supports spanning tree STP (802.1D) and RSTP (802.1W) and MSTP (802.1s)
- Supports PoE management such as PoE scheduling, PoE PD-alive, port PoE priority, soft reboot PoE non-stop
- Supports G.8032 quick ring protocol. Self-healing <20ms
- Max. PoE budget = 120 watts
- Freeless metal housing with optimised heat dissipation
- Easy to use as a table-top device, wall-mounted or top-hat rail
- Extended temperature range from -40°C ~ +75°C
- **NEW: LAN JSON-Java-Script-Notation API for ON/OFF via remote**

ALLNET ALL-SGI8106PMJ L2+ managed switch with 4 ports PoE is an industrial switch with 4-port Gigabit 802.3af/at PoE + 2-port Gigabit SFP optical port. It has a robust IP40 housing and a redundant power supply system. The industrial managed switch offers user-friendly but advanced IPv6/IPv4 management interfaces and a

soft reboot PoE non-stop function and is the best investment for expanding industrial companies or upgrading their network infrastructure.



Intelligent PD alive check for frozen PDs

The ALL-SGI8106PMJ industrial PoE switch with 8 ports can be configured to monitor the status of the connected PDs in real time. As soon as the PD stops working and responding, the ALL-SGI8106PMJ restarts the power supply to the PoE port and gets the PD up and running again. In addition, reliability is significantly improved by the fact that the PoE port resets the PD power supply, reducing the administrative burden on the administrator.

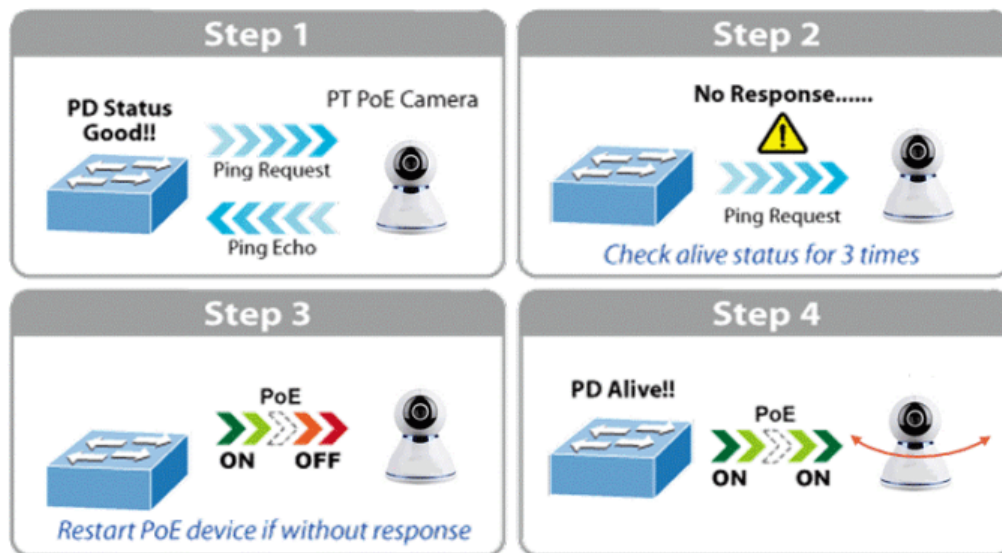

PoE schedule function for energy saving

To protect the environment, the ALL-SGI8106PMJ Ethernet PoE switch can effectively control the power supply in addition to its ability to deliver high wattage. The PoE schedule function helps to enable or disable the PoE power supply for each PoE port during specific time intervals and is a powerful feature that helps SMEs or enterprises to save power and money.

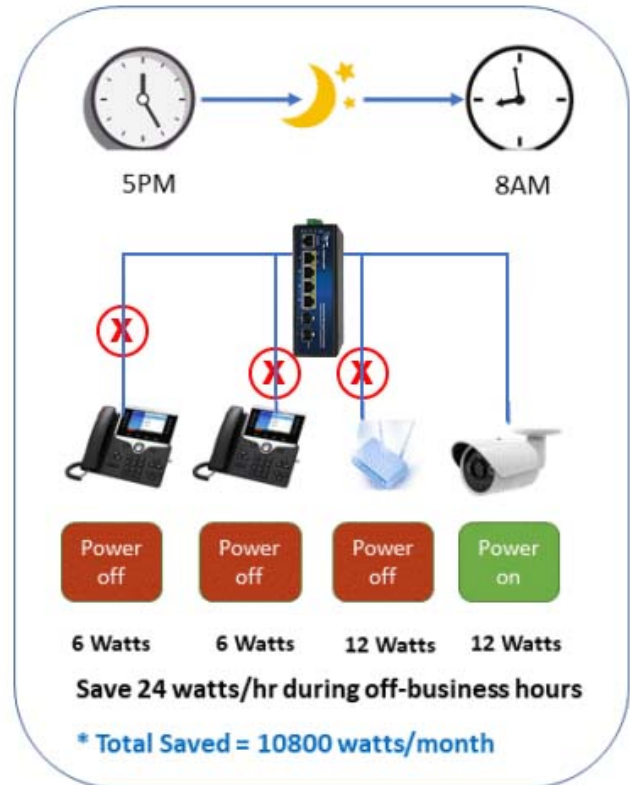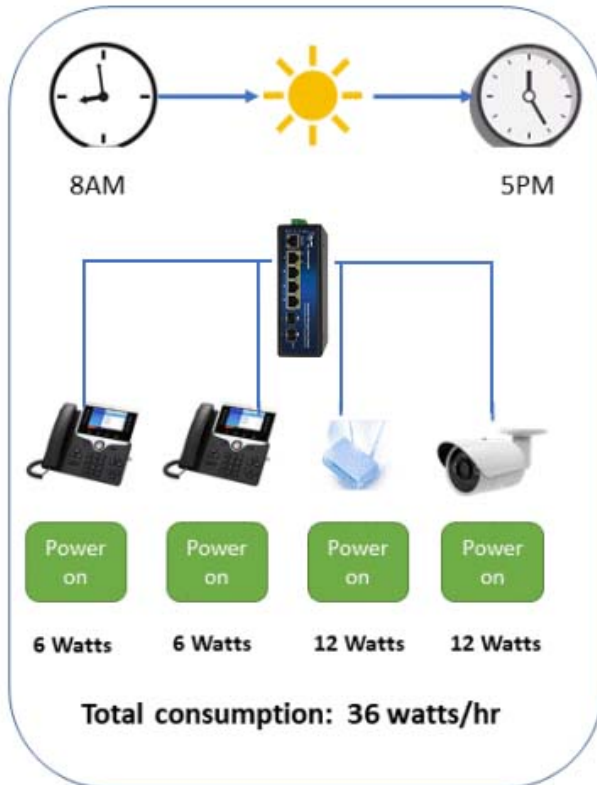

1000 BASE-T UTP With PoE

Planned PD restart


The intelligent PoE switch ALL-SGI8106PMJ allows each of the connected PoE IP cameras or PoE wireless access points to be restarted at a specific time every week. This reduces the risk of the IP camera or AP crashing due to a buffer overflow.



Redundant ring with fast recovery for critical network applications


The ALL-SGI8106PMJ supports redundant ring technology and has a strong, fast self-recovery capability to prevent interruptions and external intrusions. It integrates advanced ITU-T G.8032 ERPS technology, Spanning Tree Protocol (802.1s MSTP) and a redundant power supply system into the customer's industrial automation network to improve system reliability and uptime in harsh factory environments. In a given simple ring network, the data link recovery time can be as low as 20 ms.

ERPS Ring for Video Transmission Redundancy

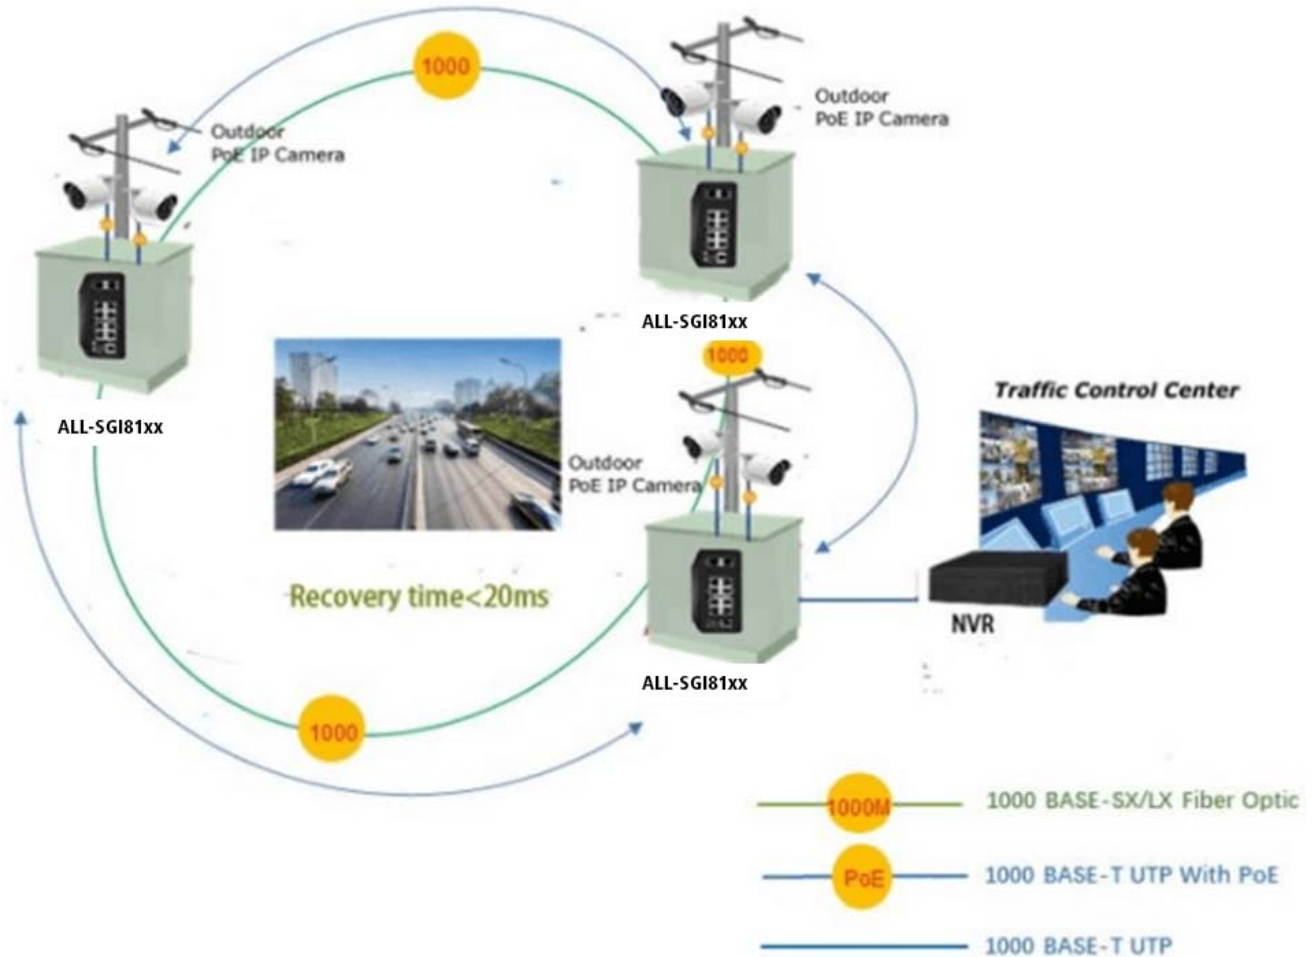

1588 time protocol for industrial computer networks

The ALL-SGI8106PMJ is ideal for telecommunications and carrier Ethernet applications and supports MEF service provisioning and timing-over-packet solutions for IEEE 1588 and synchronous Ethernet.

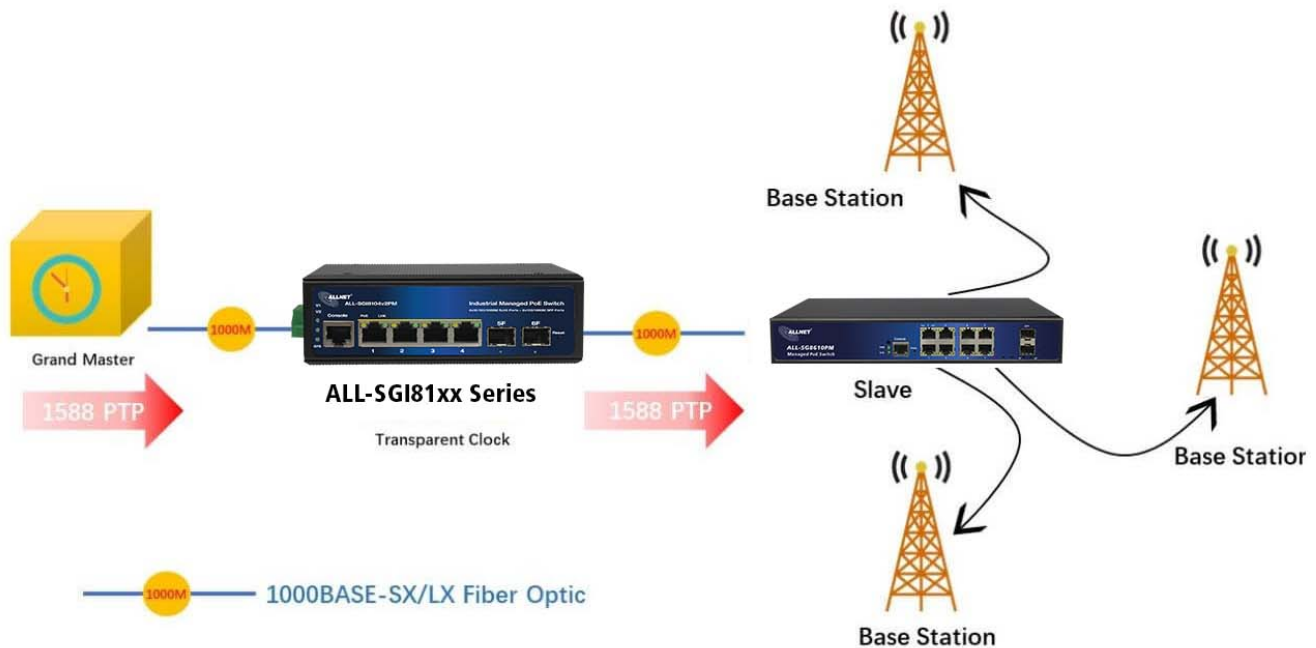

Strong Layer 2 functions

The ALL-SGI8106PMJ Layer 2 Ethernet switch can be programmed for advanced Layer 2 switch management functions such as dynamic port link aggregation, 802.1Q tagged VLAN, Q-in-Q VLAN, private VLAN, Multiple Spanning Tree Protocol (MSTP), QoS, bandwidth control, IGMP snooping and MLD snooping. By aggregating the supporting ports, the ALL-SGI8106PMJ enables the operation of a high-speed trunk group that has multiple ports and also supports fail-over.

Efficient and versatile management methods

For efficient management, the ALL-SGI8106PMJ is equipped with console, web and SNMP management interfaces.

With the integrated web-based management interface, it offers a user-friendly, platform-independent management and configuration option.

For text-based management, access is possible via Telnet and the console port.

For standards-based monitoring and management software, it provides an SNMPv3 connection that encrypts the packet contents for secure remote management during each session.

Intelligent PoE switch with SFP DDM function

The ALL-SGI8106PMJ supports the SFP DDM (Digital Diagnostic Monitor) function, which allows the network administrator to easily monitor real-time parameters of the SFP transceivers, such as optical output power, optical input power, temperature, laser bias voltage and transceiver supply voltage.

The technical features and stable housing make the switch the ideal solution for industrial applications. Supplied



without power supply unit - please order separately!

JSON-Java Script Object Notation API

With the JSON API, the ADMIN can create a special user and grant this user authorisation for JSON. We have focussed on 2 functions that we consider important.

- PoE ON/OFF & LAN Port Enabled/Disabled (for switches with PoE function)
- LAN Port Enabled/Disabled (for switches without PoE)



Part No.: 223959
Vendor Part No.: ALL-SGI8106PMJ

ALLNET
(json o

It will

Valid f
Hew ac

In this
This m

Descrip
in URL
(Basic A

Call "h

Param

```
„id={i  
„set={  
„callb
```



Technical details:

Model	ALL-SGI8106PMJ
Copper Ports	4-10/100/1000BASE-T RJ45 auto-sensing ports
Fibre ports	2-100/1000BASE-T SFP interfaces, supports 100/1000Mbps dual mode
PoE ports	4-802.3af/802.3at PoE injector ports
Console ports	1 x RS-232-to-RJ45 serial port (115200, 8, N, 1)
Switch architecture	Store-and-Forward
Switch Fabric	12Gbps/non-blocking
Throughput	8.928Mpps @64 bytes
Address Table	8K entries
Share Data Buffer	4.1 Mb
Jumbo Frame	9216 bytes
SDRAM	1Gb
Flash memory	128Mb
Flow Control	IEEE 802.3x pause frame for full-duplex ; Back pressure for half-duplex
Reset button	>2 sec: Factory default and reset
Power Supply	48 ~ 57 VDC, 50/60Hz, Dual DC
PoE standards	IEEE 802.3af Power over Ethernet/PSE IEEE 802.3at Power over Ethernet Plus/PSE
PoE Power Supply Type	Per port 52V DC, 300mA. Max. 15.4 watts (IEEE 802.3af) Per port 52V DC, 600mA. Max. 30 watts (IEEE 802.3at)
LED indicators	Power: Green Solid on—power work normal, off—power disconnected System: Green Blink—work normally, solid on—soft work abnormal, fast blink—soft upgrade PoE: Yellow Solid on—PoE work normally, Off—PoE doesn't work, Blink—PoE overload 10/100/1000T RJ45 interfaces (Port 1 to Port 4): 1000



	LNK/ACT (Green), Blink–port connected with data transmission; Solid on–port connected without data transmission 100/1000Mbps SFP Interfaces (Port 5 to Port 6): Green Blink- port connected with data transmission; Solid on- port connected without data transmission
EMC	6KV surge protection (6KV Common Mode, 2KV differential Mode), 6KV contact/8KV air ESD Surge Immunity:6KV Per: IEC61000-4-5 ESD Protection: ESD Level 4 Per: IEC61000-4-2;EFT Level 4 Per: IEC61000-4-4
Dimension	145x112x47.2mm
Weight	0.6kg
Working Temperature	-40°C to 75°C
Storage Temperature	-40°C to 80°C
Operation Humidity	5% to 95%, non-condensing
MTBF	50,000hrs

Layer 2 functions

Port configuration	Auto-negotiation Flow control Port Mirror: TX/RX/BOTH; Many-to-1 monitor CPU Mirror Traffic statistics
Link aggregation	Static link aggregation LACP(Dynamic Trunk/Static Trunk) Algorithm based on Source/Destination MAC Algorithm based on Source/Destination IP
MAC Table	Aging Time

	Static MAC address
	Dynamic MAC address management
VLAN	4094 Active VLANs 4094 VID 802.1Q Tag VLAN Port VLAN Protocol VLAN MAC VLAN Voice VLAN 802.1ad Q-in-Q tunnelling Private VLAN (Protected port) GARP/GVRP
ACL	256ACLs L2, L3 e L4 Time-based ACL IP ACL MAC ACL MAC-IP ACL User-Defined ACL ICMPv6
Spanning tree	802.1D Spanning Tree Protocol (STP) 802.1w Rapid Spanning Tree Protocol (RSTP) 802.1s Multiple Spanning Tree Protocol (MSTP) Loop Guard Root Guard TC-BPDU Guard



	BPDU Guard BPDU Filter
Ring Protection	<20ms G.8032 ERPS Ring Fast Ring ALLNET ring, < 20ms
Multicast	256 groups IGMP v1/v2/v3 Snooping, Fast Leave MLD Snooping Multicast VLAN IGMP filter MVR Multicast routing
QOS	8 mapping IDs to 8 level priority queues CoS port-based CoS 802.1p-based CoS DSCP-based Scheduling algorithms SP, WRR, SP+WRR Storm Control (Broadcast, Multicast, Unknown Unicast) Bandwidth control per port SWRR, DWRR for Scheduling Flow Redirect Precedence TOS Rate Limiting(Ingress/Egress) Stri Priority
Security Features	Port Security



	MAC address filter ARP Association (Manual, ARP scanning, DHCP snooping) ARP Protection AAA DAI DoS (Denial of Service) Classification of packages based on: End.MAC, IP End, TCP / UDP Ports, Protocol Type; 802.1x Authentication (port-based e MAC-based) TACACS/TACACS+ Authentication RADIUS Authentication DHCP Filter Guest VLAN SSLv2/SSLv3/TLSv1 SSHv1/SSHv2 Restriction of WEB access based on: IP Address, And. MAC and Port; Port Isolation Loopback detection
Management	SNMP v1/v2c/v3 with Full Private MIBs RMON 4 groups WEB (HTTP/HTTPS) CLI (Telnet, Console, SSHv1/v2) Firmware upgrade via console/web/TFTP Configuration backup/reload



	Dual firmware LLDP Configuration export/import CDP Aware OAM (IEEE802.3ah) CFM (IEEE802.1ag) sFlow Telnet client
Synchronisation, IEEE1588	Support IEEE1588v2 transparent clock
Other Features	DNS Client DHCP Relay DHCP Client DHCP Snooping DHCP Option 66 DHCP option 67 DHCP option 82 NTP/SNTP client UPNP UDLD
PoE management	Total PoE power budget control Per port PoE function enable/disable PoE admin-mode control PoE port power feeding priority Per PoE port power limitation PD classification detection

	PD alive check PoE schedule Soft-reboot PoE non-stop
Maintenance	Cable Diagnostics Ping SFP DDM (Digital Diagnostics Monitoring) Thermal protection System log (Local and Remote) Memory and CPU Monitoring Tracert/ Tracert 6

Layer 3 functions

Static Routing	IPv4 Unicast: Static Routing (Software Base) IPv6 Unicast: Static Routing (Software Base)
IPV6	IPv6 neighbour discovery (ND) Path maximum transmission unit (MTU) discovery Internet Control Message Protocol (ICMP) version 6 TCPv6/UDPv6 Ping6 Telnet(v6) Http/Https Interface IPV6 ACL IPV6

Attributes

Attribute	Value
-----------	-------


Anzahl Ports PoE/LAN:	4/0
Belüftung Switch:	Lüfterlos
Einsatzort Switch:	Industrial DIN
Extra Features:	JSON-PoE-API;
LAN Geschwindigkeit:	1Gbit/s
Management:	full managed
PoE Budget:	<200 Watt
PoE Port Leistung:	30W at
SFP Geschwindigkeit:	SFP 1GBit
Weight:	0.8 Kg
Warranty:	24.00 Months

Additional Images





Part No.: 223959
Vendor Part No.: ALL-SGI8106PMJ

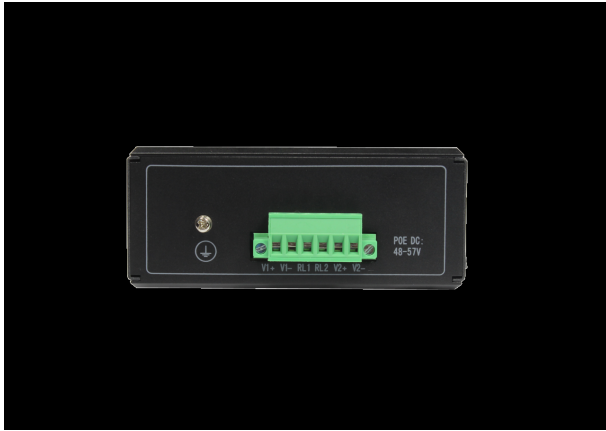

Accessories

Part No.	Name
219493	ALLNET DIN-RAIL wall mount enclosure, T220mm, light gray, IP66, SP, 16x M25 ALL-DIN-101-AC
219572	ALLNET DIN-RAIL Wallmount/PoE Smart-Managed Switch T220mm, Light Gray, IP66, SP, ALL-DIN-SGI8012PM
144991	ALLNET ALL-PR2012P-E / PoE Outdoor IP67 Repeater AT - AT
189128	ALLNET PoE 2x Extender Repeater Outdoor Switch IP67
128033	ALLNET Switch Modul ALL4750-INDU SFP(Mini-GBIC), 1000Mbit MM
128034	ALLNET Switch Module ALL4751-INDU SFP(Mini-GBIC), 1000Mbit,
166757	ALLNET Switch Modul ALL4752-INDU SFP(Mini-GBIC), 1000Mbit, LX/LC, 20Km, Singlemode, Industrial, -40/+85 Grad,
193149	ALLNET Switch Modul ALL4761-INDU SFP(Mini-GBIC), 1000Mbit, WDM(Bidi)/LC, Tx1310nm/Rx1490nm, 9u, 20Km, Singlemode, Industrial -40/+85 Grad,
193150	ALLNET Switch Modul ALL4762-INDU SFP(Mini-GBIC), 1000Mbit, WDM(Bidi)/LC, Tx1490nm/Rx1310nm, 9u, 20Km, Singlemode, Industrial -40/+85 Grad,
208404	ALLNET Switch Modul ALL4765-INDU SFP(Mini-GBIC), 1000Mbit, RJ45(TP), Industrial -40/+85 Grad,
99305	ALLNET / ALL95100 TP Cat 6 / PoE Surge arrester
198028	ALLNET TP Cat 6 Überspannungs-/Blitzschutz Surge Protector ALL95102O Outdoor IP66
140522	Mean Well power supply - 48V 120W DIN rail, narrow
131244	Mean Well power supply - 48V 240W DIN rail
146994	Mean Well Power Supply - 48V 480W DIN Rail
146996	Mean Well Power Supply - 48V 960W DIN Rail
140955	TP(RJ45) POE-Tester, at/af, Endspan/Midspan, standard, Synergy 21,
252985	ALLNET DIN-RAIL Wandgehäuse, T223mm, Schwarz, IP55, SO-DIN-Serie,
219373	ALLNET DIN-RAIL Wandgehäuse, T223mm, Lichtgrau, IP55, SO-DIN-Serie,