


ALLNET DIN-RAIL wall mount enclosure, T220mm, light gray, IP66, SP, 16x M25 ALL-DIN-101-AC

>>> [Vers l'article de la boutique en ligne](#)



EAN CODE



Highlights:


- 3PIN AC100~240V Power INPUT
- 2P circuit breaker 10A included
- 2P SPD surge protection device / surge arrester
- 1x 4 port LC single mode fiber tray
- 16x M25 cable connector outputs/inputs
- IP66 waterproof enclosure and suitable for long term outdoor use.
- DIN rail for mounting of additional end devices like switches or power supplies (see accessories)
- Incl. metal band for pole mounting


The ALL-DIN-101-AC defines itself as a first-class solution for outdoor use of IT end devices, equipped with a DIN rail. This enclosure combines a number of outstanding features that make it a groundbreaking choice.

Inside the enclosure, there are not only double rated 2P circuit breakers with 2 protective poles, but also a 2P SPD surge suppressor and a convenient AC grounding outlet. In addition, it has a 4 port LC fiber optic single mode fiber tray and other innovative elements.

The enclosure's applications are diverse, ranging from sophisticated video surveillance solutions to reliable forest monitoring and establishing stable WIFI/radio connections.

With an impressive waterproof rating (IP66) and rust protection, the housing stands for long-lasting outdoor use. It can be mounted on walls as well as securely mounted on poles using the included metal pole strap. This housing sets new standards in terms of protection, versatility and robustness in the outdoor environment.

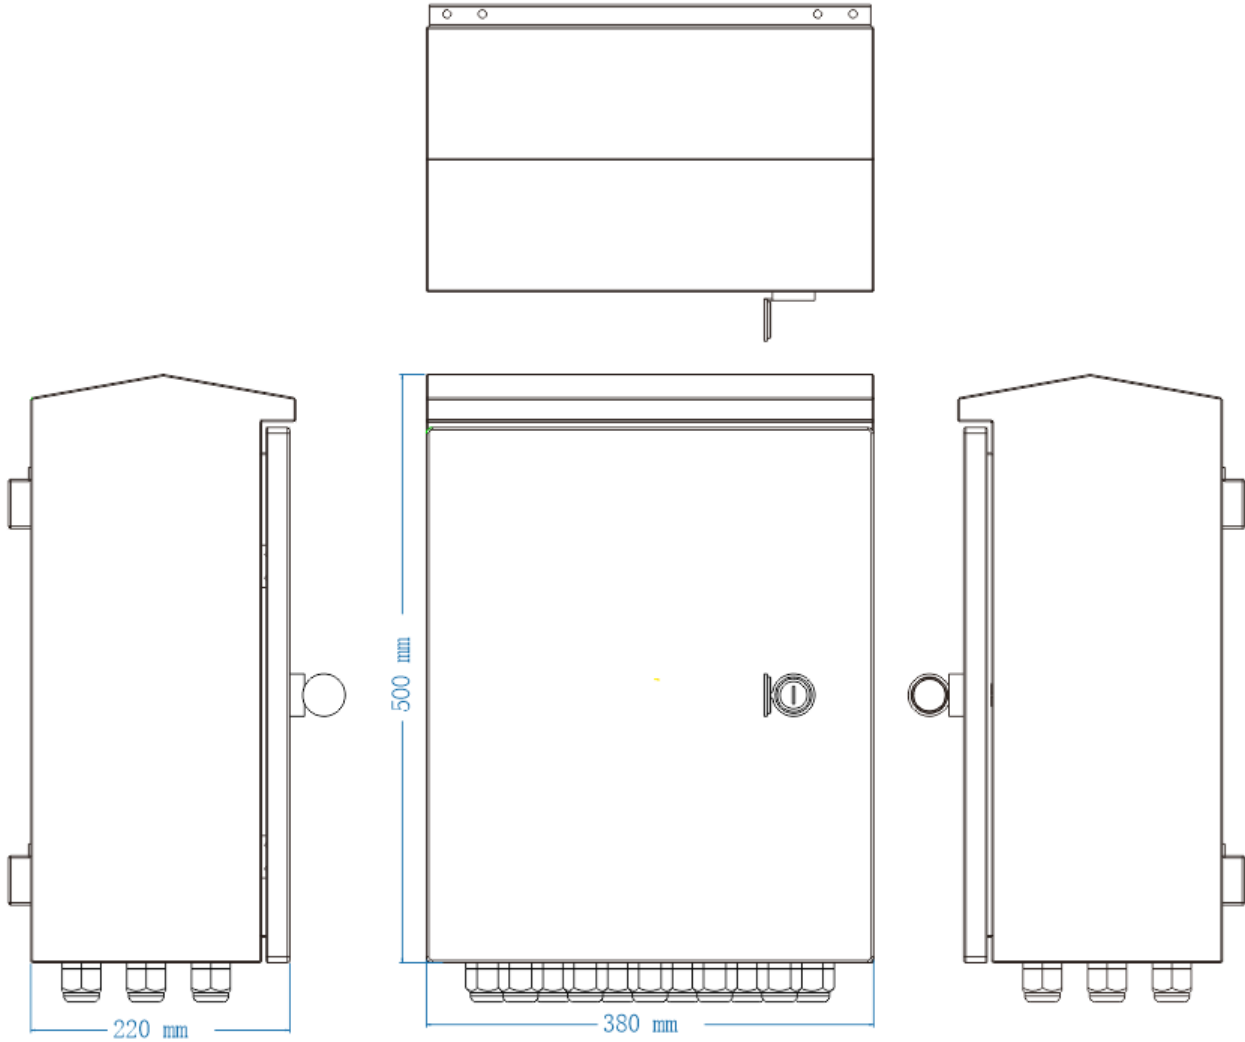

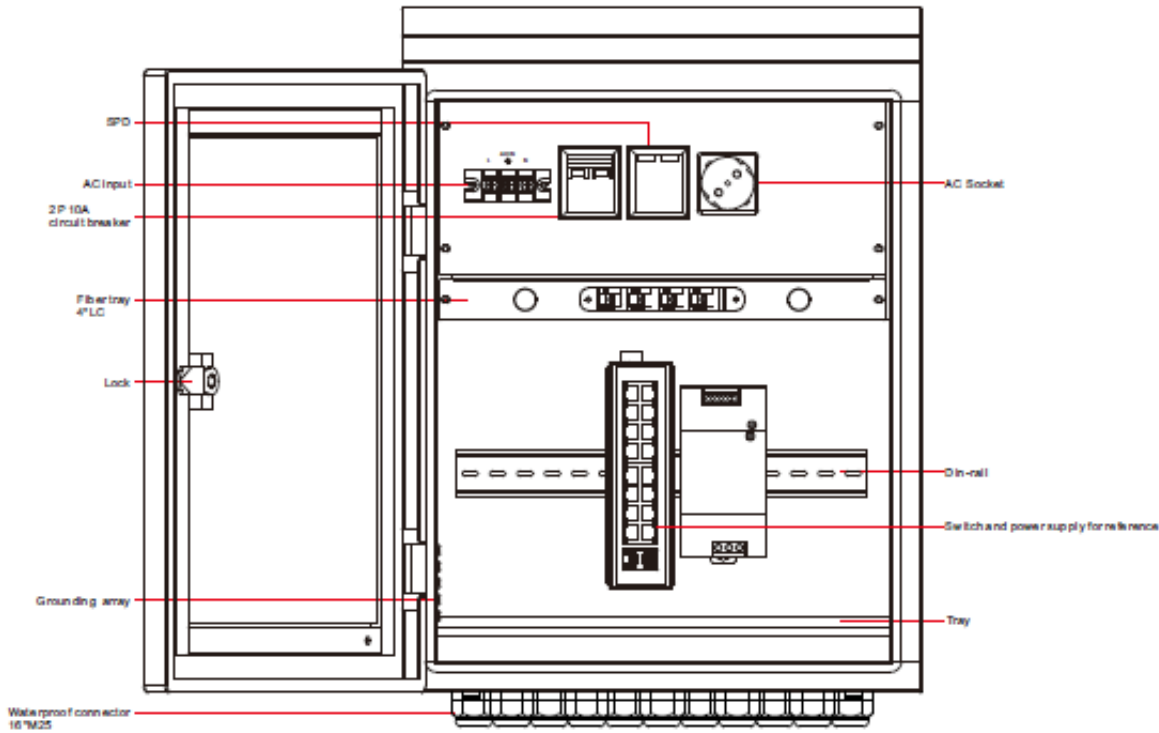

Technical Details:

Parameter	Specifications
Power input	AC100~240V, 50/60Hz, 10A
AC output	AC output 1 channel
Fiber tray	4*LC
Circuit breaker	2P 10A
Connector	16*M25,waterproof
Operating Temperature	- 40°C ~ 75°C
Storage Temperature	-40°C ~ 85°C
Humidity (no condensation)	0~95%
Dimension(HxWxD)	500x380x220mm
Material	Metal
Colour	White
Net-weight	15kg
Mounting Option	Wallmount and Polemount

Attributs

Attribut	Valeur
19/10" Außenhöhe:	500
19/10" Breite:	380
19/10" Farben:	Lichtgrau
19/10" Schrankart:	Wandgehäuse
19/10" Schutzklasse IP:	IP66
19/10" Tiefe:	220
19/10" Türart:	Vollblech Tür
19/10" Wandgehäuse 1- oder 2-teilig:	Wandgehäuse 1-teilig
19/10"/DIN-Rail:	DIN-Rail
Poids:	15 Kg
Garantie:	24.00 Mois

Accessoires

No. d'article	Désignation
228283	ALLNET DIN-RAIL Wandgehäuse zbh. Ersatzschlüssel Set 2pcs
189896	ALLNET Switch industrial smart managed Layer2+ 16 Port GbE • PoE Budget 360W • 12x PoE+ • 4x SFP • Fanless • DIN • ALL-SGI8016PM
223958	ALLNET Switch industrial full managed Layer2+ 12 Port GbE • PoE Budget 240W • 8x PoE at • 4x SFP • Fanless • DIN • JSON API • ALL-SGI8112PMJ
223959	ALLNET Switch industrial full managed Layer2+ 6 Port GbE • PoE Budget 120W • 4x PoE+ • 2x SFP • Fanless • DIN • JSON • ALL-SGI8106PMJ
207417	ALLNET Switch industrial full managed Layer2+ 20 Port GbE • PoE Budget 240W • 8x PoE at • 8x GbE • 4x SFP • DIN • Fanless • ALL-SGI8120PM
131244	Mean Well Alimentation électrique du puits moyen - 48V 240W
140522	Mean Well power supply - 48V 120W DIN rail, narrow
146994	Mean Well Power Supply - 48V 480W DIN Rail
219504	Patchkabel RJ45, CAT6A 500Mhz, 3m, schwarz, S-STP(S/FTP), PUR Indoor/Outdoor/Indu (UV/Water/oil/-resistant), AWG26, mit CAT7 Rohkabel, Synergy 21
219506	Patchkabel RJ45, CAT6A 500Mhz, 7,5m, schwarz, S-STP(S/FTP), PUR Indoor/Outdoor/Indu (UV/Water/oil/-resistant), AWG26, mit CAT7 Rohkabel, Synergy 21



No. d'article: 219493
Numéro de fabricant: ALL-DIN-101-AC

No. d'article	Désignation
205960	Patchkabel RJ45, CAT6A 500Mhz, 7,5m, weiss, S-STP(S/FTP), PUR(Superflex), Außen/Outdoor/Industrie, AWG26, Synergy 21
205964	Patchkabel RJ45, CAT6A 500Mhz, 25m, weiss, S-STP(S/FTP), PUR(Superflex), Außen/Outdoor/Industrie, AWG26, Synergy 21
205965	Patchkabel RJ45, CAT6A 500Mhz, 30m, weiss, S-STP(S/FTP), PUR(Superflex), Außen/Outdoor/Industrie, AWG26, Synergy 21
205966	Patchkabel RJ45, CAT6A 500Mhz, 40m, weiss, S-STP(S/FTP), PUR(Superflex), Außen/Outdoor/Industrie, AWG26, Synergy 21
205967	Patchkabel RJ45, CAT6A 500Mhz, 50m, weiss, S-STP(S/FTP), PUR(Superflex), Außen/Outdoor/Industrie, AWG26, Synergy 21
134571	ALLNET ALL3419 / IP Building-Autom. 3x I2C, 1x USB, LAN/WLAN
104126	ALLNET ALL3505 / IP Homeautomation Appliance HUT
157798	ALLNET ALL3020 / Sensor for humidity and temperature
232560	Poynting · Antennen · 5G/LTE · KFZ · A-PUCK-0002-V2-01 · schwarz · SMA (M) · 6dbi 2x MIMO LTE-Antenna 2x2, 2m SMA-M Kabel "Schwarz" PUCK-2
232566	Poynting · Antennen · 5G/LTE · KFZ · A-PUCK-0005-V2-01 · schwarz · SMA (M) & RPSMA Adapter · KFZ/GPS/WIFI 6dbi Antenna 2x LTE/2x DB WIFI 1x GPS 2m SMA
232567	Poynting · Antennen · 5G/LTE · KFZ · A-PUCK-0005-V2-01-W · weiß · SMA (M) & RPSMA Adapter · KFZ/GPS/WIFI 6dbi Antenna 2x LTE/2x DB WIFI 1x GPS 2m SMA-
232568	Poynting · Antennen · KFZ · A-PUCK-0007-V2-01 · schwarz · SMA (M) & RPSMA Adapter
232569	Poynting · Antennen · 5G/LTE · KFZ · A-PUCK-0008-V2-01 · schwarz · SMA (M) & RPSAM Adapter · KFZ/WIFI 6dbi Antenna 2x LTE/1x DB WIFI 2m SMA-M Kabel "S
182958	ALLNET ALL-RUT22GW Compact Industrial 4G LTE Cellular Router
231733	ALLNET 19"zbh. Kabelbinder, mit Markierfläche, L100xB2,5mm, 100er Pack, Transparent, Synergy 21,