


NOTE:

1. The primary coating and secondary coating have the same color
2. Loose buffered, easy strip type at least 1m
3. ROHS 2.0 and REACH compliant

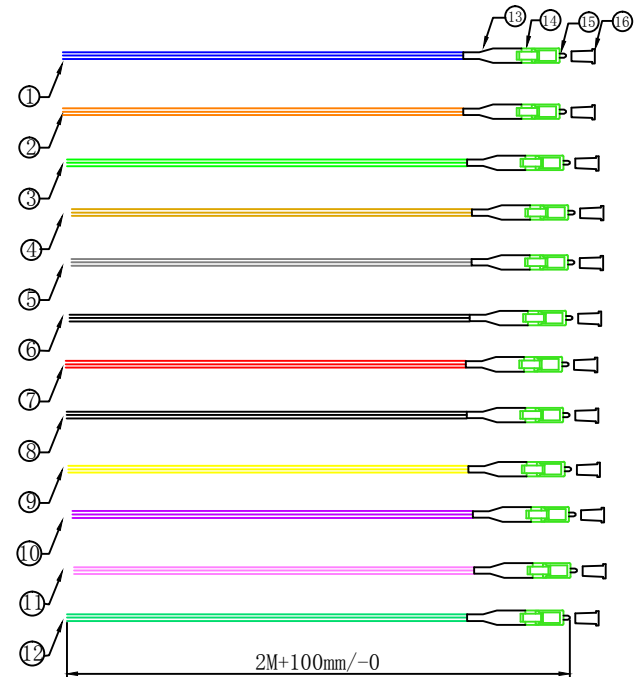

MATERIAL LIST:

⑫	LC White Dust Cap	12	
⑮	LC/UPC MM Ferrule	12	
⑭	LC MM Lime Green 0.9 Connector	12	
⑬	LC 0.9 white Boot	12	
⑫	Fiber Cable LOOSE TUBE MM OM5 50/125 0.9mm Turquoise LSZH	2.0 M	
⑪	Fiber Cable LOOSE TUBE MM OM5 50/125 0.9mm Pink LSZH	2.0 M	
⑩	Fiber Cable LOOSE TUBE MM OM5 50/125 0.9mm Violet LSZH	2.0 M	
⑨	Fiber Cable LOOSE TUBE MM OM5 50/125 0.9mm Yellow LSZH	2.0 M	
⑧	Fiber Cable LOOSE TUBE MM OM5 50/125 0.9mm Black LSZH	2.0 M	
⑦	Fiber Cable LOOSE TUBE MM OM5 50/125 0.9mm Red LSZH	2.0 M	
⑥	Fiber Cable LOOSE TUBE MM OM5 50/125 0.9mm White LSZH	2.0 M	
⑤	Fiber Cable LOOSE TUBE MM OM5 50/125 0.9mm Grey LSZH	2.0 M	
④	Fiber Cable LOOSE TUBE MM OM5 50/125 0.9mm Brown LSZH	2.0 M	
③	Fiber Cable LOOSE TUBE MM OM5 50/125 0.9mm Green LSZH	2.0 M	
②	Fiber Cable LOOSE TUBE MM OM5 50/125 0.9mm Orange LSZH	2.0 M	
①	Fiber Cable LOOSE TUBE MM OM5 50/125 0.9mm Blue LSZH	2.0 M	
NO	SPECIFICATION STANDARD	QT' Y	REMARK

Type	Multi-Mode
Insertion Loss	≤0.3dB (IEC 61300-3-4)
Return Loss	NA
Test Wavelength	850nm
Group Refractive Index	1.482 @850nm 1.477 @1300nm


SYNERGY 21									
CUSTOMER				ITEM NO.	S215510				
PRODUCT NAME	Pigtail set LC/UPC OM5 50/125µm 12 different colors 0.9			Manufacture Country	CHINA	UNIT	MM		
DRAWNBY	CHECKBY	APPOBY	DATE						
SYNERGY 21	SYNERGY 21	SYNERGY 21	2018-3-21						

Add refractive index and Artikel NO		2019-2-11	A1
NEW		2018-3-21	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE
			REV.

SYNERGY 21®														
TEST Protokoll														
Typ:SYNERGY	ITEM No.			Artikel NO.										
Produkt Beschreibung:														
Stueckzahl :1 Stk														
Einfuegedaempfung nach DIN 18600 Verfahren 7														
Wellenlaenge 850nm														
	Erlaubte	Verlust	blue	orange	green	brown	grey	white	red	black	yellow	violet	pink	turquoise
Steckerdaempfung	0,3 dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB
Return Loss (MM)														
Ergebnis	OK													
Datum:														
Achtung LWL Komponenten														
- Vorsichtig handhaben -Mindestbiegeradius von 40mm nicht unterschreiten -Stecken u. loesen der Verbindung nur durch														
Handhabung am Steckergerhaeuse														
Nicht am Kabel ziehen!!!														
-Reklamationen in diesem Bereich koennen wir nicht anerkennen. -Ferrulen stets durch Staubschutzkap schuetzen und vor jedem Einsatz saeubern.														

Chart:

ITEM NO.	LENGTH.	Artikel NO.	EAN Nummer	PACKING
S215510	2.0M	151074	4038816074041	SYNERGY 21 BAG A

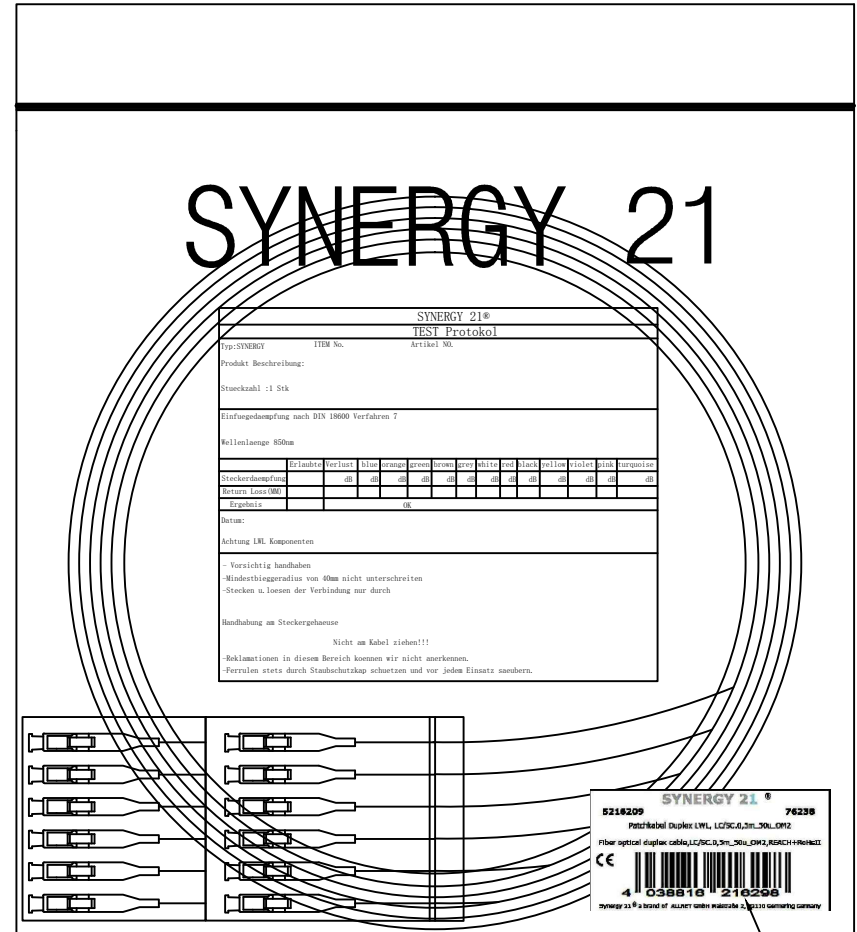

PACKING: PE BAG + LABEL + TEST REPORT

SYNERGY 21										
CUSTOMER								ITEM NO.	S215510	
PRODUCT NAME		Pigtail set LC/UPC OM5 50/125µm 12 different colors 0.9				Manufacture Country		CHINA	UNIT	MM
DRAWNBY		CHECKBY		APOBY		DATE				
BY	CHK	REVISION RECORD MODIFICATIONS				DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21
						2019-2-11	A1			
		NEW				2018-3-21	A			
		Add refractive index and Artikel NO								