
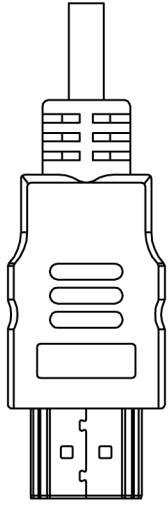


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/11/23	


Length

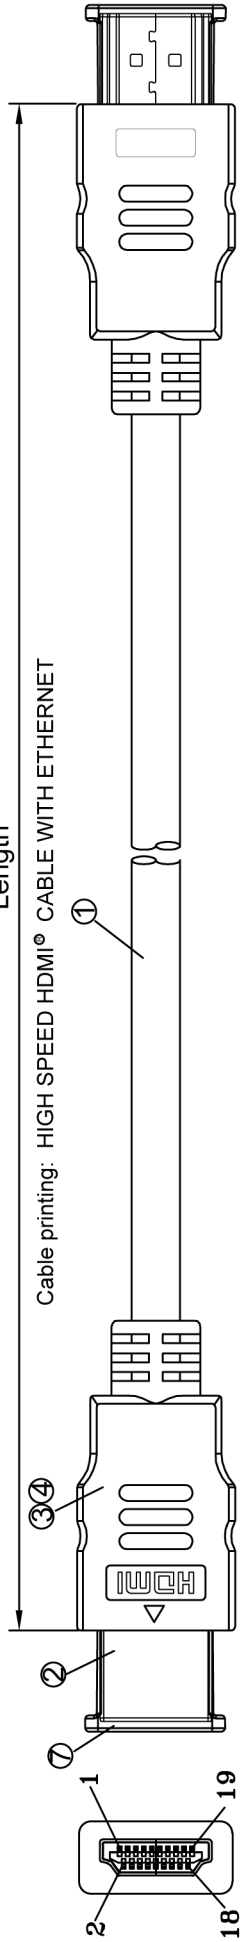


Remark:

- 1.100% Open/Short Test
- 2.Conductive Resistance:15ohms MAX
- 3.Insulation Resistance:5M ohm MIN.
- 4.HI-POT:DC 300V/10MS.
- 5.The product is Reach/RoHS 2.0 compliant.
- 6.Support 4K*2K@60Hz

Signal Assignment

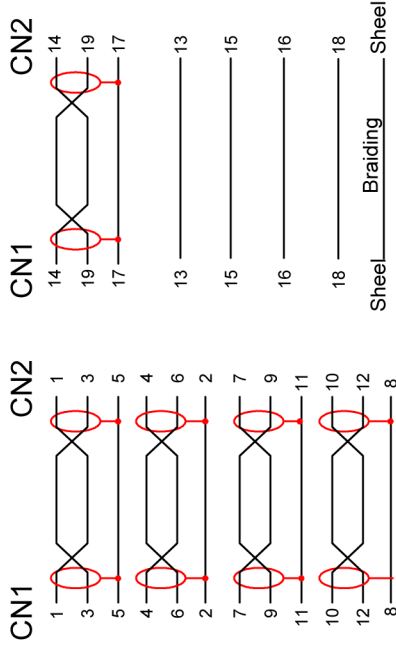

Cable Spec.

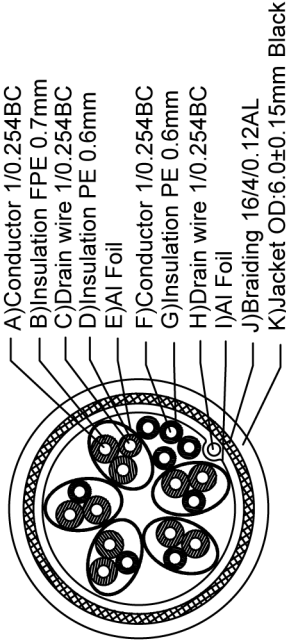

Item NO.	Length
K5431SW.0.5	0.5m
K5431SW.1	1.0m
K5431SW.2	2.0m
K5431SW.3	3.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK
⑤	HDMI Protective Cap, PE		2PCS	
④	External Mold	Outer Mould 45P PVC, Black	2PCS	
③	Internal Mold	Inner Mould PE	2PCS	
②	Connector	HDMI A PLUG PIN, Gold-Plated	2PCS	
①	Cable	30AWG 2.0V (19+1BC) 64ALB HDMI Cable OD:6.0mm (0.254BC+FPE)*1P+D+AL] *5C + (0.254BC+HDPE)*4C + AL + D + 64ALB PVCOD6.0mm		

ERP NO.:	SAMPLE DWG NO.:
DOC No.:	REVISION
CUSTOMER:	UNIT
CUSTOMER P/N:	SCALE
DESCRIPTION	PAGE NO
APPROVAL	DATE
CHECKED	DRAWN

TOLERANCES UNLESS OTHERWISE STATED
X = ±1
XX = ±0.2
XXX = ±0.1