
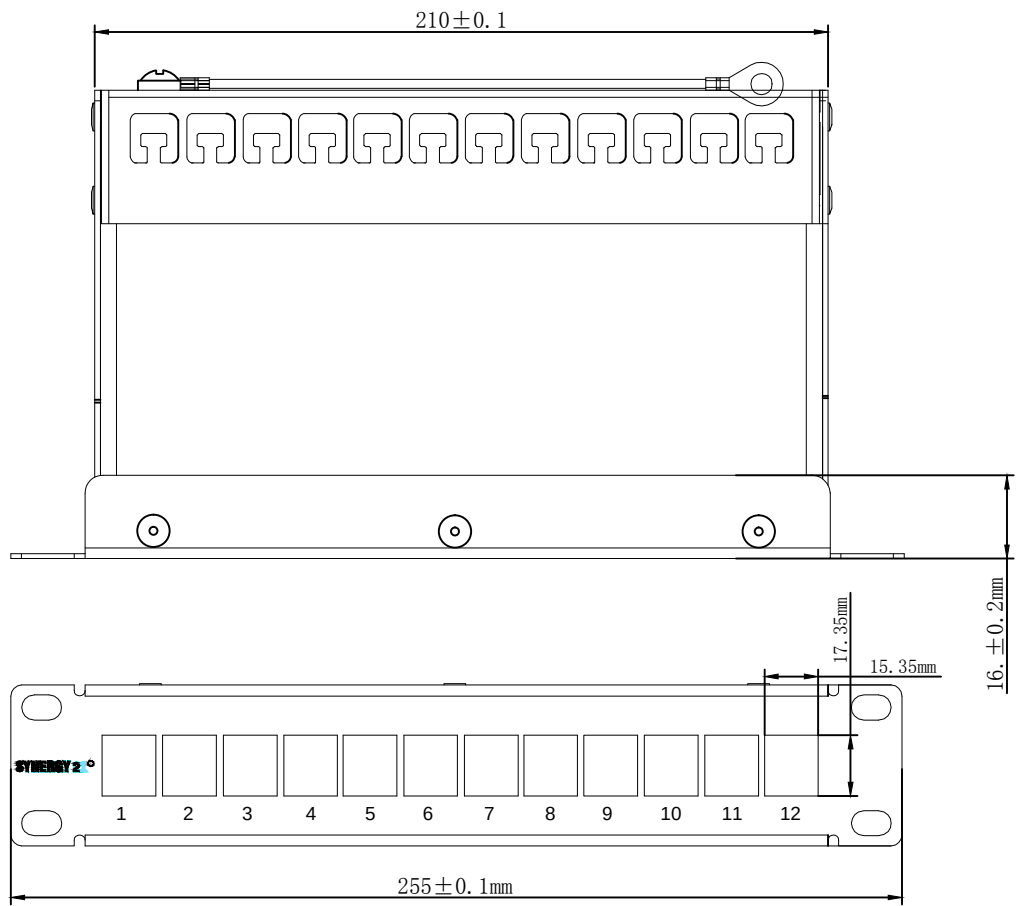


NOTE:

- 1. PANEL FRAME:SPCC CARBON STEEL T=1.2MM POWDER COATING
- 2. PANEL bracket SPCC NICKEL PLATING
- 3. BODY COLOR: GREY RAL7035
- 4. RoHS Compliant
- 5. Apply to the keystone jack which the width less than 17.4mm
- 6. "1 2 3.....24" Color: black Font : Arial H:3.35MM
- 7. Accessory:
 - 1. Cable Tie(140×3.0mm)×12Pcs
 - 2. Screw and Nut M6*18mm × 4set

						SYNERGY 21				
						CUSTOMER		ITEM NO.	S216332	
		UPDATE PACKING TYPE	2018-03-20	A1	PRODUCT NAME	12port BLANK PATCH PANEL 10" GREY	manufacture country:	CHINA	UNIT	MM
		NEW	2014-12-03	A	DRAWNBY	CHECKBY	APPOBY	DATE		
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2018-03-20		

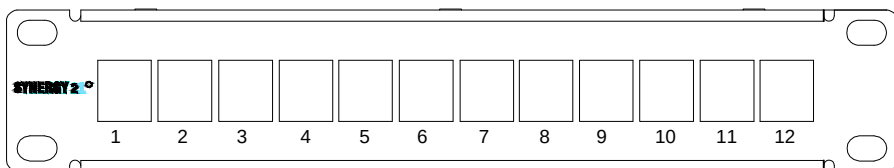

LABEL 1

SHIPPING MARK




PO NO. :
REACH and ROHS 2.0 Compliant
MADE IN CHINA

SIDE MARK



PO NO. :
Item no:
Q' TY:
N. W
G. W
Carton no.
MEAS.

"SYNERGY 2 ⑩" for black printing The pantone of Color is black c
"1" for blue printing The pantone of Color is 298C

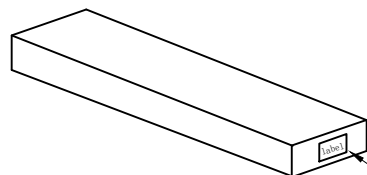

label 1

1pcs/box+Label

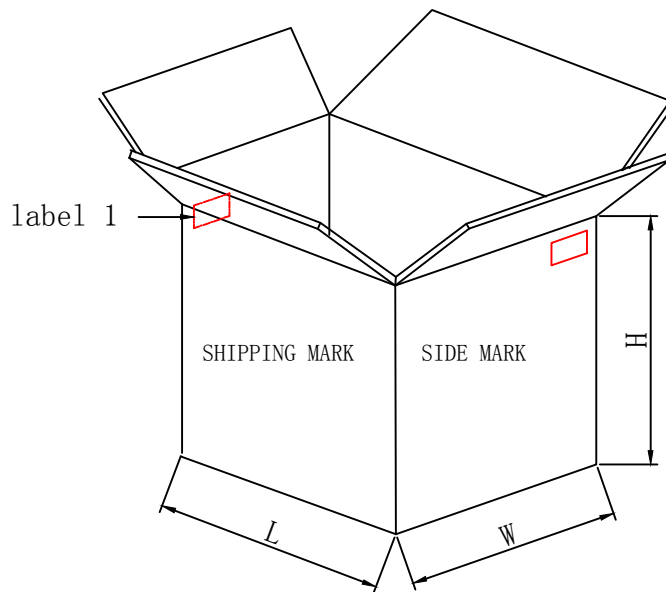


20pcs/Carton+Label 1


NOTE:

- 1.pcs/box+Label 1, 20pcs/Carton+Label 1
2. “工” type sealing
3. “井” type packaging



						SYNERGY 21				
						CUSTOMER			ITEM NO.	S216332
		UPDATE PACKING TYPE	2018-03-20	A1		PRODUCT NAME	Packing	manufacture country:	CHINA	UNIT MM
		NEW	2014-12-03	A		DRAWNBY	CHECKBY	APPOBY	DATE	
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.		SYNERGY 21	SYNERGY 21		2018-03-20	



16.5±0.2

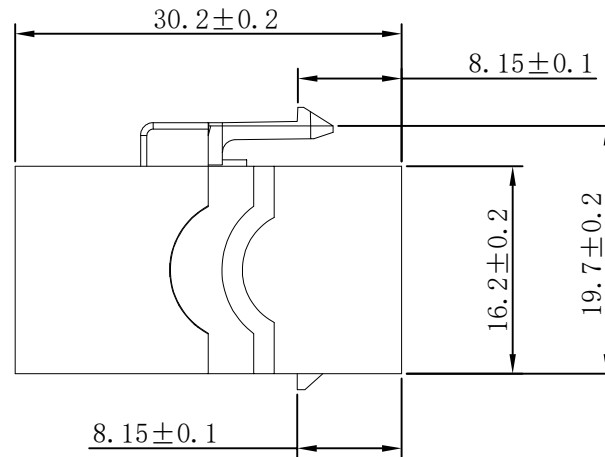

Connection Method

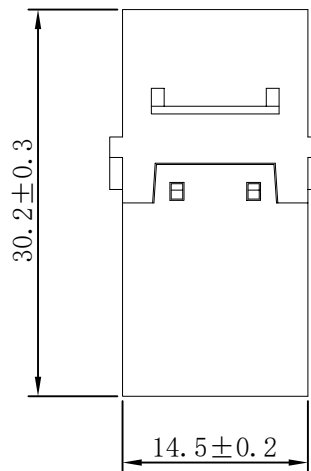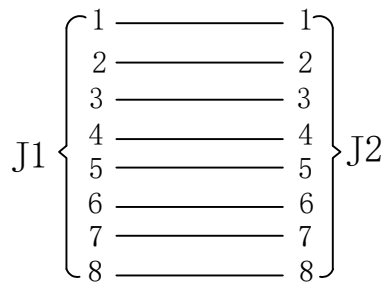

MATERIAL LIST:

④	Shrapnel	PC White	1	
③	Contact	8P8C Gold Plated	16	
②	Housing	Zinc Alloy	1	
①	PCB	FR-4, t=0.8	1	
NO	MAT. NAME	DESCRIPTION	QT'Y	REMARK

NEW					2025-4-2	A0	SYNERGY 21			
REVISION RECORD MODIFICATIONS					DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2025-4-2

NOTES:

ELECTRICAL:

- Contact Resistance : 20MΩ MAX
- Insulation Resistance : 500MΩ MIN @ 500V DC
- Withstand Voltage : DC 1000V AC 700V RMS 60Hz, 1MIN
- Component testing for Cat.6A to ISO/IEC 11801 Ed.2.2:2011-06
DIN EN 50173-1:2011-09
TIA/EIA-568.2-D (2009-08)

ENVIRONMENTAL:

- Storage : -40℃ T0+70℃
- Operation : -10℃ to+60℃

MECHANICAL

- RJ45 Contact Life: 750 Times Min
- Plug inforce:<30N

RoHS 2.0 and REACH Compliant

PACKING:1PCS/PE bag+lable1,10PCS/PE Bag+Lable 2, 50PCS/small box, xxPCS/CTN+LABLE 3

SYNERGY 21										
CUSTOMER		AN			ITEM NO.		S216317V4			
PRODUCT NAME		CAT.6A STP RJ45 F/F Coupler Keystone jack Type Zinc Alloy Housing				manufacture country:		CHINA	UNIT	MM
DRAWNBY			CHECKBY		APPOBY		DATE			
SYNERGY 21			SYNERGY 21		SYNERGY 21		2025-4-2			