



ALLNET PCIe 10G x8 Quad SFP+ Fiber NIC Server Adapter - ALL0141-4SFP+-10G

>>> [Go to the shop article](#)

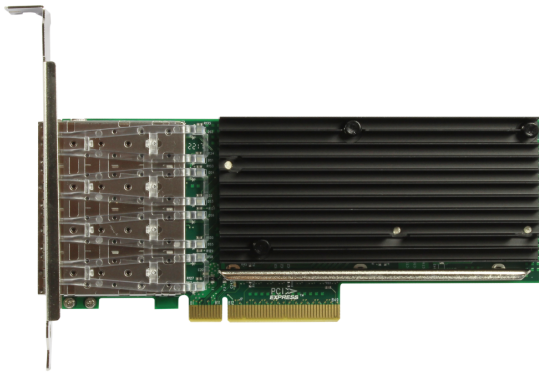

EAN CODE

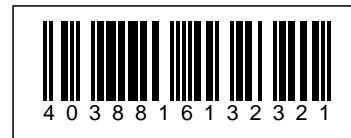

Highlights:

- Quad-port 10GbE SFP+ server adapters
- PCI Express (PCIe) v3.0, 8.0 GT/s, x8 lanes
- SFP+ connectivity
- PXE, iSCSI boot
- Network Virtualisation
- IEEE 802.1q and 10G Ethernet specification compliance
- Data Plane Development Kit (DPDK) support
- Excellent small packet performance for network appliances and Network Functions Virtualisation (NFV)
- Low Profile and Full-Height bracket

ATTENTION: Only works ONLY with INTEL-compatible SFP+ modules, see accessories.

Overview:

ALL0141-4SFP+-10G is ALLNET a new generation of high- performance server adapter, based on the Intel XL710-BM1 controller. The Server Adapter addresses the demanding needs of the next-generation agile data centre by providing unmatched features for both server and network virtualisation, flexibility for LAN and SAN networks and proven, reliable performance.

The ALL0141-4SFP+-10G adapter delivers superior performance in a PCI Express v3.0 x8 slot. Optimised



performance vectors and key uses include:

1. Small Packet Performance:

Achieves wire-rate throughput on smaller payload sizes (>128 Bytes for 40 GbE and >64 Bytes for 10 GbE)

1. Bulk transfer performance:

Delivers line-rate performance with low CPU usage for large application buffers

1. Network Virtualisation:

Network virtualisation overlay offloads including Geneve, VXLAN, and NVGRE

1. Storage performance:

Enables competitive performance with native OS drivers and intelligent offload for NAS (NFS, SMB), and SAN (iSCSI and FCoE)

Key Features

- Quad –Port 10GbE Server Adapter
- PCI Express* (PCIe) 3.0, x8
- Exceptional Low Power Adapters
- Network Virtualisation offloads including Geneve, VXLAN and NVGRE
- Intel® Ethernet Flow Director for hardware based application traffic steering
- Intel® Data Plane Developer Kit (DPDK) optimised for efficient packet processing
- Excellent small packet performance for network appliances and Network Function Virtualisation (NFV)
- Intelligent offloads to enable high performance with Intel® Xeon® processor-based servers
- I/O virtualisation innovations for maximum performance in a virtualized server
- Unified networking providing a single wire support for LAN and storage: NAS (SMB, NFS) and SAN (iSCSI, FCoE)

A Complete, Unified Networking Solution

Converging data and storage onto one fabric eliminates the need for multiple adapters, cables and switches. Furthermore, both 10 and 40 gigabit Ethernet provides the bandwidth to converge these multiple fabrics onto a single wire. A key capability that makes all this possible is traffic class separation provided by Data Centre Bridging (DCB) providing a one-wire solution with virtual pipes for the different classes of traffic:

- Data: Best effort delivery of standard LAN traffic
- Storage: Lossless network for FCoE and iSCSI
- Management: Guaranteed connectivity of data centre IP management

Power Savings

Power efficiency is critical to IT specialists as energy consumption is a real OpEx concern.

- Lowest Power Consumption

The new generation of ALL0141-4SFP+-10G adapters are power misers. They deliver double the throughput with only half the power of the previous

Energy Efficient Ethernet (EEE)

Reduces power consumption during periods of low data activity. Energy is used to maintain the physical layer transmitters in a "ready state" to transmit data on the wire. During periods of low data traffic, EEE sends a low-power idle signal to put the transmitters into a "low power state" saving power and cost. When data needs to be sent, EEE sends a normal idle signal to wake up the transmit system before data is due to be sent so there is no degradation of performance.

Server Virtualisation

With the INTEL Virtualisation Technology (VT), the ALL0141-4SFP+-10Gadapter deliver outstanding I/O performance in virtualized server environments. They reduce I/O bottlenecks by providing intelligent offloads for networking traffic per virtual machine (VM), enabling near-native performance and VM scalability. The host-based virtualisation technologies supported by Intel VT include:

- VMDq for Emulated Path:

Adapter-based VM queue sorting enabling efficient hypervisor-based switching

- SR-IOV for Direct Assignment:

Adapter-based isolation and switching for various virtual station instances enabling optimal CPU usage in virtualised environments. Additionally, ALL0141-4SFP+-10G provide Virtual Bridging support that delivers both host-side and switch-side control and management of virtualised I/O as well as the following modes of virtualized operation:

VEPA : IEEE 802.1Qbg support for Virtual Ethernet Port Aggregator

VEB: Virtual Ethernet Bridge support via Intel® VT

Network Virtualisation

Network virtualisation is the next big trend in creating an agile data centre. The ALL0141-4SFP+-10Gadapter is ready to help you take that next step.

- VXLAN, NVGRE, GENEVE Offloads:

With Intel Virtualisation Technologyperformance for overlay networks. With these offloads it is possible to distribute network traffic across CPU cores. At the same time XL710 offloads LSO, GSO, and check-sum from the host software reducing CPU overhead.



Intel® Ethernet Flow Director

Flow Director is an advanced traffic steering capability built into the XL710 controller. It consists of a large number of flow affinity filters that direct receive packets by their flows to queues for classification, load balancing, and matching between flows and CPU cores. It eliminates context switching required within the CPU. As a result, Flow Director significantly increasing the number of transactions per second and reduces latency for cloud applications like Memcached.

Intelligent Offloads

The Intel Xeon processor family has demonstrated increased computing performance and increased integration of key server subsystems generation after generation. To offload is to leverage the ever-escalating computing power of the Xeon processor where appropriate and implementing complementary accelerations in the network controller—this is what Intel refers to as "intelligent offloads." By employing a balanced hybrid of compute and offload, intelligent offloads are able to achieve the optimised point of performance and efficiency. This is most notably observed in the following usage models:

- TCP Stateless Offloads:

Demonstrates leading performance vs. TOE solutions without restricting feature usage (TOE usage usually requires that key features be disabled). Supported stateless offloads include Checksum, TSO, VMDq, and RSS.

- Host iSCSI /FCoE Initiators:

Providing exceptional performance without the need for full-offload HBA2 methods.

- Flow Classification:

Trafficking data flows across multiple consumers and connections.

Manageability

ALL0141-4SFP+-10G also incorporate the manageability required by IT personnel for remote control and alerting. Communication to the Board Management Controller (BMC) is available either through an on-board SMBus port or the DMTF-defined NC-SI, providing a variety of management protocols, including IPMI, BMC Pass-thru, OS2BMC, and MCTP/SMBus and MCTP/PCIe.

Features General

Intel® XL710-BM1 40 Gigabit Ethernet Controller SFP+ Connectivity

Low-profile full-height

Load balancing on multiple CPUs iSCSI remote boot support

Fibre Channel over Ethernet (FCoE) support Support for most network operating systems RoHS-compliant

Intel® PROSet Utility for Windows*Device Manager Time Sync (IEEE 1588*, 802.1as)



I/O Features for Multi-core Processor Servers

Intel® Flow Director MSI-X support
Multiple queues: 1,536 Tx and Rx queues per port
Tx/Rx IP, SCTP, TCP, & UDP checksum offloading (IPv4, IPv6) capabilities

Virtualisation features

Next-Generation VMDq
Up to 256 maximum VMDq VMs supported
PCI-SIG SR-IOV implementation (128 per device) Virtual Machine Load Balancing(VLMB) Advanced Packet Filtering
VLAN support with VLAN tag insertion, stripping and packet filtering for up to 4096 VLAN tags
VXLAN and NVGRE Support

Manageability Features

Preboot Execution Environment (PXE) support
Simple Network Management Protocol (SNMP) and Remote Network Monitoring (RMON) Statistic Counters
iSCSI Boot Watchdog Timer

Adapter Product Features

Intel® PROSet Utility
Plug and play specification support Receive Side Scaling

Advanced Software Feature

Adapter fault tolerance (AFT) Switch fault tolerance (SFT) Adaptive load balancing (ALB) Teaming support
IEEE 802.3ad (link aggregation control protocol)
PCIe Hot Plug*/Active Periphera component interconnect (PCI)
IEEE 802.1Q* VLANs
IEEE 802.3 2005* flow control support
Tx/Rx IP, TCP, & UDP checksum offloading (IPv4, IPv6) capabilities (Transmission control protocol(TCP), user datagram protocol (UDP), Internet protocol (IP) IEEE 802.1p*
TCP segmentation large send offload
MSI-X supports Multiple Independent Queues interrupt moderation
Ipv6 offloading — Checksum and segmentation capability extended to new standard packet type

Network Operating Systems (NOS) Software Support

Windows Server* 2012 R2; Windows Server 2012 R2 Core; Windows Server 2012; Windows Server 2012 Core;
Windows Server 2008 R2; Windows Server 2008 R2 Core;
Linux* Stable Kernel version 2.6.32/3x; Linux* RHEL 6.5 and RHEL 7.0;
Linux* SLES 11 SP3 and SLES 12; FreeBSD* 9 and FreeBSD* 10;



UEFI* 2.1;
UEFI* 2.3;
VMware ESXi 5.1 (Limited Functionality); VMware ESXi 5.5

Technical details:

Controller	Intel XL710
Transmission Rate Per Port	10000Mbps
Network Standard Physical Layer Interfaces	10GBASE-SR, 10GBASE-LR
Jumbo frame support	Up to 9.5 KB
Operating Temperature	0° to 55°(32°F to 131°F)
Network Virtualisation	VLAN, VLAN tag, VXLAN, NVGRE, GENEVE, VLMB
LED indicators	Link Yellow, 10Gb/s: Green blinking
SYSTEM SUPPORT	Windows Server 2008 R2 / 2012 / 2012 R2 / 2016 R2
	Windows 7 / 8 / 8.1 / 10
	FreeBSD 11.0 or later
	Linux SLES 11 / 12 or later
	Linux Stable Kernel version 2.6.x/3.x/4.x or later
	VMware ESX/ESXi 5.x/6.x or later

Accessories

Part No.	Name
175260	GBIC-Mini, SFP+, 10GB, TP(RJ45), 10GBASE-T, kompatibel für Intel, Intel-Code
152074	GBIC-Mini, SFP+, 10GB, SR/LC, kompatibel für Intel,
152073	GBIC-Mini, SFP+, 10GB, LR, kompatibel für Intel,