



## Synergy 21 LED round light transparent 26W HL ww

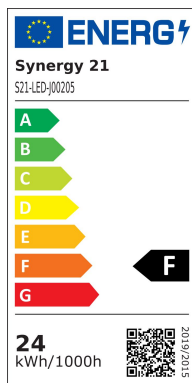

kwh/1000h:	24,00
Lumens:	2450
Watt:	24,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C



Synergy 21 LED round luminaire transparent  
Light-conducting lampshade: round and suspended (HL)  
Connection: 200-240 V/AC  
Wattage: 26 watts  
Lumen: 2450lm  
CRI: >80  
Light colour: warm white  
Kelvin: 3000 ±200K  
Operating temperature: -20° +45° C  
Beam angle: 360°  
Size: Ø380mm  
Height: 88mm  
Weight: 2500 g  
Protection class: IP20 / IK05

### Mounting:

Ceiling box with ceiling bracket, steel cable  
2 screws and dowels included.

Please check whether the wall plugs are the right ones for your ceiling!

Energy efficiency class: A+


kWh/1000h: 24

Image similar

## Attributes


Attribute	Value
Abstrahlwinkel:	360
Betriebstemperatur:	-20 bis +45
CRI:	>80
Dimmbar:	nein
Grösse:	Ø380*88
LED - Gehäusefarbe:	transparent
LED - Gehäusematerial:	Kunststoff
Lichtfarbe:	warmweiß
Lichtfarbe in Kelvin:	3000
Lumen:	2450
Schutzklasse:	IP20
Volt:	230
Weight:	2.5 Kg
Warranty:	60.00 Months

## Additional Images

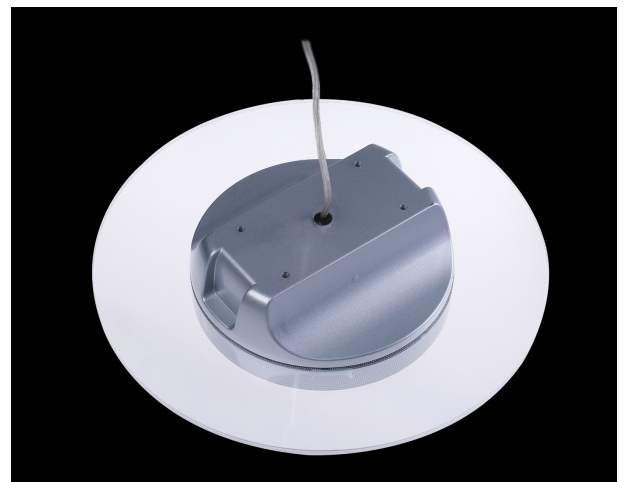



Dimension and Illumination Diagram



Height	Beam/Diameter	Angle: 158.05deg	Diameter
1.0m	75.22/1222lx		764.40mm
2.0m	18.76/309.7lx		1493.16mm
3.0m	8.346/124.8lx		2219.25mm
4.0m	4.696/70.13lx		2885.44mm
5.0m	2.705/40.62lx		3732.05mm

