


Synergy 21 LED office line suspension panel gray, dimmable



kwh/1000h:	66,00
Lumens:	5750
Watt:	60,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C



LED panel office line
Suitable for ceiling suspension (workplace lighting)


Frame colour: grey/silver RAL9006
Power consumption: 60Watt, 20W up, 40W down
Lumen output: 5750lm
Neutral white: 4100k ±150
Colour rendering: CRI >80
UGR: <19 with light downwards, no UGR upwards
Beam angle: 120° (total)
Operating temperature: -20° to +45°
Power supply: 100-240V
Power supply: built-in power supply, 0-10V dimmable
Size: 1200mm x 260mm x 30mm
Aluminium housing incl. ceiling mounting kit
Note: The LED cable with the black strip is connected connected to the black "LED-" terminal of the power supply unit, the unmarked cable is plugged into the red "LED+" terminal.

Energy efficiency class: A++
kWh/1000h: 66


Attributes

Attribute	Value
Abstrahlwinkel:	120
CRI:	80
Dimmbar:	Ja
Grösse:	1200*260
LED - Gehäusefarbe:	grau
Lichtfarbe:	neutralweiß
Lichtfarbe in Kelvin:	4100
Lumen:	5750
Weight:	5 Kg
Warranty:	60.00 Months

Additional Images

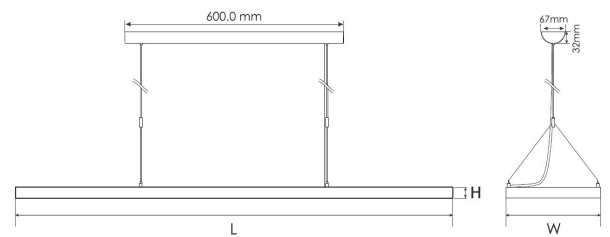

L*W*H=1200*260*30mm

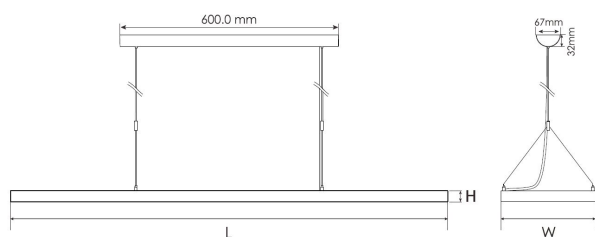

L*W*H=1200*260*30mm

